	MANUFACTURER SUPPLIER **SUBCONTACTOR PREQUALIFICATION CHECKLIST**	Project:	
		Ref:	
		Date of Issue	

Manufacturer/Supplier/Subcontractor: TONE UNIVERSAL TRADING LLC

Sl #	**Particulars**	**Availability**	
		Yes	**No**
1	Company Profile including location, contact and website details.	☑	☐
2	Project Quality Plan.	☑	☐
3	Organizational Structure	☑	☐
4	Commercial License from DED for Supply of Products	☑	☐
5	Commercial License from DED for Installation /Application of Products	☑	☐
6	Industrial License from UAE for manufacture of Product	☐	☑
7	Dubai Central Laboratory Department-DCL Product Conformity Certificate	☐	☑
8	Availability of product complying with project specification requirements	☑	☐
9	Product Details (Only relevant to the project)	☑	☐
10	Certification including authorized letter from manufacturer for supply/ installation/ application of product.	☑	☐
11	EHSS requirements related to risk associated with services offered	☑	☐
12	List of previous projects in the last 5 years including the total value for each project	☑	☐
13	Previous approval under the name of same supplier/ manufacturer/ installer	☑	☐
14	If it is manufacturing unit, then provide details of manufacturing facility, list of machinery, equipment's etc.	☐	☑
15	Copies of project completion/satisfactory supply completion certificate from Clients	☐	☑
16	List of manpower available. Also list of Laborers from Ministry of Human Resources & Emiratization	☑	☐
17	Draft Warranty	☑	☐

Note:

This form must be at the first page. Provide all requirements, prepare, and arrange in one box file as per the arrangement order. Place divider & label in each requirement.

Review by (Main Contractor's authorized representative): ____

Signature: _____

Date: _____

Project:

Client	
Consultant	
Main Contractor	
Kitchen Sub-Contractor	

T.ONE
UNIVERSAL TRADING L.L.C

01

COMPANY PROFILE

T.ONE

SWITCH TO A REFINED
KITCHEN EXPERIENCE

OUR MISSION

Although a lot has changed since 1946, our motivation remains the same. What drives the Keller team every day is making beautiful kitchens attainable; whether it's 1,000 kitchens for newly built homes, or five kitchens for a renovation project. That is the DNA of our company today - and has been since the very first kitchen.

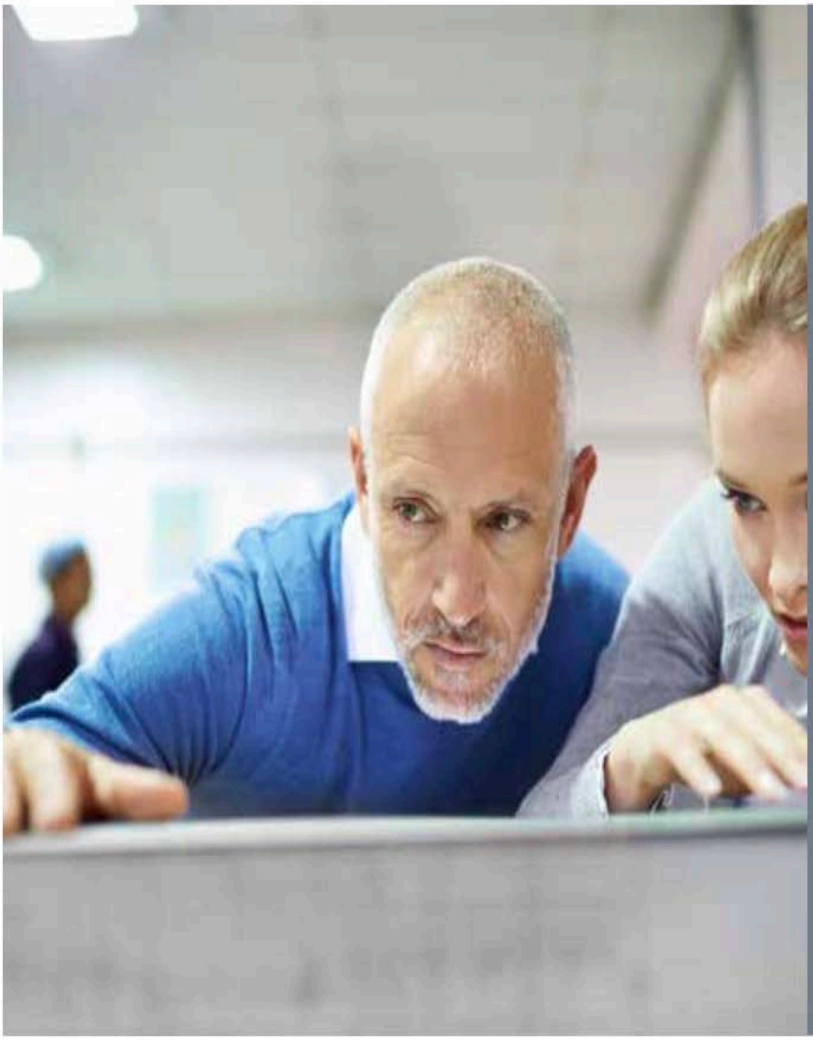

WHAT DRIVES US **EVERY DAY**...

This mission starts within Keller and is about the people. It's about how driven we are to make beautiful kitchens, no matter what the situation; every day. That's because everyone feels personally involved with customers, suppliers and with each other.

The kitchens are made with passion and it shows. It's also the enthusiasm with which Keller observes and accepts new challenges. This drive generates the energy to make beautiful kitchens attainable.

...IS MAKING BEAUTIFUL KITCHENS...

Beautiful is different to everybody. It's something personal. That's why we offer choices in styles, colours, details and finishes. It's how beautiful is made into something truly personal.

Beautiful is the standard, for every idea, every design and everything created. It was the standard in the past, it is now, and it will be in the future. Because the perception of what is beautiful changes with the years, Keller keeps track of new trends and technologies. It's one of the top priorities of the in-house design and product development team.

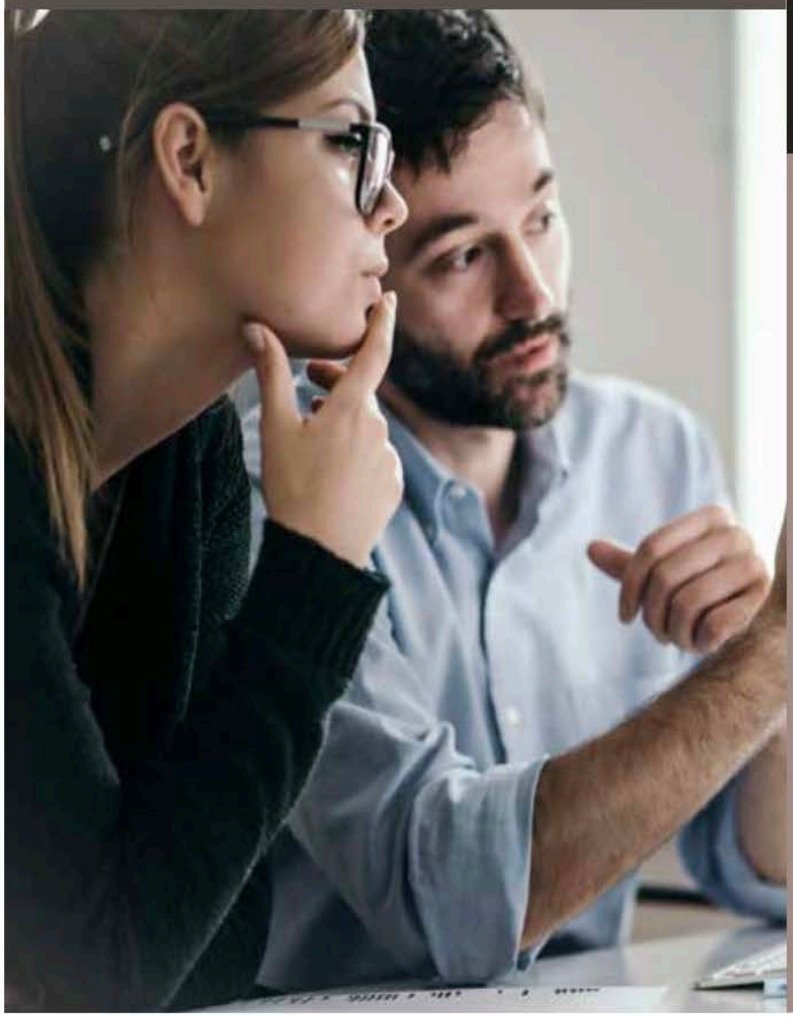

... ATTAINABLE.

Keller does not think that making beautiful kitchens is a challenge; but making beautiful kitchens attainable... that's a completely different story.

Now that's not something everybody can do. Trying to accomplish this ideal brings out the best - beautiful and attainable, for and with clients, designers and dealers.

Attainable means being surprisingly affordable for a lot of people who all have their individual wishes, needs and means - "surprisingly" because something which may be deemed impossible turns out to be attainable with Keller.

OUR VALUES

Keller Kitchens is more than the products and services. The way the company conducts business is at least as important. It is defined by the values the company promotes. That is unmistakably Keller Kitchens. Together these values form the Keller Kitchens brand: **alert**, **personal**, **attainable** and **beautiful**.

ALERT

Keller Kitchens is a synonym for alert; the brand that keeps a keen eye on its surroundings, alert to design, looks and trends with an attention to detail. Alert to signs from clients and others, whether they are positive or negative, Keller picks up on these signs and acts upon them: making beautiful kitchens attainable. A sustainable policy is also part of being alert.

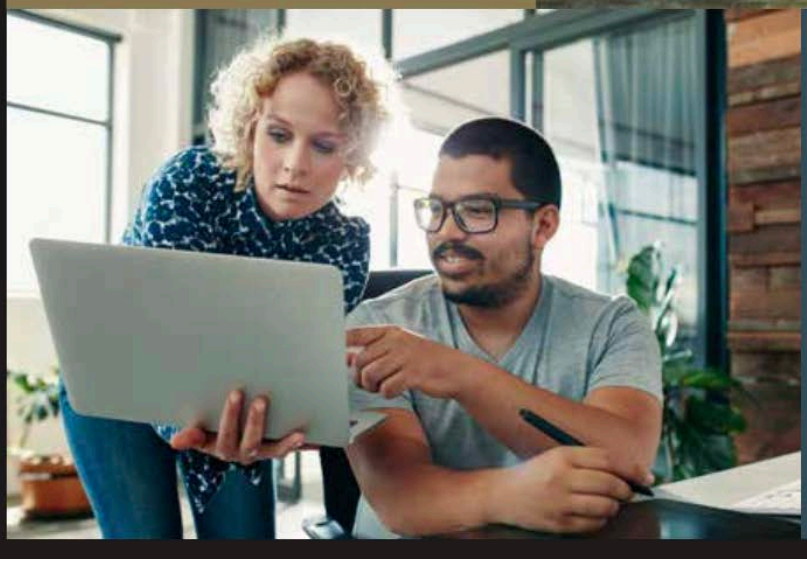

PERSONAL

Keller Kitchens is a personal brand which pays close attention to personal wishes. Whether it's about taste, budget or service, Keller listens and looks for a solution to make beautiful kitchens attainable. This requires involvement, creativity and cooperation.

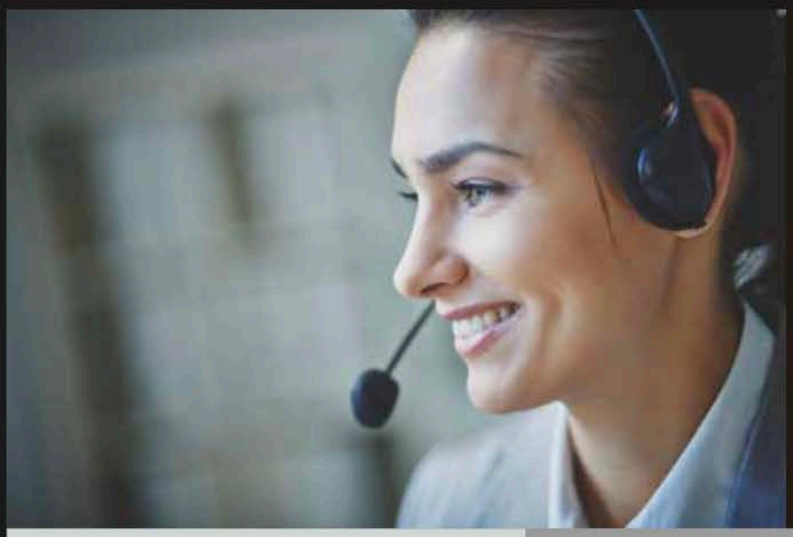

ATTAINABLE

To make beautiful kitchens attainable, Keller Kitchens offers a wide range of models and colours in all sorts of materials and finishes. By developing the right mix of these elements, the individual dream kitchens will be designed to fit any budget, without compromising style or design.

BEAUTIFUL

Keller Kitchens means beautiful. It's the brand that makes life and cooking in the kitchen more beautiful with every detail day in, day out. And, because beautiful is subjective, and means something different for everyone, the kitchens are offered in a choice of styles, colours, materials, details and finishes. That's how something that is subjective is made into something personal and beautiful.

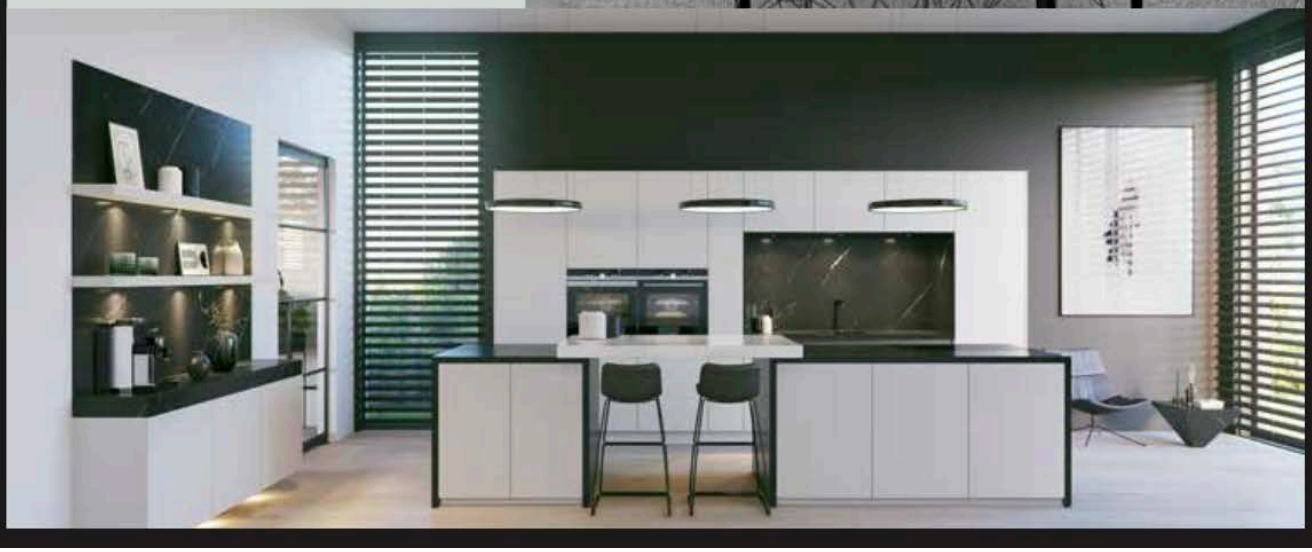

CARBON NEUTRAL PRODUCTION PROCESS

Beautiful and attainable are not only Keller's brand values; the ethos steers every decision made. The values also extend to the environment. For this reason, CSR is incorporated into the company's strategic focus. It's the only way Keller can provide the perfect balance between People, Planet & Prosperity. The results of this decision are clearly noticeable. It's the reason why Keller Kitchens, since April 2017, has a carbon neutral manufacturing process. This is the result of both carbon reduction as well as carbon compensation.

CARBON **REDUCTION**

This is how CO_2 emissions are reduced:

- Waste wood is turned into energy.
- Waste separation at source.
- Invalid products are recycled.
- 8,000 solar panels on factory roof.
- Energy-efficient LED lighting.
- Sustainable transport.
- Fully electronic lease fleet.

CARBON **COMPENSATION**

Keller compensates for the CO_2 emission levels that remain after the modern and green production process, by participating and investing in eco-friendly projects:

- Forest protection
- Wind energy
- Carbon farming

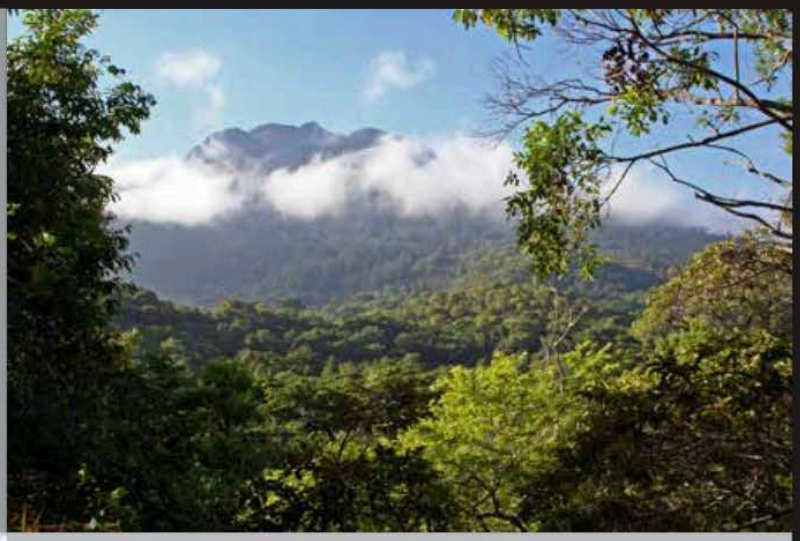

SUSTAINABLE PRODUCT & PACKAGING

- Water based lacquering and staining.
- Sustainable packaging.
- Chipboard & MDF fibreboard meet E1 & formaldehyde emission requirements.
- Laser edge technology reduces the use of glue dramatically.
- Ask for our FSC® certified kitchens*
- Development of a fully circular kitchen.

*FSC® C103968 / only available when chain of suppliers is FSC-certified

SUSTAINABLE DEVELOPMENT GOALS

In the past decades we've developed a sustainability strategy which has resulted in Keller being at the forefront of sustainable processes. For us it doesn't end here. We continue to work on new, ambitious goals. One of these ambitions is to link our CSR goals to the 17 sustainable development goals of the UN.

OUR EXPERIENCE

Personal kitchens can be realised for every project, whether it's five kitchens or 1,000. That is why we have an attractive, extensive programme which is fully geared for the contract market. With a unique business model, and years of experience, we can design, manufacture and deliver complete kitchens for any project.

Over 85 years of **experience**

The success of Keller kitchens did not appear out of the blue. Since our start in 1935, our high-quality kitchens found their way into hundreds of thousands of homes. Today, based on many years of experience and expertise, we are creating contract kitchens for our demanding clientele. And that is why Keller occupies a firm position in the top 10 of leading European kitchen manufacturers.

Any project, whether it's five or 1,000 kitchens

Personal kitchens are created for every project. With vast know-how, a personal approach, and a state-of-the-art factory, Keller produces personal kitchens for every buyer and delivers them to each specific apartment. For Keller, manufacturing and delivering 1,000 unique kitchens for the same project is as simple as making five identical ones.

Personal kitchens **for every segment**

Every project is different; the location, the target group and the price segment. With Keller, you can offer personal choices for any segment. We have an extensive expertise and experience in different contract segments in the Netherlands and abroad, e.g.

- Investors real estate
- Social housing/rental properties
- Leasure market
- Student housing
- Nursing homes

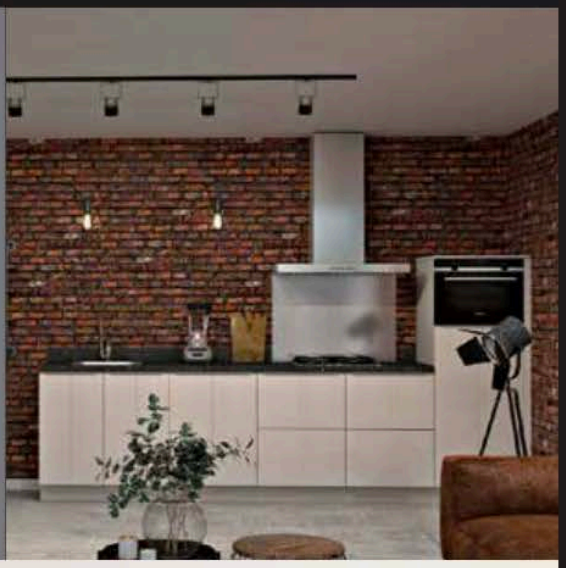

Experts in **export**

The Keller kitchen factory in Bergen op Zoom is only 40 minutes from Rotterdam Sea port. In 1983 Keller started exporting Keller Kitchens to the United Kingdom. Since then, the popularity of Keller Kitchens has crossed many borders. Keller kitchens now are sold on four continents. Our customer support department therefore has a broad experience in preparing logistics and customs.

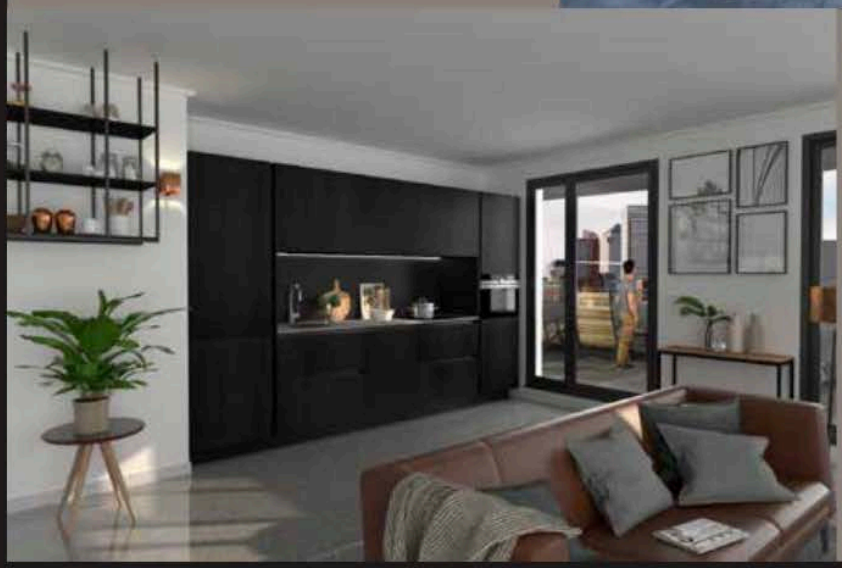

Strategic **partners**

We only work with a selected network of strategic partners. This way, customers are assured that design and installation of the kitchens are according to the highest standards.

We will gladly introduce you to one of our contract partners in your area.

100% MADE IN HOLLAND

Keller has been making kitchens from its own factory for more than 85 years. Opting for a Keller kitchen is opting for Dutch craftmanship and quality.

You can be sure of a product that is produced with care and attention for people and the environment.

WATCH OUR CORPORATE VIDEO

LASER FLEX

LACQUER DEPARTMENT

FULLY AUTOMATED PANEL FEEDER

56,000

Keller's manufacturing facility is one of Europe's largest and most modern, covering over 56,000 m2.

25,000

Each week 25,000 kitchen doors are pre-assembled.

2,500

In the factory, Keller manufactures an average of 2,500 kitchens per week.

16,500

The panel cutting saw processes 16,500 parts a week.

6,000

The dedicated assembly line can assemble 6,000 cabinets per week.

300

The manufacturing work force of 290 FTE makes sure the process goes quickly and is continuous.

250

250 trucks leave the manufacturing facility each week, delivering quality kitchens to satisfied clients.

OUR GROUP OF COMPANIES

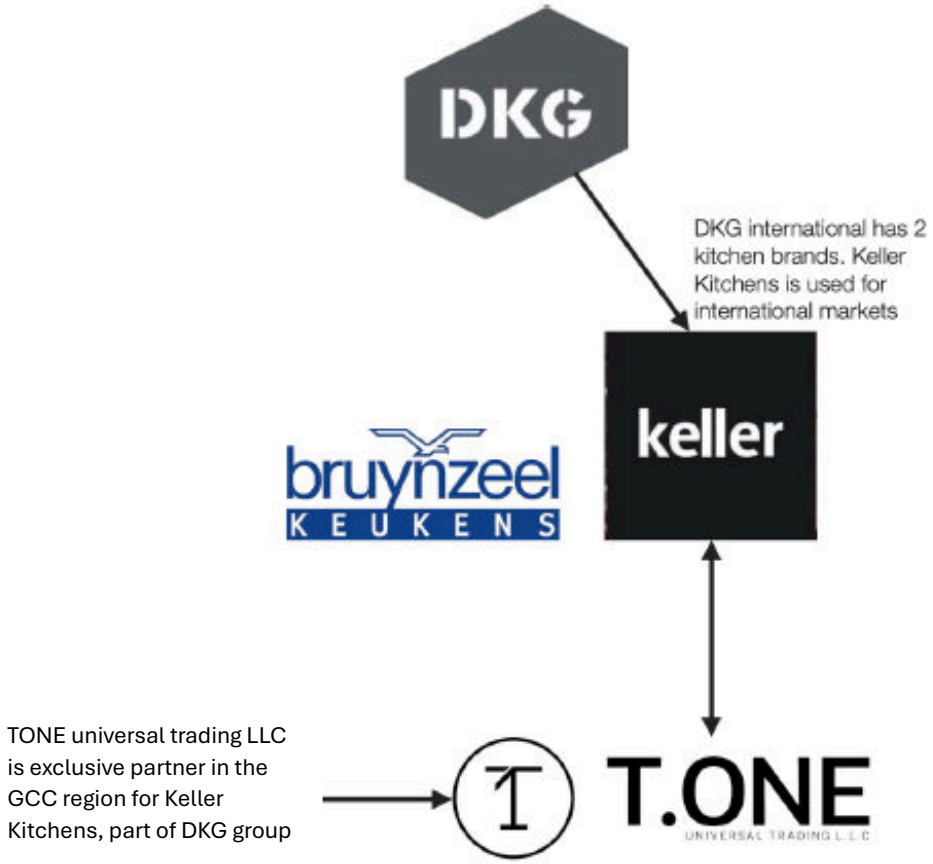

SUSTAINABILITY: GRI (GLOBAL REPORTING INITIAVE) STANDARDS

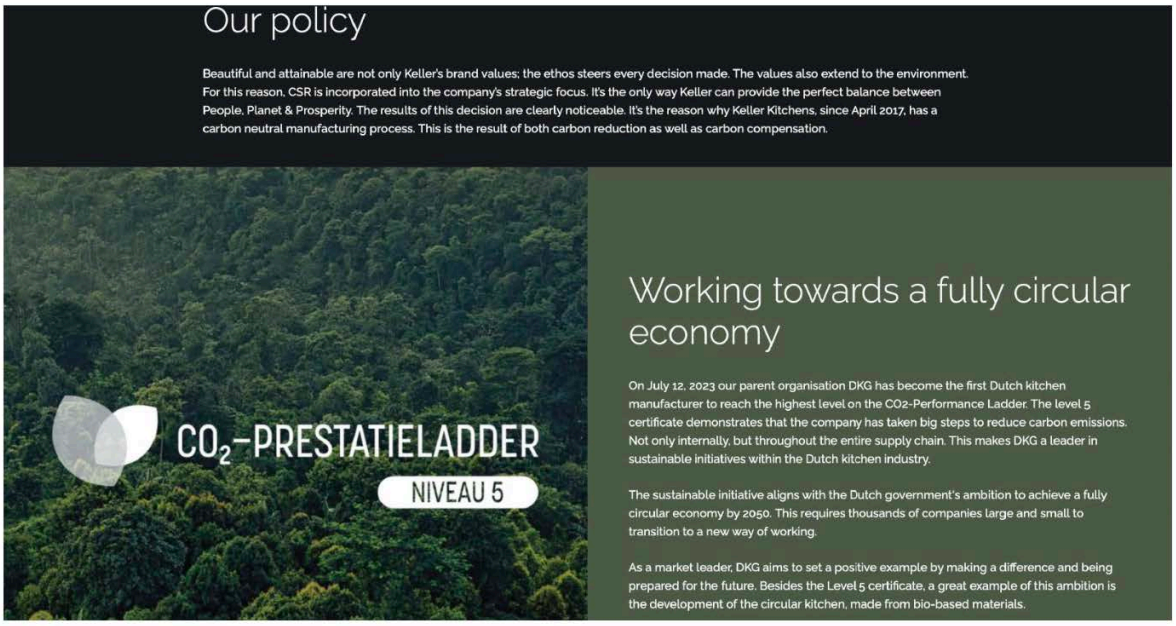

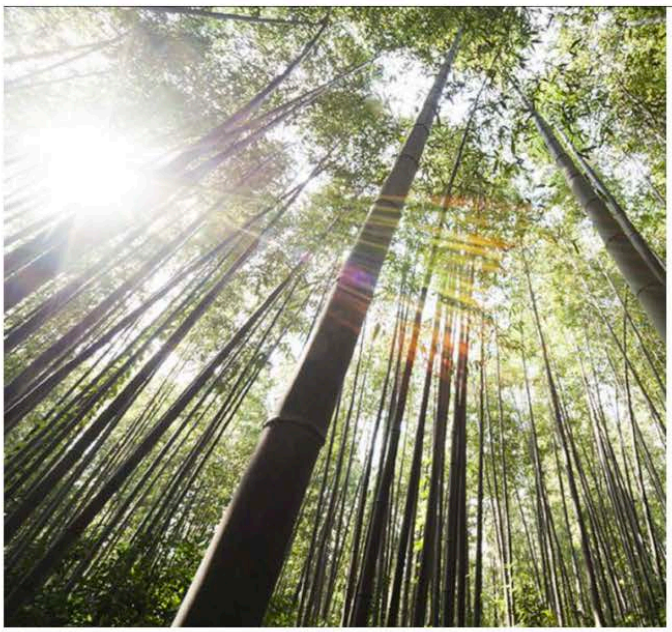

Global Reporting Initiative

Keller Kitchens has ambitious goals when it comes to CSR. To achieve them, a thought through strategy is needed. This will describe where we as a company want to be in the future, and what our take-off position is. That's why in 2016, we hired an external consultant to analyse all our CSR activities. The results of this research are processed into an extensive report using the guidelines of the Global Reporting Initiative (GRI).

Download the GRI table

Carbon reduction

This is how CO_2 emissions are reduced:

- ✓ Waste wood is turned into energy
- ✓ Waste separation at source
- ✓ Invalid products are recycled
- ✓ 8,000 solar panels on factory roof
- ✓ Energy-efficient LED lighting
- ✓ Sustainable transport
- ✓ Fully electronic lease fleet

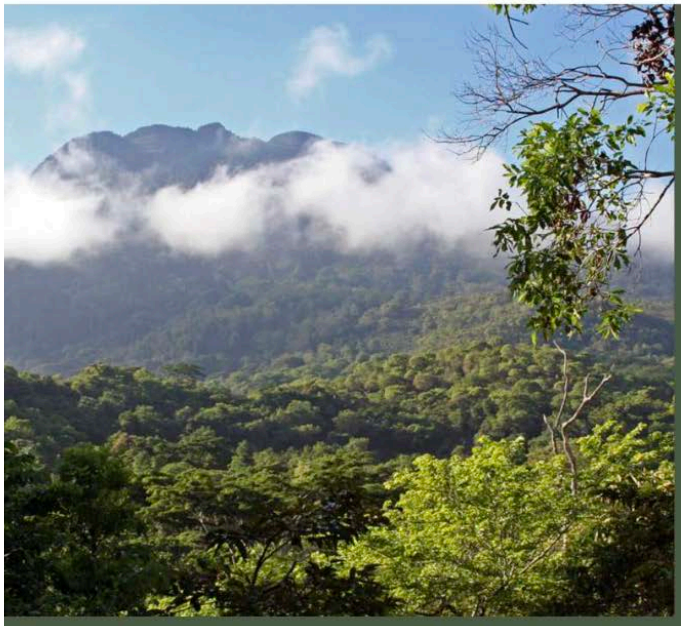

Carbon compensation

Keller compensates for the CO_2 emission levels that remain after the modern and green production process, by participating and investing in eco-friendly projects:

- ✓ Forest protection
- ✓ Wind energy
- ✓ Carbon farming

Link to Corporate Sustainability Report

HISTORY OF THE BRAND KELLER KITCHENS

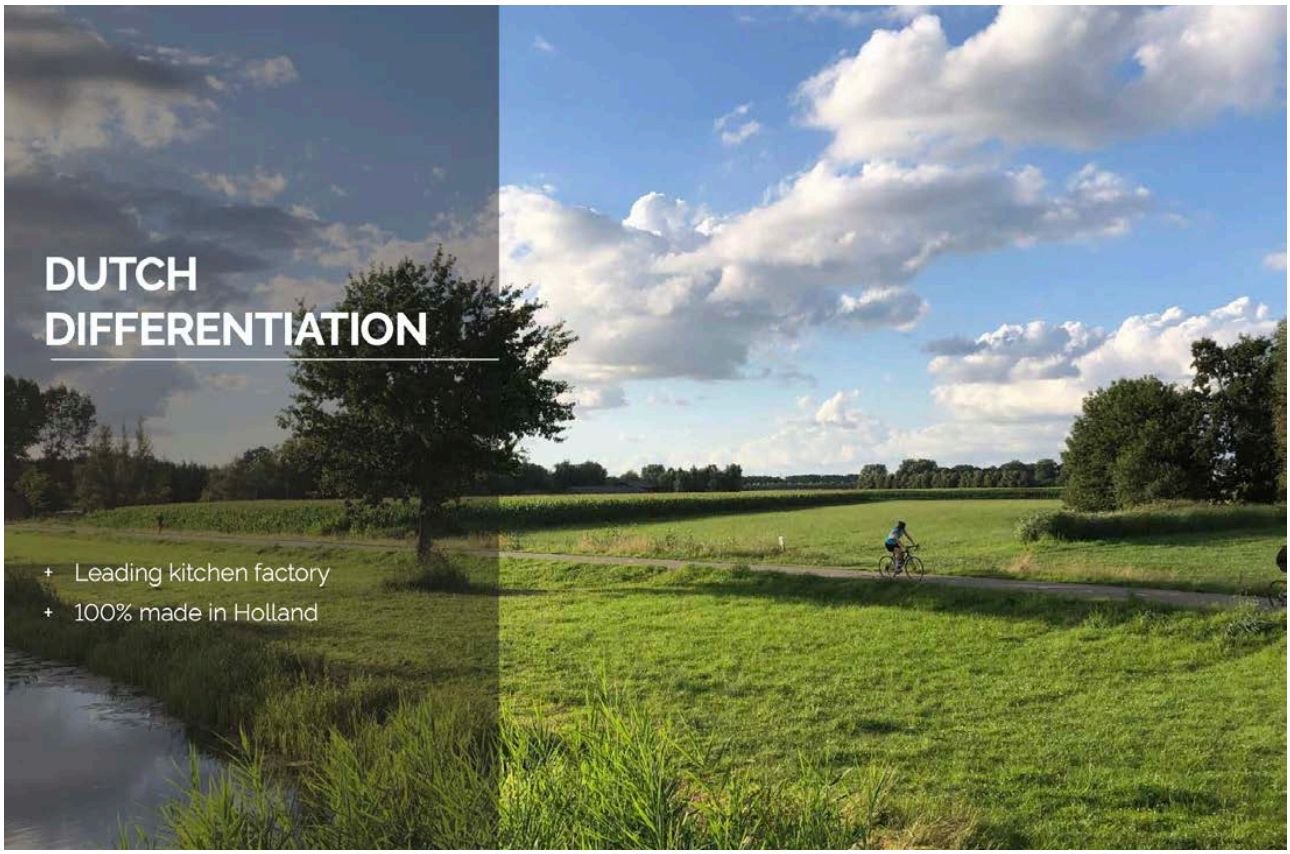

OUR STORY

With over 85 years of kitchen expertise, Keller Kitchens and its success story did not happen overnight. Since the company's foundation in 1935, Keller kitchens have found their way into hundreds of thousands of homes, both nationally and internationally.

In 1935 Gerard Keller, the son of a furniture maker, started a wood flooring business together with his brother, Henk. At first, they imported the floors but they quickly started manufacturing the products themselves. Due to the scarcity of raw materials during WW II, they started making small pieces of furniture from railway sleepers. It was this persistence and creativity that got them through the war successfully. And that didn't go unnoticed...

Today, this is still the foundation on which Keller is based and on which the company has built such a great reputation in the international kitchen market. With experience and expertise in the business-to-business market, Keller designs and produces beautiful kitchens which are attainable for modern day clients; not only in the Netherlands, but also across the oceans. Ever since the eighties, Keller has been shipping kitchens abroad. Today, Keller's kitchens are being sold in the Netherlands, Belgium, Dubai, Egypt, France, India, Malta, Morocco, Oman, Portugal, Spain, Switzerland and the USA.

1935

TOGETHER WITH HIS BROTHER HENK, GERARD KELLER STARTS THE PRODUCTION OF WOODEN LOORS AND LATER FURNITURE.

1946
Start production of kitchens for real estate projects

1948
Start production of luxury kitchens

1968
Production moves to Roosendaal

1973
Start of dealer network

1983
Start of export

1996
New 2.500m2 distribution centre

2004
Expansion of logistics centre to 3.700 m²

2006
Increase in the number of machines

2010
Integration with DKG Groep

2015
Production moves to the new factory in Bergen op Zoom

2017
Carbon neutral production process

2018
Four CSR-certificates obtained

- ISO 9001:2015 (quality)
- ISO 14001:2015 (environment)
- Level 3 on CO_2-performance ladder
- Level 4 on CSR Performance ladder

2020
New DKG Inspiration Centre

2021
Start building new head office DKG Group

GRI STANDAARDEN

De richtlijnen voor duurzaamheidsverslaggeving van het GRI (Global Reporting Initiative) is een internationaal erkende standaard voor het opstellen van een duurzaamheidsverslag.

Keller Keukens heeft onlangs onderzoek laten doen naar haar MVO-activiteiten. Hier is door een onafhankelijke partij, aan de hand van de GRI-richtlijnen, verslag van gedaan. Hieronder volgen de resultaten op basis van de meting over het verslagjaar 2021.

GRI 102: ALGEMENE TOELICHTING

1	ORGANISATIEPROFIEL	
102-1	Naam van de organisatie	Keller Keukens B.V. Onderdeel van DKG Holding B.V.
102-2	Activiteiten, merken, producenten en diensten	Productie en verkoop van keukens. In Nederland en Engeland.
102-3	Locatie hoofdkantoor van de organisatie	Bergen op Zoom
102-4	Landen waar de organisatie actief is	Nederland, Engeland.
102-5	Eigendomsstructuur en de rechtsvorm	DKG Holding B.V. is eigenaar.
102-6	Afzetmarkten	Nederland, Engeland.
102-7	Omvang van de organisatie	880 fte per 31-12-2021. Omzet DKG Groep > €220 miljoen
102-8	Informatie over personeelsbestand en andere medewerkers	Opgenomen in online MVO verslag. People indicatoren uitgewerkt.
102-9	Beschrijving van de keten	Verwerking van houten plaatmateriaal tot keukens. Verkoop keukens en keukenapparatuur.
102-10	Significante veranderingen voor de organisatie en de keten	
102-11	Toelichting over de toepassing van het voorzorgsprincipe	Relatief laag risico. Consumentenveiligheid zie MVO verslag: Onze Omgeving.
102-12	Externe initiatieven	FSC®, Trees for All, Climate Neutral Group, ISO 9001 en ISO 14001, CO_2-Prestatieladder niveau 3, MVO-Prestatieladder niveau 4, ondertekening van het Grondstoffenakkoord, ondertekening en invulling TruStone-convenant., Carbon Farming.
102-13	Lidmaatschap van (branche-)verengingen of belangenorganisaties	Lid van InRetail, de grootste brancheorganisatie in retail non-food en CBM, brancheverenigingen voor de interieurbouw en meubelindustrie. Inkooporganisatie EIKOM (Duitsland). Actief lid bedrijfsbelangenvereniging Lage Meren-Meilust.

2	STRATEGIE	
102-14	Verklaring hoogste beslissingsbevoegde	Opgenomen in MVO verslag: MVO Beleid.
102-15	Beschrijving belangrijke gevolgen, risico's en mogelijkheden	Opgenomen in MVO verslag: MVO Beleid.

3	ETHIEK EN INTEGRITEIT	
102-16	Waarden, principes en standaarden en gedragsnormen	Interne Gedragscode medewerkers.
102-17	Mechanismen voor het rapporteren van problemen in onethisch/onwettelijk gedrag en advies in organisatorische integriteit	Interne en externe vertrouwenspersoon. Interne klachtenprocedure, klokkenluidersregeling en compliance code is in werking, ook voor leveranciers.

4	BESTUUR	
102-18	Bestuursstructuur	Organogram opvraagbaar.

keller

mvo.kellerkeukens.nl

5	STAKEHOLDER BETROKKENHEID	
102-40	Lijst van groepen belanghebbenden	Vastgesteld in MVO-werkgroep. Belangrijkste stakeholders: eigenaren, medewerkers, dealers, consumenten, B2B-klanten en leveranciers.
102-41	Collectieve arbeidsovereenkomsten	CAO van toepassing voor alle medewerkers.
102-42	Identificeren en selecteren van belanghebbenden	Op basis van relevantie en invloed
102-43	Benadering voor het betrekken van belanghebbenden	Klanttevredenheidsmetingen, Medewerkerstevredenheidsonderzoek, persoonlijk contact dealers en zakelijke klanten, uitvraag aanbestedingen.
102-44	Voornaamste onderwerpen en vraagstukken	Levertijd en kwaliteit, duurzaamheid (WoCo's), werkdruk en vitaliteit.

6	WIJZE VAN RAPPORTEREN	
102-45	Operationele structuur van de organisatie	Organogram
102-46	Omschrijven van de inhoud van het rapport en afbakening van de aspecten	n.v.t.
102-47	Lijst van materiele aspecten	De materiële aspecten zijn opgenomen in het online MVO verslag.
102-48	Herformuleren van eerder verstrekte informatie	n.v.t.
102-49	Veranderingen in verslaglegging	Geen
102-50	Rapportageperiode	2021, tenzij anders vermeld in verslag.
102-51	Datum van meest recente verslag	februari 2022
102-52	Verslagleggingscyclus	Continu, minimaal jaarlijks
102-53	Contactpunt voor vragen over het verslag of de inhoud ervan	Hoofdkantoor Bergen Op Zoom, Toine van Rooij (0164 - 285000)
102-54	Claims omtrent het rapporteren in overeenstemming met de GRI Standards	n.v.t.
102-55	GRI Inhoudsopgave	n.v.t.
102-56	Externe assurance	n.v.t.

GRI 103: MANAGEMENT APPROACH

1	ALGEMENE VEREISTEN VOOR HET RAPPORTEREN VAN DE MANAGEMENTBENADERING	
103-1	Toelichting op de materiële aspecten en de afbakening	Circulariteit van materialen en grondstoffen is een belangrijke ontwikkeling en wens van onze stakeholder. De circulaire keuken is hier een mooi voorbeeld van. Ook bij de ontwikkeling van onze keukens staat duurzaamheid voorop en zal deze zo hoogwaardig mogelijk zijn.
103-2	De managementbenadering en zijn componenten	Zie MVO verslag: MVO Beleid.
103-3	Evaluatie van de managementbenadering	Minstens jaarlijks in directievergadering en MVO werkgroep

GRI 200: ECONOMISCHE STANDAARDEN

201	ECONOMISCHE PRESTATIES	
201-1	Directe economische waarde gegenereerd en gedistribueerd	Jaarlijkse publicatie bij KVK
201-2	Financiële implicaties en andere risico's en mogelijkheden voor de activiteiten van de organisatie als gevolg van klimaatverandering	Kostprijsopdrijvend effect grondstoffen (hout, metalen, kunststoffen).
201-3	Dekking van de verplichtingen in verband met het vastgestelde uitkeringenplan van de organisatie	Bedrijfstak Pensioenfonds + excellent pensioenregeling. Aanvullende pensioen: Centraal Beheer.
201-4	Significante financiële steun van een overheid	Opleidingssubsidie Expertise Centrum Meubel, SDE op zonnepanelen.

202	MARKTAANWEZIGHEID	
202-1	De verhouding tussen het standaard aanvangssalaris en het lokale minimumloon, op geslacht	CAO +5%, vakvolwassen startsalaris voor 17-jarigen i.p.v. jeugdloon. Gelijke beloning man/vrouw.
202-2	Aandeel van het topkader dat afkomstig is uit de lokale gemeenschap	Geen specifiek beleid op lokaal werven. KM vergoeding tot 45 km enkele reis.

203	INDIRECTE ECONOMISCHE EFFECTEN	
203-1	Investeringen in infrastructuur en ondersteuning in diensten	Sponsoring Healthy Team, team Virtu/e (TU Eindhoven), Stichting De Hond Kan De Was Doen, Project Junior High School en diverse maatschappelijke initiatieven medewerkers en klanten.
203-2	Significante indirecte economische gevolgen	n.v.t.

204	INKOOPBELEID	
204-1	Deel van uitgaven betreffende lokaal gevestigde leveranciers	Geen beleid op lokaal inkopen. Lokale sociale werkplaats voorziet in groenonderhoud en vullen zakken keukenonderdelen.

205	ANTI-CORRUPTIE	
205-1	Activiteiten welke geanalyseerd zijn op corruptie gerelateerde risico's	Arbeidsovereenkomst bepalingen inzake aanname geschenken. Code of conduct gereed.
205-2	Communicatie en training in anticorruptiebeleid en procedures	Gedragscode en klokkenluidersregeling zijn actueel, integriteit is daar aan toegevoegd. Compliance training vind via e-learning plaats.
205-3	Maatregelen die zijn getroffen naar aanleiding van gevallen van corruptie	n.v.t.

206	CONCURRENTIEBELEMMEREND GEDRAG	
206-1	Rechtszaken vanwege concurrentiebelemmerend gedrag, anti-kartel- en monopolistische praktijken	n.v.t.

GRI 300: MILIEUSTANDAARDEN

300	MILIEUSTAANDAARDEN	
GRI 300	Milieu Standaarden	Keller Keukens is ISO 9001, ISO 14001, FSC®, CO_2-Prestatieladder niveau 3 en MVO Prestatieladder niveau 4 gecertificeerd en Milieukeur gecertificeerd.

301	MATERIALEN	
301-1	Totale hoeveelheid gebruikte materialen naar gewicht of volume	Inkoopaantallen per product inzichtelijk, nog geen analyses op gedaan.
301-2	Percentage van de gebruikte materialen dat bestaat uit afval uit externe bronnen	Nog niet in beeld. Greengridz bladen zijn volledig recyclebaar, spaanplaat bestaat voor > 60% uit gerecycled materiaal, plintklossen en plintpoten zijn gemaakt van gerecycled kunststof. Qua volume is dit meer dan 90% van het gewicht van een keukenopstelling
301-3	Percentage producten dat is verkocht en waarvan de verpakking is ingezameld, naar categorie	Afvalinzameling en afvoer is verantwoordelijkheid installateurs, zij krijgen een vergoeding hiervoor. Hier is geen controle op.

302	ENERGIE	
302-1	Energieverbruik binnen de organisatie (scope 1 &2)	CO_2-footprint opgenomen in MVO verslag op website Keller.
302-2	Energieverbruik buiten de organisatie (scope 3)	Ambitie om te stijgen op de CO_2-prestatieladder niveau 4.
302-3	Energie intensiteit	Per keukenkast
302-4	Energie die is bespaard door besparingen en efficiëntieverbeteringen	Zie MVO verslag op website Keller Keukens, daarnaast een dedicated transporteur die werkt met hubs om # gereden km's te verminderen
302-5	Reducties in energie-eisen/behoeften van producten en diensten	Alle verlichting in keukens is led. Apparatuur met energielabel A in assortiment.

303	WATER	
303-1	Totale wateronttrekking per bron	Marginaal voor zowel de winkels als de productie in Bergen op Zoom.
303-2	Waterbronnen waarvoor wateronttrekking significante gevolgen heeft	n.v.t.
303-3	Percentage en totaal volume van gerecycled en hergebruikt water	n.v.t

304	BIODIVERSITEIT	
304-1	Locatie en oppervlakte van land dat eigendom is, gehuurd wordt, beheerd wordt in of grenst aan beschermde gebieden en gebieden met een hoge biodiversiteitswaarde buiten beschermde gebieden	n.v.t.
304-2	Beschrijving van significante gevolgen van activiteiten, producten en diensten op de biodiversiteit in beschermde gebieden en gebieden met een hoge biodiversiteitswaarde buiten beschermde gebieden	Inkoop FSC® hout om gebieden te ontzien
304-3	Beschermde of herstelde habitats	Herstel en bescherming van Kibale National Park via Trees for All.
304-4	Aantal op de rode lijst van IUCN vermelde soorten en soorten op nationale beschermingslijsten met habitats in gebieden binnen de invloedssfeer van bedrijfsactiviteiten, ingedeeld naar hoogte van het risico van uitsterven	n.v.t.

305	EMISSIES	
305-1	Directe broeikasgas emissies (scope 1), naar gewicht	CO_2-footprint opgenomen in MVO verslag: Home en CO_2-Prestatieladder documentatie, beschikbaar op de MVO website,
305-2	Indirecte broeikasgas emissies uit energie (scope 2), naar gewicht	CO_2-footprint opgenomen in MVO verslag: Home
305-3	Andere relevante indirecte emissies van broeikasgassen (scope 3), naar gewicht	Nog niet onderzocht.
305-4	Broeikasgas emissie intensiteit	Per keukenkast
305-5	Initiatieven ter verlaging van de emissie van broeikasgassen en gerealiseerde verlaging	Duurzame Keukens en CO_2-Prestatieladder documentatie.
305-6	Emissie van ozonafbrekende stoffen, naar gewicht	n.v.t.
305-7	Nox, Sox en andere significante luchtemissies, naar type en gewicht	2016: Overgang naar watergedragen lakken ter vermindering VOS-uitstoot. Vanaf eind 2019 zijn ook de NCS-lakken op waterwaterbasis.

306	AFVALWATER EN AFVALSTOFFEN	
306-1	Totale waterafvoer naar kwaliteit en bestemming	Marginaal voor zowel de winkels als de productie in Bergen op Zoom.
306-2	Totaalgewicht afval naar type en verwijderingsmethode	Spaanplaat voor recycling 887360 kg Papier/Karton 348780 kg Restafval 227080 kg Verfhoudend afval 203366 kg Hout B 135100 kg Hout A 73860 kg Metaal 79280 kg Bedrijfsafval 47860 kg Bodemas 42840 kg Folie/kunststoffen 19870 kg Wit- en bruingoed 18020 kg Vliegas 13180 kg Bouw- en sloopafval 4620 kg PVC schoon 4600 kg Schroot 4355 kg Glasafval 1970 kg Archiefmateriaal 1545 kg Afgewerkte olie 880 kg Elektronisch afval 264 kg
306-3	Totaal aantal en volume van significante lozingen.	n.v.t.
306-4	Gewicht van getransporteerd, geïmporteerd, geëxporteerd of verwerkt afval dat als gevaarlijk geldt.	Verf afval 203366 kg
306-5	Benaming, grootte, beschermingsstatus en biodiversiteitswaarde van wateren en gerelateerde habitats die significante gevolgen ondervinden van de waterafvoer en afvloeiing.	n.v.t.

307	NALEVING MILIEU WET- EN REGELGEVING	
307-1	Het niet naleven van milieu wet- en regelgeving	n.v.t.

308	KETEN BEOORDELING OP MILIEU-ASPECTEN	
308-1	Percentage nieuwe leveranciers/onderdelen van de keten dat is beoordeeld aan de hand van milieucriteria	Hout wordt uit verantwoord beheerde bossen ingekocht. Leveranciers voor 90% uit West-Europa. Leveranciersbeoordeling op milieucriteria is aandachtspunt MVO Beleid, zie MVO verslag: MVO Beleid.
308-2	Significante actuele en potentiele negatieve milieu-impacts in de keten, en genomen maatregelen	Inkoop FSC® hout en retourstromen afvalhout naar leverancier om nieuw spaanplaat van te maken. De transporteur werkt met hubs om het # gereden km's te minimaliseren en is fors aan het investeren in elektrische voertuigen.

GRI 400: SOCIALE STANDAARDEN

401	WERKGELEGENHEID	
401-1	Nieuw personeel en personeelsverloop	In dienst 106, uit dienst 68 (totaal DKG Groep)
401-2	Uitkeringen aan voltijdmedewerkers die niet beschikbaar zijn voor deeltijdmedewerkers	n.v.t.
401-3	Ouderschapsverlof	22 medewerkers (totaal DKG Groep)

402	VERHOUDING TUSSEN WERKGEVER EN WERKNEMER	JAARLIJKSE WERKVERMOGENSMONITOR
402-1	Minimale opzegtermijn(en) in verband met operationele veranderingen, inclusief of dit wordt gespecificeerd in collectieve overeenkomsten	Conform Wet- en regelgeving en CAO

403	GEZONDHEID EN VEILIGHEID	
403-1	Percentage van het totale personeelsbestand dat is vertegenwoordigd in formele gezamenlijke arbo-commissies van werkgevers en werknemers	> 5%
403-2	Letsel-, beroepsziekte-, uitvaldagen- en verzuimcijfers en het aantal werk gerelateerde sterfgevallen, per regio en naar geslacht	Ziekteverzuim 2021: 4,79 vs 4,69% in 2020. Het welzijn van medewerkers is erg belangrijk voor ons, mede daardoor is een van doelen om met fysieke en sociale veiligheid aan de slag te gaan. De stijging van het ziekteverzuim is voornamelijk toe te schrijven aan COVID-19.
403-3	Werknemers met een hoog risico of verhoogd voorkomen van werk-gerelateerde ziekten	16%
403-4	Afspraken over arbo-onderwerpen vastgelegd in formele overeenkomsten met vakbonden	Formele arbo-commissie

404	OPLEIDING EN ONDERWIJS	
404-1	Gemiddeld aantal uren dat een werknemer per jaar besteedt aan opleidingen, onderverdeeld naar werknemerscategorie	Er zijn bijna 3400 e-learnings via de DKG Campus gestart in 2021, waarvan 68% afgerond is. 625 medewerkersmedewerkers (68%) startten een online training. Gemiddeld 5,4 online trainingen per medewerker, met een gemiddelde duur van 20min per training. Er zijn 1048 geregistreerde deelnemers geweest voor klassikale trainingen, gemiddeld 1,8 event per deelnemer.
404-2	Programma's voor competentiemanagement en levenslang leren die de blijvende inzetbaarheid van medewerkers garanderen en hen helpen bij het afronden van hun loopbaan	GROEI Performancemanagement. DKG Campus sinds einde Q2 2018 actief en het aantal mogelijkheden in opleidingen, TED-talks e.d. groeit per kwartaal.
404-3	Percentage medewerkers dat regelmatig wordt ingelicht omtrent prestatie- en loopbaanontwikkeling	Alle medewerkers

405	DIVERSITEIT EN GELIJKE KANSEN	
405-1	Samenstelling van bestuurslichamen en onderverdeling van medewerkers	In Raad van Commissarissen 3 dames, totaal aandeel vrouwen in de organisatie bedraagt > 30%
405-2	Verhouding tussen basissalarissen van mannen en vrouwen per medewerkerscategorie	Volgens loonschalen

406	VERBOD OP DISCRIMINATIE	
406-1	Totaal aantal gevallen van discriminatie en de getroffen maatregelen	Geen

407	VRIJHEID VAN VERENIGING EN COLLECTIEVE ARBEIDSONDERHANDELINGEN	
407-1	Activiteiten waarin is vastgesteld dat daarbij een aanzienlijk risico zou kunnen gelden voor het recht op de uitoefening van de vrijheid van vereniging en collectieve arbeidsonderhandelingen, alsmede de maatregelen die zijn getroffen ter ondersteuning van deze rechten	Geen

408	KINDERARBEID	
408-1	Activiteiten waarin is vastgesteld dat er een aanzienlijk risico is van gevallen van kinderarbeid, alsmede de maatregelen die zijn getroffen op de uitbanning van kinderarbeid	Geen risico's vastgesteld. Leveranciers buiten West-Europa worden in later stadium bekeken. Dit is een klein percentage. Alle (product)leveranciers hebben de gedragscode van DKG Groep ondertekend. Ook de diensten- en machine leveranciers krijgen het verzoek de gedragscode te ondertekenen.

409	GEDWONGEN OF VERPLICHTE ARBEID	
409-1	Activiteiten waarin is vastgesteld dat er een aanzienlijk risico is van gevallen van gedwongen of verplichte arbeid, alsmede de maatregelen die zijn getroffen gericht op de uitbanning van gedwongen of verplichte arbeid	Geen risico's vastgesteld. Leveranciers buiten West-Europa worden in later stadium bekeken. Dit is een klein percentage. Alle (product)leveranciers hebben de gedragscode van DKG Groep ondertekend. Ook de diensten- en machine leveranciers krijgen het verzoek de gedragscode te ondertekenen.

410	VEILIGHEIDSBELEID	
410-1	Percentage van het beveiligingspersoneel dat training heeft gevolgd in het beleid of de procedures van de organisatie betreffende aspecten van de mensenrechten die relevant zijn voor de activiteiten	n.v.t.

411	RECHTEN VAN INHEEMSE BEVOLKING	
411-1	Totaal aantal gevallen van overtreding van de rechten van de inheemse bevolking, alsmede de getroffen maatregelen	n.v.t.

412	BEOORDELING MENSENRECHTEN	
412-1	Totaal aantal en percentage van de activiteiten die onderhevig zijn geweest aan een beoordeling op mensenrechten, alsmede een effectbeoordeling	Geen
412-2	Totaal aantal uren personeelstraining over beleid en procedures betreffende aspecten van mensenrechten die relevant zijn voor de activiteiten	0
412-3	Percentage van en totaal aantal aanmerkelijke investeringsovereenkomsten waarin clausules over mensenrechten zijn opgenomen of waar de naleving van de mensenrechten is getoetst	0%

413	GEMEENSCHAP	
413-1	Aard, reikwijdte en effectiviteit van alle programma's en methoden die de effecten van de activiteiten op gemeenschappen bepalen en beheren, waaronder vestiging, activiteiten en vertrek	Zie MVO verslag: Onze Omgeving
413-2	Activiteiten met significante actuele of potentiële negatieve gevolgen voor lokale gemeenschappen	Geen

414	KETENBEOORDELING OP MENSENRECHTEN EN GEMEENSCHAP (SOCIALE CRITERIA)	
414-1	Percentage nieuwe leveranciers/onderdelen van de keten dat is beoordeeld aan de hand van criteria op het gebied van mensenrechten en gemeenschap	Hout wordt uit verantwoord beheerde bossen ingekocht. Leveranciers voor 90% uit West-Europa. Leveranciersbeoordeling op mensenrechten en gemeenschap is aandachtspunt MVO Beleid, zie MVO verslag: MVO Beleid.
414-2	Significante actuele en potentiele negatieve gevolgen in de keten aangaande mensenrechten en gemeenschap, en genomen maatregelen	Geen risico's vastgesteld. Leveranciers buiten West-Europa worden in later stadium bekeken. Dit is een klein percentage.

415	PUBLIEK BELEID	
415-1	Totale waarde van financiële en in-natura-bijdragen aan politieke partijen, politici en gerelateerde instellingen per land	Geen

416	GEZONDHEID EN VEILIGHEID VAN CONSUMENTEN	
416-1	Percentage van significante product- en diensten categorieën welke zijn beoordeeld voor gezondheids- en veiligheidsverbeteringen	Alle producten
416-2	Totaal aantal gevallen van niet-naleving van regelgeving en vrijwillige codes betreffende gevolgen voor gezondheid en veiligheid van producten en diensten gedurende de levensduur, naar type resultaat	Geen

417	MARKETING EN LABELLING/ETIKETTERING	
417-1	Type informatie over producten en diensten dat verplicht wordt gesteld door procedures en het percentage van belangrijke producten en diensten die onderhevig zijn aan dergelijke informatie-eisen	FSC® certificering, Milieukeur certificaat, CE-markeringen, ISO 9001 en ISO 14001.
417-2	Totaal aantal gevallen van niet-naleving van regelgeving en vrijwillige codes betreffende informatie over en etikettering van producten en diensten, naar type resultaat	Geen
417-3	Totaal aantal gevallen van niet-naleving van regelgeving en vrijwillige codes betreffende marketingcommunicatie, waaronder reclame, promotie en sponsoring, naar type resultaat	Geen

418	PRIVACY VAN KLANTEN	
418-1	Totaal aantal gegronde klachten over inbreuken op de privacy van klanten en het kwijtraken van klantgegevens	Geen

419	SOCIAAL-ECONOMISCHE NALEVING	
419-1	Monetaire waarde van significante boetes als gevolg van niet-naleving van wet- en regelgeving wat betreft de voorziening en het gebruik van producten en diensten	n.v.t.

FACTORY IN THE NETHERLANDS

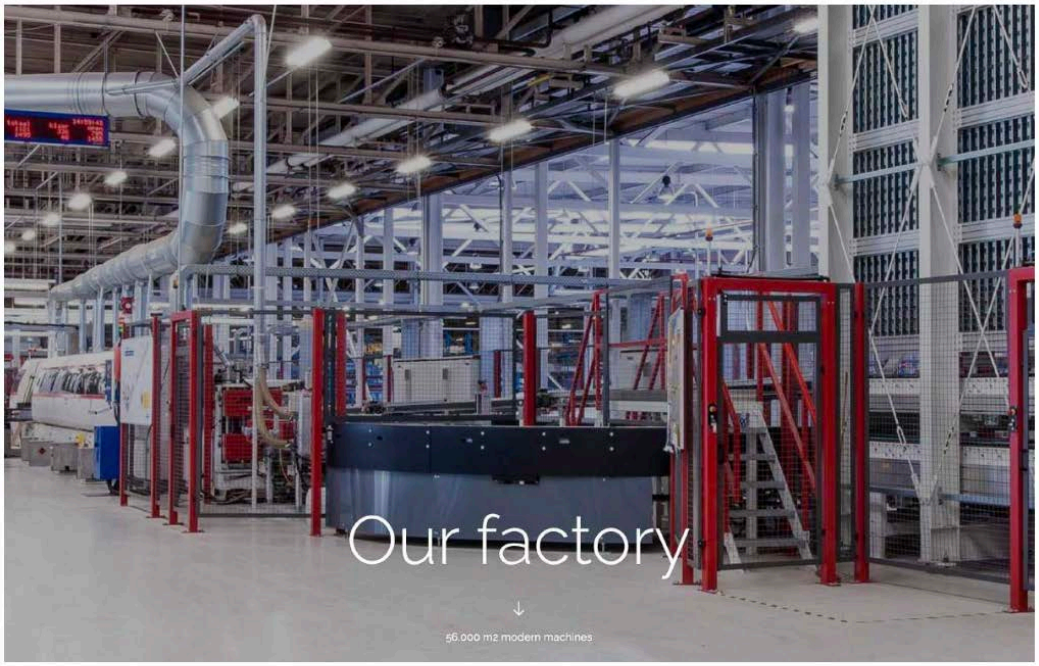

keller

Link to factory movie of Keller Kitchens in the Netherlands

Lacquer department

Recently, new climate units were installed in the lacquer department, with which humidity and temperature can be kept constant during all seasons of the year. This ensures a constant lacquer quality because the outdoor climate no longer influences the indoor climate. An additional advantage is that employees also work ergonomically because the temperature during summer remains lower than was the case until before.

Sanding and dust removal installation

The climate installation is the first of three major investments within the lacquer department that will be realised in the next few months. Further we work with a completely new sanding flutter machine and in the course of 2023 two one-surface dust removal installation for the flat spraying installation will be installed

Our distribution center

An important technique that we use in our factory is scanning. Every part of your kitchen gets a separate barcode. This is scanned at every station throughout the process. Only when all parts at the end of the line have been scanned will your kitchen go into the truck. So you can be sure that your beautiful kitchen is complete.

Every week, 250 trucks depart from our distribution center to our customers. To make this process efficient and to ensure that the parts end up in the right truck, we use an advanced sorting system. Only in this way can Keller Kitchens guarantee its short delivery times.

Keller has been making kitchens from its own factory for more than 85 years. Opting for a Keller kitchen is opting for Dutch craftmanship and quality. You can be sure of a product that is produced with care and attention for people and the environment.

Our production capacity

Due to its production area of 56,000 m2 and state of the art producion lines, our factory can produce huge numbers of kitchens. For example, weekly:

- ✓ 16.500 parts a week by the panel cutting saw;
- ✓ 9.300 units by the assembly line;
- ✓ 25.000 fronts pre-assembled;
- ✓ 2.500 kitchens produced.

Panel cutting installation and off-cut warehouse

In order to provide customers with a high quality product, only first-class materials and the latest technologies are used.

We use a state-of-the art sawing installation; an impressive line with a linked off-cut warehouse. Thanks to smart technology, single-piece parts can be produced with much less wastage. To further increase the capacity, two edge banding machines have been ordered (delivery 2023). This new installation is suitable for both small series and single pieces and can produce both laser edged and hot melt parts. The machine will be linked to the existing sawing installation.

Tall/special units line

The current production line for special units will be replaced by a new line that can produce more than double the current installation. Remarkable: the final assembly belt is built as ergonomically as possible, the tall units 'sink into the ground' so the top of the unit can be easily assembled. This line is also expected in 2023.

- **Blum hinges**
- **Blum lift up**
- **Blum drawers**
- **Different kind of lighting**
- **Cutleries**
- **All kind of fitting accessories**

ACCESSORIES

COUNTERTOPS

APPLIANCES

- Refrigerators
- Steam/Combi Ovens
- Cookers hoods
- Hobs
- Microwave
- Mixers
- Dishwashers
- Washing machine/Dryers
- Coffee machine
- Warming drawers
- Teppan yaki
- Wine coolers

WARDROBES

With a passion for custom interiors, we have honed our skills and expertise to become a specialist in wardrobe design and construction. We understand the importance of creating functional and aesthetically pleasing wardrobes that meet the unique needs of their clients. With a focus on sustainability, we use our knowledge in the field to create environmentally friendly wardrobes that are not only beautiful but also good for the planet. This commitment to sustainability sets the company apart and solidifies their position as frontrunners in the custom wardrobe industry.

The walk-in closet is a specially designed space designed for our clothes and accessories. It is the place where we can adequately store clothes, shoes, bags and every other little treasure of ours. But it is also the space to dream, to try out each and every dress, savouring every moment in your own personalised zone of luxury and absolute intimacy.

keller

LAUNDRY ROOM

COMPLETED PROJECTS

Golden Mile 3 | **Dubai**

PROJECT: GOLDEN MILE 3 | **LOCATION:** PALM JUMEIRAH, DUBAI | **CLIENT:** NAKHEEL PJSC
YEAR: 2017, QTY 500 KITCHENS | **MODEL:** HANDLELESS | **COLOR:** NCS LACQUER

Al Yasmeen | Sharjah

PROJECT: AL YASMEEN | **LOCATION:** SHARJAH, UAE | **CLIENT:** MAJID AL FUTTAIM & UNEC
YEAR: 2017, QTY 68 KITCHENS | **MODEL:** HANDLELESS | **COLOR:** NCS LACQUER

Medical Centre | Dubai

PROJECT: CITY WALK | **LOCATION:** DUBAI, UAE | **CLIENT:** MERAAS DEVELOPMENT/ASGC
YEAR: 2017, QTY 500 KITCHENS | **MODEL:** ELBA MELAMINE | **COLOR:** NCS LACQUER

Almafi Villas | Dubai

PROJECT: ALMAFI VILLAS | **LOCATION:** DUBAI, UAE | **CLIENT:** ENGINEERING OFFICE
YEAR: 2020 QTY 68 KITCHENS | **MODEL:** HANDLELESS | **COLOR:** WASHED OAK

Blue Waters | Dubai

PROJECT: BLUE WATERS | **LOCATION:** DUBAI, UAE | **CLIENT:** MERAAS DEVELOPMENT/ASGC
YEAR: 2017, QTY: 500 KITCHENS | **MODEL:** HANDLE LESS | **COLOR:** NCS LACQUER

City Walk | Dubai

PROJECT: CITY WALK | **LOCATION:** DUBAI, UAE | **CLIENT:** MERAAS DEVELOPMENT/ASGC
YEAR: 2017, QTY : 500 KITCHENS | **MODEL:** HANDLE LESS | **COLOR:** WHITE HIGH GLOSS SYNTHETIC

Jumeirah Gate | Dubai

PROJECT: BLUE WATERS | **LOCATION**: DUBAI, UAE | **CLIENT**: MERAAS DEVELOPMENT/ASGC
YEAR: 2017, QTY 500 KITCHENS | **MODEL**: HANDLE LESS | **COLOR**: NCS LACQUER

Nas Building | Dubai

PROJECT: NAS BUILDING | **LOCATION**: DUBAI, UAE | **CLIENT**:EWST | **YEAR**: 2019, QTY: 95
MODEL: HANDLE LESS | **COLOR**: MELAMINE LOAM & WALNUT

Safa Townhouses | Dubai

PROJECT NAME: DESIGN AND CONSTRUCTION OF TOWNHOUSES DEVELOPMENT AT AL SAFA FIRST
CLIENT: ENGINEERING OFFICE | **LOCATION**: DUBAI, UAE
YEAR: 2024, **QTY**: 30

Soho Properties | Dubai

PROJECT NAME: SOHO PROPERTIES | **CLIENT**: SOHO | **LOCATION**: DUBAI, UAE
YEAR: 2023, **QTY**: 187

Golf Grand | Dubai

PROJECT: GOLF GRAND COMMERCIAL/RESIDENTIAL BUILDING | **LOCATION**: DUBAI, UAE
CLIENT: EMAAR **YEAR**: 2025 | **QTY**: 323

Madinat Jumeirah Living Phase 4 | Dubai

PROJECT: MADINAT JUMEIRAH LIVING PHASE 4 AL JAZI RESIDENTIAL BUILDING | **LOCATION**: DUBAI, UAE
CLIENT: JUMEIRAH HILLS DEVELOPMENT | **YEAR**: 2025 | **QTY**: 378

Elvira | Dubai

PROJECT: ELVIRA RESIDENTIAL APARTMENTS | **LOCATION:** DUBAI, UAE | **CLIENT:** EMAAR

YEAR: 2025 | **QTY:** 892

Club Drive | Dubai

PROJECT: CLUB DRIVE RESIDENCES | **LOCATION:** DUBAI, UAE | **CLIENT:** JUMEIRAH HILLS DEVELOPMENT

YEAR: 2025 | **QTY:** 529

T.ONE
UNIVERSAL TRADING L.L.C

LIST OF COMPLETED MAJOR PROJECTS

Sl No.	Project Name	Client	Status	No. of Apartments/ Units
1	Bluewaters, Dubai	Meraas	Completed	96
2	Jumeirah Gate, Dubai	Meraas	Completed	975
3	City Walk, Dubai	Meraas	Completed	501
4	Al Yasmeen, Sharjah	Majid Al Futtaim	Completed	68
5	Medical Centre, Dubai	Meraas	Completed	71
6	NAS Building	Private	Completed	95
7	Saeed Bin Omar	Private	Completed	168
8	Almafi Villas	Engineering Office	Completed	400
9	Golden Mile 3	Nakheel	Completed	131
10	D469, Design and Construction of 30 Nos. Townhouses Development (B+G+1) at Al Safa First (Plot No. 3530400), Dubai, UAE	Engineering Office	Completed	30
11	JH-0022 Madinat Jumeirah Living (MJL) (Phase 4) Aljazi Residential Buildings	Jumeirah Hills Development	Completed	378
12	Golf Grand Project (B + G + P+15 Floors) Commercial/ Residential Building	EMAAR Development PJSC	Completed	323
13	Elvira Residential Apartments, Dubai Hills Estate Development(B+G+16F+R) Plot No. 63110897 in Dubai Hills, Dubai, UAE	EMAAR Development PJSC	Completed	592
14	DHE - Club Drive Residence - Main Contract Works on Plot No. 63111139	EMAAR Development PJSC	Completed	529

ONGOING PROJECTS

Farm Grove | Dubai

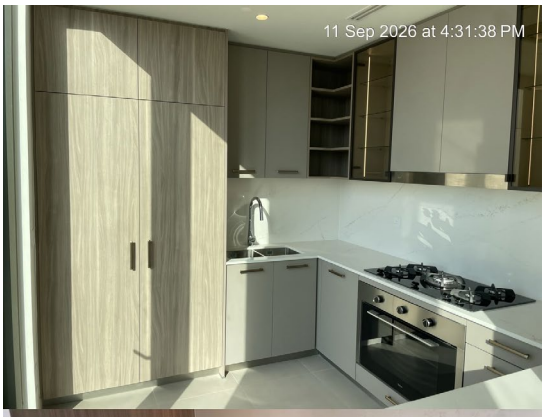

PROJECT: FARM GROVE | **LOCATION**: DUBAI, UAE | **CLIENT**: EMAAR

YEAR: 2026 | QTY: 482

Rose Hills | Dubai



PROJECT: ROSE HILLS MIDRISE BUILDING | **LOCATION**: DUBAI, UAE | **CLIENT**: EMAAR

YEAR: 2026 | QTY: 555

Avonlea & Bayline | Dubai

PROJECT: AVONLEA & BAYLINE | **LOCATION**: DUBAI, UAE | **CLIENT**: EMAAR

YEAR: 2026 | **QTY**: 312

T.ONE
UNIVERSAL TRADING L.L.C

LIST OF IN-PROGRESS PROJECTS

Sl No.	Project Name	Client	Status	No. of Apartments/ Unit	Main Contractor	Consultant
1	The Gramercy J128B Construction of 2B+G+1P+9+R Residential Building at Dubai Hills Estate, Dubai, UAE	Soho	In-Progress	70	New System Engineering LLC	National Engineering Bureau
2	Construction of G + 5 at Nad Al Sheba, Dubai, UAE	Crystal Six LLC	In-Progress	18	High Beam Contracting LLC	Al Fahidi Consulting Engineers
3	Construction of 7 Villas at Jumeirah-1 & 3, Dubai, UAE	Mr. Saleem Abdul Rahim Hassan Saadi Al Rais	In-Progress	14	Al Musallas Building Construction	Al Fahidi Consulting Engineers
4	Avonlea and Bayline Avonlea: G+9 Floors (Tower 1), G+7 Floors Tower 2 Bayline: G+1+P+8 Floors	EMAAR Development PJSC	In-Progress	312	Al Rakha General Contracting LLC	Mirage Leisure and Development
5	Rose Hill Midrise Building on Plot No. PA9B.008 (63111924)	EMAAR Development PJSC	In-Progress	555	Transemirates Contracting LLC	Al Wasl Al Jadeed Consultant
6	The Valley Development, Farm Grove, (G+2+R) + 1 No. Community Centre + 1 No. Guard House, Plot 9154406, Dubai, U.A.E.	EMAAR Development PJSC	In-Progress	482	Al Rakha General Contracting LLC	Mirage Leisure and Development
7	Ocean Views A1246 B+G+5 (Building A) + 6 (Building B) + R on Plot B7.01.08, Rashid Yacht & Marina Development, Dubai, UAE	EMAAR Group Mina Rashid Properties	In-Progress	78	Alserh Al Kabeer Construction LLC	Mirage Leisure and Development

T.ONE
UNIVERSAL TRADING L.L.C

LOCATION:

PO Box 393014
Showroom 1, MSM 2 Building, Exit 44,
Sheikh Zayed Road, Dubai, UAE

CONTACT:

+971 4 238 6488

reception@t1-studio.com

info@t1-studio.com

WEBSITE DETAILS:

t1-studio.com

T.ONE

For more information

Showroom 1, MSM 2 Building,
Exit 44, Sheikh Zayed road, Dubai,
UAE

+971 4 238 6488

reception@t1-studio.com
info@t1-studio.com

t1studiomena

T.One Universal Studio

t1-studio.com

T.ONE
UNIVERSAL TRADING L.L.C

02

PROJECT QUALITY PLAN

T.ONE
UNIVERSAL TRADING L.L.C

Quality Policy & Manual

T. ONE UNIVERSAL TRADING LLC

DUBAI, UAE

QUALITY MANAGEMENT SYSTEM MANUAL

ISO 9001:2015

PREPARED BY:	REVIEWED & APPROVED BY:
QA/QC MANAGER	GENERAL MANAGER
DATE: 21-02-2023	DATE: 21-02-2023

TABLE OF CONTENTS

SEC	SUB SEC	DESCRIPTION	PAGE
1		**INTRODUCTION**	04
2		**COMPANY PROFILE AND HISTORY**	04
	2.1	Company Details	05
3		**DEFINITIONS OF TERMS RELATED TO QUALITY**	05
4		**CONTEXT OF THE ORGANIZATION**	09
	4.1	Understanding the Organization and its Context	09
	4.2	Understanding the needs and Expectations of Interested Parties	10
	4.3	Scope Of Quality Management System	10
	4.4	Quality Management System and its process	10
5		**LEADERSHIP AND COMMITMENT**	11
	5.1	Leadership And Commitment	11
	5.2	Quality Policy	11
	5.3	Organization Roles	12
	5.4	Responsibility and Authority	12
6		**QUALITY SYSTEM PLANNING & OBJECTIVES**	13
	6.1	Actions to address risks and opportunities	13
	6.2	Quality Planning	14
7		**SUPPORT**	14
	7.1	Resources & Infrastructure	14
	7.2	Monitoring And Measuring resources	14
	7.3	Verification Resources And Personnel	15
	7.4	Competency & Training	15
	7.5	Internal Communication	16
	7.6	Estimating/Contract Review	16
	7.7	Documentation and Information	17
	7.7.2	Document Numbering System	18
	7.7.3	Correspondence Numbering and Transmittals	18
	7.7.4	Control of Quality Documentation	19
8		**OPERATIONS**	20
	8.1	Operational Planning and control	20
	8.2	Requirements for Products and service	21
	8.2.1	Customer Communication	21
	8.2.2	Customer properties:	21
	8.2.3	Determining the requirements for products and services	21
	8.2.4	Review of the Requirements for Products and Services	22
	8.2.5	Changes to Requirements for products and Services	22

	8.3	Design Control	23
	8.4	Control of Service Provision	23
	8.5	Purchasing –Procurement Organization	24
	8.5.1	Procurement of Subcontractors	24
	8.5.2	Control of Subcontractors	25
	8.5.3	Vendor / Supplier Evaluation:	26
	8.6	Product Identification, Traceability And Control	26
	8.7	Preservation	26
	8.8	Customer/client Supplied Product	26
	8.9	Post-delivery Activities	27
	8.10	Release of products and services	28
	8.10.1	Snagging and Handover	28
	8.10.2	Receiving Inspection And Testing	29
	8.10.3	In Process Inspection And Testing	29
	8.10.4	Final Inspection And Testing	30
	8.10.5	Inspection And TestStatus	30
	8.10.6	General Requirements Of Testing And Sampling	31
	8.10.7	Control Of Inspection	32
	8.11	Control Of Non-Conforming Products	32
09		**PERFORMANCE EVALUATION**	33
	9.1	Customer Satisfaction	33
	9.2	Internal Quality Audits	33
	9.3	Analysis Of Data	34
	9.4	Management Responsibility	35
	9.4.1	Managing Systems And Procedures	35
	9.4.2	Management Review inputs and outputs	35
	9.4.3	Request for Change / Change Management	36
10		**IMPROVEMENT**	36
	10.1	Continual Improvement	36
	10.2	Non-Conformance	37
	10.3	Corrective And Preventive Action	37

Appendix A	**Trade License**
Appendix B	**Organization Chart**
Appendix C	**Definition Of Terms & Abbreviations**
Appendix D	**Project Organization, Roles & Responsibilities**
Appendix E	**Internal Audit Programme**
Appendix F	**Standards, Code, Specification**
Appendix G	**Project Directory**

1. INTRODUCTION

This Quality Management System manual is a statement of organization, responsibility, processes, authority and control which has been implemented and maintained by **T.one Universal trading LLC** so as to conform to the requirements of International Standard of ISO 9001:2015.

The requirements of this Quality Management System manual extend to all personnel at all departments who have been given the responsibility to implement and maintain the processes detailed in this Manual.

The contents of this Quality Management System manual are authorized and approved by the General Manager of the company.

The adoption of this Quality Management System is a strategy decision taken by the organization and it is widely influenced by:

1. Organizational Environment, in terms of process, technology, people, culture and the risk associated within.
2. Related objectives and process parameters which needs to be evaluated for performance improvement.
3. The provision of products and services that meet with the exact requirement of the customers.
4. Organizational capability enhancement to meet with changing requirements
5. The size, structure and scope of the work, which required to be controlled
6. Prompt process review, a result oriented business approach

Information presented in this manual is for use of **T.One Universal trading LLC** employees only. Unauthorized copying, distribution and use are strictly prohibited.

2. COMPANY PROFILE AND HISTORY

T.One Universal trading LLC is one of Dubai's leading kitchen and wardrobe specialists with full home solutions including vanities, laundry, appliances, worktops, sinks/taps & mixers. Since 2011, we've been dedicated to designing and engineering high-quality kitchens at an affordable price.

Our team of experienced designers and craftsmen will work closely with you to create a kitchen or wardrobe that perfectly fits your lifestyle and budget. We also take pride in our exceptional customer service, providing prompt and reliable support throughout the entire process, from the initial consultation to after-sales service.

A visit to our experience centre at Sheikh Zayed Road would acquaint you with our wide range of styles and designs that are perfect for your personality and space. Visit our kitchen showroom for a free kitchen design in 15 minutes.

T. One supplies premium and customizable kitchens, vanities, wardrobes, furniture, home appliances, sinks & taps and worktops in the UAE and the MENA region.

Together with our Clients, we deliver landmark projects – the modern marvels of the world – that foster sustainable progress and grow economies.

T. One has the resources and reach to provide our customers confidence in delivery.

The company is known for its immaculate service and customer focused business processes with the support of quality management systems

T.One Universal trading LLC with its management has experience in completing numerous projects in the Middle East in the following areas:

- KITCHENS & VANITIES
- WARDROBES & FURNITURE
- HOME APPLIANCES
- SINKS & TAPS
- WORKTOPS

Our strength is our ability to obtain Client's satisfaction through engineering and cost-effective solutions, and deliver high quality projects.

2.1 COMPANY DETAILS

NAME	:	**T.ONE UNIVERSAL TRADING LLC**
ADDRESS	:	**MSM 2 BUILDING, EXIT - 44 SHEIKH ZAYED RD – DUBAI - UAE , P O 391516**
TELEPHONE	:	**+971 42386488**
FAX	:	**+971 44511381**
EMAIL	:	**reception@t1-studio.com**
WEBSITE	:	**www.t1-studio.com**

3. DEFINITIONS OF TERMS RELATED TO QUALITY

QUALITY

The totality of features and characteristics of a product or service that bear on its ability to satisfy stated or implied needs.

QUALITY POLICY

Quality policy is overall quality intentions and direction of an organization as regards Quality as formally expressed by Executive Management. T.One Quality policy attached with this document.

QUALITY SYSTEM

This refers to the organizational structure, responsibilities, procedures, processes and resources for implementing Quality Management.

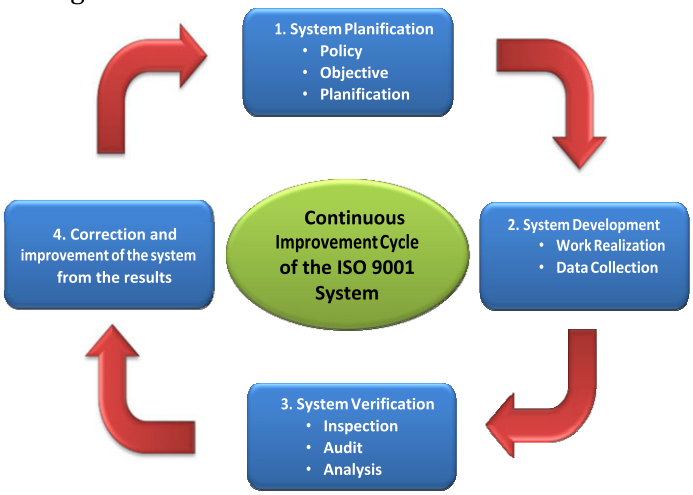

QUALITY ASSURANCE

Quality Assurance is a planning and organizing of a system or program to maintain a required level of quality and reliability. This includes auditing the system's operation and related controls to assure that they are being executed properly and functioning as expected. Quality shall be assured by Contractor/Engineer.

QUALITY CONTROL

Quality Control is a part of Quality Assurance, implements the latter by examining physical characteristics and comparing them to established and acceptable Quality Documents as stated in the quality assurance program or plan.

In the case of subcontractor(s), operational quality shall be controlled by Sub-Contractor in accordance with the subcontract agreement and quality documents. Quality control by the contractor will be ensured through quality site walks, surveillance inspection and adhere to pre=specified activities inspection plan

QUALITY MANUAL

Quality manual is a document, setting out the general quality policies and procedures of an organization. It is the governing document of the company Quality system, fully in accordance with the requirements of the ISO 9001: 2015 standard and contains the Company Quality Policy statement.

PROJECT QUALITY PLAN (PQP)

A live document setting out the specific quality practices, resources and sequence of activities relevant to a particular contract or project.

INSPECTION AND TEST PLAN

Inspection & test plan means the document which contains sequence of activities in a process, highlights the applicable Quality Documents, and inspection criticalities.

INSPECTION AND TESTING AGENCY

Inspection & testing agency approved by the Engineer to carry out the tests in the project.

QUALITY DOCUMENTS

Quality document means contract drawings, shop drawings, contract specifications, procedure, record formats, test reports, traceability procedures, codes and standards specified in the contract documents.

PREVENTIVE ACTION REQUEST

Preventive action request means the document issued by QA/QC Department to eliminate the causes of a potential nonconformity or other potentially undesirable situation.

CORRECTIVE ACTION REQUEST

Corrective action request means the document issued by QA/QC Department to eliminate the causes of a detected non-conformity or other undesirable situation.

NON-CONFORMANCE

Material and product or work/processes that do not meet the requirements of the relevant specifications, contract. Any deviation from work standards, practices, Procedures, to be removed as this for Non-compliance, management system, Performance etc. could either lead directly or indirectly to Product defects, Injury, illness, property damage, and damage to Work place environments, environmental pollution or a combination of these.

CONTINUAL IMPROVEMENT

Recurring activity to increase the ability to fulfil requirements of Customer– Owner/Employer, Engineer, Authorities, Buyers, End Users and Public.

PROJECT SPECIFIC QUALITY PROCEDURE

This procedure describes how particular specification requirements and special client needs are addressed in order to tailor the company quality system to suit with an individual project.

This procedure describes how particular specification requirements and special client needs are addressed in order to tailor the company quality system to suit with an individual project.

ACTIVITY SPECIFIC QUALITY PROCEDURE

This procedure describes how inspection and testing program and other features, which affect the quality of particular activity are addressed.

SITE

Site means the place, designated by Employer for further development under this project scope, where the construction activities shall be carried out by T.ONE & its Sub-contractors.

AUDIT

Independent review by T.ONE Engineer, Employer assigned auditors to assess the adequacy and compliance to

a) Project Quality Plan

b) Project Specification and contract documents, Compliance with and adherence to

c) QHSE Manual and procedures

d) Effectiveness of QHSE Management System Implementation) Statutory requirements.

AUDITOR(s)

The individual/Team that carries out the audit appointed by the auditing Organization or team to perform part or all of an audit.

AUDITEE(s)

Organization, Department, Section, facilities or individual to be audited

FIRST PARTY/INTERNAL AUDIT

Audit conducted within the organization to projects, Departments and facilities

SECOND PARTY AUDIT

Audit conducted in other organizations that are suppliers/subcontractors to the company

THIRD PARTY AUDIT

Audit inspection Activities carried out by the Employer/Engineer or any other third party to determine conformity including observing, measuring, examining and testing or gauging one or more characteristics of a product, process or service. Then, these are compared with pre-determined specified requirements to determine whether they are met.

TESTING

Determining an items capability to meet or exceed the specified requirements by subjecting them to a set of physical, chemical or environmental conditions or to functional operation

PROCESS

Set of inter related or interacting activities which transforms inputs into outputs (Inputs to a process are generally outputs of other processes).

PRODUCT

Unique process, consisting of a set of coordinated and controlled activities with start and finish dates, under taken to achieve an objective conforming to specific requirements including results of a set of inter related or Interacting activities that transforms.

DEFINITION OF TERMS AND ABBREVIATIONS

For project related Definition of Terms and Abbreviation refer Appendix D

4. CONTEXT OF THE ORGANIZATION

4.1 Understanding the Organization and its Contexts

In order to determine the external and internal issues relevant to the organization SWOT analysis tool is being used. The identified external and internal issues are monitored and reviewed with the help of Risk/opportunities Register and results are reviewed during the management review meetings.

While addressing external issues, emphasize will be made on legal, technological, competitive market, cultural, social and economic development in the area to which the company operates. Internal issues arise due to changes in values, culture, knowledge and performance of the organization due to changes will be addressed.

Company has developed documented information to support the operation of its process through comprehensive risk and opportunities register to effectively control business risk.

Any opportunities identified during SWOT have been taken for action and its impact to realize the objective is also evaluated. Top management will conduct Management Review meeting on a Quarterly basis. The purpose of the review is to ensure that the QMS is suitable, adequate, and effective.

The review will include the assessment of opportunities for improving the QMS, and identify any risk that affect the organizations ability to achieve the intended results of the QMS, and the need for changes to the QMS. These changes may include changes to the Quality Policy and Quality Objectives.

SWOT Analysis of the organization has been performed to understand the area which the organization needs to stress upon.

4.2 Understanding the needs and Expectations of Interested Parties

The interested parties identified by T.ONE are determined during Management Review. The requirements of these parties and the affect they have on our abilities to achieve customer/client satisfaction, long term growth and profit, is reviewed by T.ONE Top management.

4.3 Determining the Scope of Quality Management System

- T.ONE Management system procedures include, record control, Material inspection and test plans etc.
- Additional procedures required for the project includes corrective and preventive actions, PQP preparation procedure etc.
- Organization chart and roles and responsibilities of various professional involved in the project.
- Identifying and solving external and internal issues, closing out of consultant raised Issues as per standards and consultant requirement.
- Liaising with all local authorities for pre-approval and post approval of work activities including permit and noc works.
- Method statements for various activities involved in the project.
- Inspection and Test Plans for various activities and materials to be used in the project.
- Sub-contractor assessment procedure.
- Various form and format to be used in the lab and site for maintaining the QA/QC system.
- QA/QC procedures of each activity before, during and after the construction.

4.4 Quality Management System and its process

The Quality policies of this QMS provide a formal documented statement regarding the performance of planned activities. These activities are established in documented procedures and work instructions to provide evidence that relevant requirements of applicable codes, standards, contracts, drawings and the project Quality Objectives are achieved.

The contractor shall take the following actions which are required to implement the QMS requirements.

1. Developing additional documented procedures where required for the accomplishment of Quality Objectives.
2. Provide an adequate staff of qualified personnel to accomplish quality objectives.
3. Establishing controlled conditions that are required to achieve and verify quality objectives.
4. Providing documented indoctrination and training of personnel in the requirements of the Quality Policies and company procedures and standards.

5. Providing verification of Quality activities by reviews, checks, surveillance inspections or tests.
6. Conducting audits of relevant project activities and documentation to determine the adequacy of QMS implementation.
7. Providing for the preparation, identification and retention of Quality records that demonstrate the achievement of Quality objectives and the adequate functioning of QMS.
8. Providing for the regular review of all Quality related procedures and standards.

5. LEADERSHIP AND COMMITMENT

5.1 Leadership and Commitment

T.ONE is committed to meeting Customer/client requirements, needs and expectations on a continual basis. Continual improvement to the quality policy, objectives, procedures, documentation, and promoting the use of a process approach and risk-based thinking will be a top priority of both our Management Team and our Associates.

- The top management of T.ONE has demonstrated its leadership and commitment with respect to QMS in the following basis.
- The top management takes the accountability for the effectiveness of the QMS.
- Quality Policy and Quality Objectives have been established and are compatible with the context and strategic direction of the organization.
- The requirements of the QMS have been integrated with the organization's business processes with the help of procedures.
- Process approach and risk based thinking has been promoted through critical decision making review meetings to understand processes and associated risk.
- The resources needed for the quality management system are reviewed in the management review meetings and appropriate decisions are taken based on the requirements
- The importance of effective QMS and conformance to the QMS requirements are communicated during the internal audits or QMS awareness trainings to the interested parties.
- Management ensures engaging, directing and supporting persons to contribute the effectiveness of the quality management system through trainings, rewards and recognition.
- Management supports other relevant management roles to demonstrate their leadership by proper empowerment and authorities for their areas of responsibilities.
- Continual improvement to the quality policy, objectives, procedures, documentation, and promoting the use of a process approach and risk-based thinking will be a top priority of both our Management Team and our Associates.

5.2 Quality Policy

The company's Quality Policy has been defined and signed by the Chief Executive Officer.. The contents of the Quality Policy are disseminated throughout the company. Copies of the Quality Policy are also issued to staff to facilitate better understanding of its contents. Briefing on the Quality Policy,

Objectives and the requirements of the company's Quality system is included in induction training for all new staff.

5.3 Organizational Roles

The responsibility, authority and interrelation of T.ONE Associates who manage, perform and verify work affecting quality are clearly defined in the following documents:

- Job Descriptions are documented for each respective designation;
- Written documents that define the process and the person responsible for performing and verifying the work as applicable;
- Roles communicated by the company organizational chart

5.4 Responsibility and Authority

The responsibility, authority and the interrelation of all personnel who manage, perform, and verify work-affecting quality and/or having responsibility in implementing the processes have been defined and documented in attachment of this document.

Responsibilities and authorities for relevant roles are assigned by the Top Management and communicated within T.ONE to:

- Ensure that the QMS conforms to ISO 9001:2015;
- Report on the operation of the QMS and any opportunities;
- Ensure that continuous improvement is taking place;
- Ensure that customer focus is promoted throughout the organization;
- Ensure the integrity of the QMS is maintained during changes;
- Ensure that responsibilities and authorities related to the QMS are communicated and understood.

Top Management is ultimately responsible for the quality of T.ONE's products and services since they control the resources, systems and processes by which quality products are produced.

Top Management is authorized and responsible for business planning, development and the communication of our policies, QMS, establishment and deployment of quality objectives, the provision of resources needed to implement and improve the QMS and attending management reviews.
All managers demonstrate their commitment to the development and improvement of the QMS through the provision of necessary resources, through their involvement in the internal audit process and through their proactive involvement in continual improvement activities. Emphasis is placed on improving both the effectiveness and efficiency of key system processes.

All managers are authorized and responsible for the execution of the business plan and the implementation of the policies, processes, and systems described in this manual.

All managers are responsible for planning and controlling the management system processes within their area of responsibility, including the establishment and deployment of operational level objectives needed to implement and improve these processes.

All employees are responsible for the quality of their work and implementation of the policies and procedures applicable to the processes they perform.

Employees are motivated and empowered to identify and report any known or potential problems and to recommend related solutions to aid the corrective action process.

Employees are required to perform training for their job function. Employees are required to focus on customer satisfaction.

The Management Representative (QA/QC Manager) is responsible for ensuring that processes needed for the QMS are maintained, performance and required improvement of the QMS are reported into the Top Management, and to promote awareness of customer requirements throughout the organization. The Management Representative is authorized to perform a review of the QMS with the Top Management

Human resources manager along with functional managers review the roles and responsibilities of various resources after induction, but during the time of probation. Comprehensive Job Description (JD) provided to the individual's to ensure the human resources understand expected job responsibilities and authorities. These JDs are duly signed by the respective resources and a copy is provided to them for referral

6. QUALITY SYSTEM PLANNING & OBJECTIVES

T.ONE. has established, documented and implemented a quality system that satisfies the requirements of ISO 9001:2015

The scope of the quality system covers; the organization, responsibilities and authorities, procedures, work methods, and resources, with a view to achieving and maintaining a quality of service commensurate with the quality policy and objectives of the company and the client expectations.

6.1 Actions to address risks and opportunities

T.ONE has developed a comprehensive risk and opportunities register to identify and control the risk and opportunities. While reviewing the risk register, the organization should ensure QMS can achieve its indented results, enhance desirable effects through opportunities, reduce and prevent undesired effects through action plans.

T.ONE reviews the risk and opportunities register in the Management Review meetings to evaluate the effectiveness of the actions taken on the identified risks. Action taken to address the risk and opportunities shall be proportionate to the potential impact on the conformity of product and services. If the identified risks/opportunities suggest for any changes in the QMS the augmentation in the process can be made accordingly.

6.2 Quality Planning

The Company carries out quality planning and will follow the client and consultant requirement as per project specification.

General quality planning is carried out as part of corporate planning. The Corporate Planning activities revolves around setting up measurable objectives for relevant function and level within the company, identification of new markets, market research, investments and new development projects etc and identifying the means to be customer/client focused.

The company also carries out project related planning which revolves around the; provision of adequately trained personnel, compatibility of entities and documentation, necessary tools and equipment including test & inspection equipment, special process requirements, material and sub-contract procurement, project management, provision of documentation and, required quality records.

7. SUPPORT

7.1 Resources & Infrastructure

T.ONE Company management has identified and established resources required for satisfying the requirements of its customers, both regarding equipment and competent personnel.

The General Manager, Department heads, Project Managers, Project leaders, Engineers and Supervisors are responsible for ensuring that competent personnel are assigned to manage, perform and verify work affecting quality of product supplied to customers.

The company has trained personnel who carry out internal quality audits.

Adequacy of resources, including trained personnel, equipment, machines and software, with regard to meeting the customers' quality requirements, are reviewed periodically during Management Review meetings and necessary action taken accordingly.

7.2 Monitoring And Measuring resources

- T.ONE shall ascertain that all the inspections, testing and measuring equipment's are calibrated to relevant specifications and statuary requirements prior to use. This shall apply on all whether

owned by T.ONE, supplier loan or provided by the purchaser to demonstrate conformance of products to the specified requirements.

- All equipment's used at site shall be calibrated periodically; the valid Calibration certificates shall be submitted to consultant for inspection and verification prior to start the work.
- T.ONE QA/QC team will maintain an updated calibration records for inspection, measuring and test equipment.
- T.ONE shall maintain an updated master log of all calibrated equipment showing the equipment details, frequency of calibration; last date calibrated, and reference standard and location.
- T.ONE shall assign an identification number and the name of the agency that performed calibration and shall assign shall be a made available with the QA/QC department for verifications.
- T.ONE's QA/QC team will ensure all instruments and test equipment's that it is acceptable of the accuracy and precision necessary or as specified in the contract's documents.
- T.ONE's QA/QC team ensures that the handling, preservation and storage of inspection measuring, and test equipment are such that the accuracy and fitness for use is material.

7.3 Verification Resources And Personnel

The verification of quality on the Project is a shared responsibility between the Projects Manager and the individual organizational elements under the Quality Engineer. Quality control functions may be performed by the Quality Engineer or by the organizational element that carried out the assigned task.

Trained and qualified personnel independent of those directly responsible for the work being verified perform verification activities. As appropriate to the assigned task, personnel verifying quality have the authority and organizational freedom to:

(1) Initiate action to prevent the occurrence of a nonconformance.
(2) Identify and record any quality problems.
(3) Initiate, recommend, or provide solutions through designated channels.
(4) Verify correction of the quality problem.
(5) Control further processing, delivery, or installation of nonconforming product until the deficiency or unsatisfactory condition has been corrected.

7.4 Competency & Training

The Company attaches great importance to ensuring that all personnel performing activities affecting quality have adequate experience, skills and qualifications.

A quality systems training program should facilitate the achievement of an organization's mission,

goals, and objectives. Once the details of the quality systems training program are established, they are documented in a training plan. To be properly aligned with the organization, the training program should be developed with accurate information, stakeholder participation, and attention to the unique needs and constraints of the organization. This is achieved through the recruitment of suitably qualified personnel and the provision of adequate training. Job descriptions in the company are documented along with competence requirements and relevant information communicated.

Procedures require all new personnel to undergo induction training in Quality Assurance and Safety.The procedure also requires that the training needs of senior personnel be reviewed at least once every year. Where training requirements are identified, a plan for further training is established. The procedure assigns responsibility for the provision of any such further training and evaluates the effectiveness of training provided.

Based on the skill level of workers, on the Job trainings shall be provided at site. Appropriate personnel qualification, experience, skills matrix and training records are maintained.

7.5 Internal Communication

The company has defined and implemented processes for communication of quality requirements, objectives and accomplishments.

The management provides this information as it is identified as a resource for improvement and the involvement of employees in achieving the individual objective (s) and the permanent objective of the company of continuous improvement including customer/client , statutory, and regulatory requirements where applicable.

The tools used by the company include team briefings/other meetings, notice boards, in-house magazines etc. as required.

The project progress requirements will be communicated through Weekly progress reports and the review of the project progress will be recorded during every review meetings and subsequently minutes will be distributed among the participant for the action plan.

All variation jobs demanded by the client / consultant will be routed through the concerned commercial team (Business Development manager / Quantity Surveyor) for the job variation to offer. The commercial team holds the responsibility of getting the variation negotiated and approved based on the values and quantities specified and agreed by the client

7.6 Estimating/Contract Review

The Company has established procedures, which require that inquiries/tenders, quotations/proposals, confirmed orders/contracts are reviewed to ascertain that client requirements are adequately defined and are well understood, and to verify that the company has the capability to meet the stipulated or implied contract requirements and any other requirements

set by the company.

Contract documents are reviewed at tender stage. Drawings issued during the course of the works are reviewed when received. Inadequate or conflicting information is identified and Form E6 "Request for Information" is used to rise with the Consultant and to record answers received.Records of contract review are maintained.

Where the need arises for amendment to a contract, such an amendment is documented and respective information passed to all concerned in the company.

7.7 Documentation and Information

7.7.1 General

Documentation hierarchy for QMS is summarized in Figure 1-**Structure of Quality management system.**

Documents which are referred in the T.ONE Quality Manual has the system level procedures and its interaction with function level procedures and job related instructions and records applicable only to the extent specified therein and the same is framed in Level 2 and 3.(refer the structure diagram).

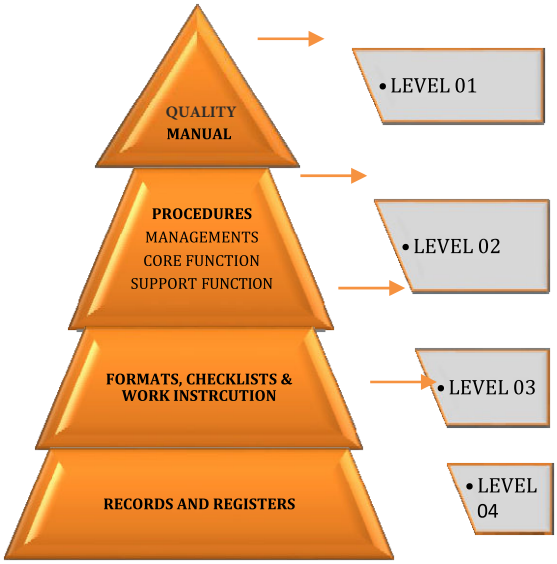

The Management representative who has been assigned / appointed to verify the activities governed by the quality management system and ensures that they are Coatings implemented as per the requirements. Wherever it is felt necessary to have documented procedures and its records other than the essential procedures appeared as"documented procedure" in International Standard ISO 9001:2015, MR ensures that they are documented, recorded and maintained accordingly.

The Documentation maintained by T.ONE includes the following:

- Quality Manual
- Documented statement of a quality policy
- Documented procedure and records required by ISO 9001:2015 Standard.
- Documented procedure to support the functions and processes including records needed by the organization to ensure the effective planning, operation and its control.
- Records and Registers (wherever applicable)
- Work instructions and method statements

Timely updating Master list of documents is the responsibility of MR.

7.7.2 Document Numbering System

ENGINEER approved numbering system will be used. Document format and numbering system will be complied with.

All project documents have been categorized with abbreviations as described in PROXX –T.ONE-XXX-00XX

Status of submission and approval will be updated every time a submission is made and ENGINEER comments are received

A monthly status report on submissions / approvals will be issued by the Document Controller. Follow up on submissions will be done by Project Manager.

7.7.3 Correspondence Numbering and Transmittals

The letters and fax numbering system will be as per PR0XX-T.ONE-XXX-00X.REV.00. The Document Controller is responsible for control of all documents and informing all affected departments / personnel.

Incoming / Outgoing Mail

All incoming mail/correspondence are stamped to indicate date of receipt. The Project Manager or delegated person then reviews and indicates further distribution (to HO and relevant subcontractors) and action by others.

Shop Drawings

Shop drawing numbering system will be in accordance PR0XX--T.ONE-XXX-00X.REV.00. All drawings are uniquely numbered with indication of latest revisions as per the agreed drawing numbering system. ENGINEER / EMPLOYER requirements on Engineering Document Numbering will be complied with.

Wherever practical, the changes themselves are indicated by clouding and placing the revision number in a triangle beside the cloud. Shop drawing submittal and approval status is tracked using the Shop Drawing Submittal and Approval Log.

'As Built' Drawings

As built mark ups are continuously marked during execution by the Surveyor / Site Engineer. After incorporation of these as built mark ups in the drawings, the 'AS BUILT' drawings are submitted for approval from ENGINEER. Comments by ENGINEER will be further incorporated until the As Built Drawings are approved. Submission requirements for As Built Drawings as indicated in the contract will be followed.

7.7.4 Control of Quality Documentation

The objective of document & data control is to ensure that valid issues of documents related to the project are available and used in the execution of the work and that obsolete documents are promptly removed from all points of use. Distribution is controlled and is done as per the document distribution matrix.

The Company has established a procedure for maintenance and control of necessary records in order to demonstrate that requirements for quality have been met and that the quality system is working effectively.

Records which provide objective evidence of the quality of work achieved are stored securely on site until the end of the Project. The records as indicated will be forwarded to the Client/Consultant.

The periods for maintenance of quality records including those maintained in electronic media are detailed in procedures and any contractual requirements for such are identified. Procedures also ensure that records are suitably identified, legible, retrievable and define where and who maintains the records.

The procedures also define the methods for disposition of quality records after prescribed retention periods are carried out. Confidentiality is observed in all cases.

The Customer is afforded access to quality records pertaining to the contract if agreed.Copies of the following documents are held at site office.

- Conditions of Contract & Contract Specifications
- Bill of Quantities
- Contract Drawings/As Built Drawings
- Project Quality Plan
- Q.A.QC. Manual
- Q.A. Forms/Checklist
- Method Statements as applicable to site Supporting Procedures
- Approved Inspection & Test Plan and Check sheets

One copy will be retained for a minimum of 1 year after receipt of Final Acceptance Certificate.

All original drawing are stored for 5 years in the Head Office and the electronically archived documents will be kept for 10 years period.

8. OPERATIONS

8.1 Operational Planning and control

At the commencement of the Project, the Quality Engineer prepares a Quality Control Plan, which defines how the execution of work is monitored. The Quality Control Plan/ ITP refers to control documents (e.g. specifications, drawings, method statements, checklists), defines who is responsible for checking the work and the verification documents to be used to record acceptance of the work. When there is a requirement for the Consultant or Statutory Authority to be involved in the checking of work, the same is indicated in the Quality Plan/ITP.

T.ONE has planned, implemented and controlled the processes which need to meet the requirements for the provision of products and services by:

- Determination of Products and service requirements during the enquiry stage and communicate to the Operations team through contract review form/ job cards and other documents from the customer
- Planning the service provision based on the programme
- Achieving conformity to products and service requirements and controls it through Surveillance Inspection Reports / Observation Reports / Internal Audits / Work Inspection requests etc
- Determining the resources needed to achieve conformity to the product and service requirements
- Determining, maintaining and retaining documented information to the extent necessary:
  - To have confidence that the processes have been carried out as planned
  - To demonstrate the conformity of products and services to their requirements

The output of this planning shall be suitable for the organization's operations. The organization shall control planned changes and review the consequences of unintended changes, taking action to mitigate identified risks as necessary.

Management will ensure that the relevant documents needed for specific services are available in full and customer's requirements are adequately understood.

A detailed internal review meeting monthly will be held on the basis of confirmed orders, the review will ensure adequate resources are planned and provided for smooth execution of job.

Records needed to provide that realization processes and resulting products meet the requirement are maintained

8.2 Requirements for Products and services

8.2.1 Customer Communication

Business Development Team determines the customer requirements related to product information, contract reviews are effectively communicated with the customer. The customers are communicated on telephone promptly and on emails, fax, letters etc. on their queries for theproducts as well for the confirmation of the order, status of the order etc. Amendments if any willbe communicated to the customers to make suitable changes in the customer requirements.

In case of any customer complaints, the details are logged in the customer complaints log and its remedial and corrective action will be taken and communicated to the customer if required.

8.2.2 Customer properties:

Any kinds of material/services received for the purpose of service delivery from customers as well as from the external parties an effective system is established to identify, verify and protect and safeguard the customer property for that use. If any customer property is lost or damaged or found to be unsuitable condition, this will be reported back to the customer / external party and effective replacement will be done as per the agreement.

The control on customer properties includes intellectual properties, personnel data shared by customer / external party.

The customer feedback are taken periodically and reviewed during MRM. Based on the discussions in the management review, action plan will be communicated with customer if required.

8.2.3 Determining the requirements for products and services

T.ONE shall determine the requirements specified by the Customer including any statutory and regulatory requirements applicable to the product before acceptance of a purchase order. Any additional requirements considered necessary by the organization.

Post-delivery requirements may include actions under warranty provisions, contractual obligations such as maintenance services.

Operation Manager in consultation with Business Development manager/ Project coordinator, determines the scope, quantity and time and material required for each project.

For smooth execution of job, bill of quantity /quotation are prepared based on customer requirement against which the estimated selling price will be arrived. The quotation approval, negotiations & contract review etc., are done with client and final sub-contractor agreement will made based on the agreed terms.

OM will review requirement specified by the customer in quotation /tender document and its delivery and post-delivery activities. The requirements not stated by the customer but are required to be fulfilled during the execution of the project or job will be consulted in advance and relevant correspondence in this regard will be kept in the file, all statutory and regulatory requirements will be mutually discussed before accepting the contract.

The requirements of the product is adequately defined and determined before the acceptance ofthe order on the following parameters

- The product requirements specified, including delivery and post-delivery activities.
- Any other specific requirements related to product (stated or implied).
- Any statutory or regulatory requirements applicable to the product
- Any information/ requirements prescribed by the organization itself

The site installation / execution details will be communicated from the Operations department to the customer after the planning.

8.2.4 Review of the Requirements for Products and Services

The requirements determined initially are reviewed by Business Development Manager related to specified product requirements (during submission of tender, acceptance of contracts or order, acceptance of changes to contract or order) to ensure supply of products/services as per the requirements agreed. The ability of the organization to provide the services on time is also reviewed. The differences, if any, are suitably reviewed and are resolved/ amended as agreed with the customer.

Contract Review Process:

The review process of each contract [order] shall include the following:

- The Quotation value
- The margin details
- Customer Specification
- Material Specified
- Cost sheet
- Delivery and post-delivery terms and condition

8.2.5 Changes to Requirements for products and Services

T.ONE ensures that changes required for the products and services are documented inthe job variation card, the reason for the change is recorded and the relevant persons are madeaware of the changed requirements.

8.3 Design Control

There is no design control involved, since all the design documents are Client supplied. Development of all shop drawings and as built will be done as per approved of shop drawing process and contract specifications.

Shop Drawing Preparation, Submission and Resubmission.

Development of all shop drawings and as built will be done as per approval of shop drawing process.

Preparation

- The Project manager responsible to forward the contract documents to office engineer.
- Office engineer will distribute the document to the project staff and Public Utility Agencies.
- Received the feedback from the project staff and Public Utility Agencies, processing the received information's and prepare the Shop drawings with drafting section.
- Check and approved shop drawing received from drafting section and forward to Project Manager for approval.

Submission and Resubmission

- After project manager approval shop drawing will be submit to Consultant through Document Transmittal sheet (Project Specific Form) and Contractor's working drawing submittal (Project Specific Form)
- Consultant review the shop drawing and comments as follows

Transmittal Status	T.ONE Action
A – Approved	PM will distribute to the office engineer and users.
B - Approved As Noted	Can proceed the work. Fulfillment of the consultant comments as required.
C - Revise and Resubmit	Resubmit the shop drawing in cooperating the changes in new revision.

8.4 Control of Service Provision

T.ONE Contracting operates a system which ensures that all requirements for servicing upon the projects are performed as per contract requirements. The requirements for servicing (guarantee, maintenance, repair, etc.) are defined within the contract documents of each project.
The project manager is responsible for taking action to any servicing requirements upon completed projects.

This is accomplished by a dedicated servicing team for all completed projects. Where a servicing requirement is the responsibility of a subcontractor, the concerned subcontractor is contacted, and arrangements made to complete the servicing action.

The servicing actions are documented by log books, clearance forms and/or by letters between the client and the company which are kept in the relevant project files.

The final acceptance/completion certificates are retained as records of compliance of servicing period.

8.5 Purchasing –Procurement Organization

In purchasing materials, equipment, spares and services, the company attaches critical importance to evaluation and selection of subcontractors / suppliers, communication of requirements to subcontractors / suppliers, receiving inspection and verification of purchased products.

Procedures have been established which ensure that:

- Approved suppliers/vendors are used and a mechanism for selection of new suppliers is in place (suppliers includes subcontractors).
- The performance of subcontractors is monitored and recorded.
- Purchasing documents clearly and completely describes the material ordered and the quality requirements in terms of approval of product, process, qualification requirements and compliance to specific standards as applicable.
- Verification arrangements and authority for release of product are clearly notified to the supplier.
- Purchase documents are reviewed and approved prior to release.
- No incoming material is used until approved through the process of receiving inspection.
- The requirement of the company or the customer to verify products/services at the suppliers wherever required is stipulated in the purchasing documents.

8.5.1 Procurement of Subcontractors

T.ONE selects experienced, qualified subcontractors with proven performance records for the construction team.

The following flowchart describes the process of selection of subcontractor where the need of subcontractor is raised by the project manager or site engineer. Generally, the company has an agreement with the subcontractor such that the subcontractor complies with the terms and conditions in the project agreement between the client and the company. Subcontractors are selected from the client's approved list of vendors. Working together at the project,

T.ONE's project management team quickly identifies and resolves potential project challenges. Before starting the work all subcontractors' pre-qualifications are submitted to consultant for review and approval from consultant and local authorities as well.

8.5.2 Control of Subcontractors

The quality actions required from subcontractors are established before the subcontractor starts work. Where a subcontractor implements his own quality control plan, the same will be reviewed and approved by the person responsible for Quality at site in conjunction with the Project Manager. When a subcontractor does not have his own Q.A. Management System then will be asked to follow T.ONE's Q.A Management System.

Subcontractors are responsible for the quality of their work and are required to take precautions to protect their work from damage and deterioration during the course of the Project.

Regular meetings are held with the subcontractor to discuss safety, quality and environmental matters, as well as progress on the project and any delays and claims, and that minutes of these meetings are distributed to the relevant parties

T.ONE will monitor the subcontractor's performance to ensure it meets the project's safety and quality requirements, and that work is in accordance with the project's schedule and specifications

8.5.3 Vendor / Supplier Evaluation:

All suppliers (Including subcontractors) used for the project will go for a meticulous evaluation criteria to prove their performance. Suppliers are evaluated based on the following criteria:

- Response to Enquires
- Price Competitiveness
- Compliance to specification requirements
- Capability to supply product /Services as per the site progress
- Favorable Payment Terms
- Handling of Complaints

During the performance evaluation of vendor, the vendors will be graded as A(>85%), B(85%-60%), C(<59%), based on the performance appraisal rating. If a supplier performance falls in the C category (<59%), it will be communicated to the supplier. Senior Projects Manager remarks on "C" grades suppliers will be considered as final for removal or retention in the supplier list, subject to approval from Senior Projects Manager. If the result is blacklisted the internal circular will be send in this regard to Project Engineer / Purchase Executive/Store Keeper.

8.6 Product Identification , Traceability And Control

Operations control is established by way of identifying and planning those operations or tasks in the construction processes, which can directly affect quality. The system ensures that these processes are carried out under controlled conditions. Where necessary, Standard and specific procedures and

work instructions are incorporated into the control of the process and implemented where the absence of the same would effect quality. Project Quality Plan/Quality Control Plan/inspection Test Plan are developed and implemented for major construction or installation projects.

The method statements are produced for major construction activities. These statements do address the process of specific activities in broadest sense defining the safe controlled working practice.

A maintenance program is applied to our construction equipment in order to sustain process capability.Where International or National Standards apply the appropriate references are included in relevant documentation.

All stages of the process are subject to monitoring at prescribed frequencies to ensure compliance with established parameters.

The post contract activities of providing maintenance period servicing are controlled as per the contract requirement.

8.7 Preservation

The products are preserved against any external damages by keeping the item in covered conditions as per the manufacturer's instructions. Incoming, processing and delivery products are protected against any damage by keeping in a designated area.

The chemicals are stored separately as per the manufactures guidelines, safety requirements and temperature control requirements as applicable.

For all shelf life materials, during the process the product conformity is checked with manufacturing date and the details of shelf life is maintained in oracle at stores level to control products bearing expiry dates.

All scrap paints/ chemicals are collected in a drum and the same is disposed through a municipality approved waste disposal code.

At site materials will be stored in the designated storage areas and during the installation area will be barricaded to prevent damages due to un-authorized entries. Upon completion of the work area will be handed over to the main contractor to proceed with subsequent activities.

8.8 Client/customer Supplied Product

T.ONE operates a system which ensures that customer property (free issue material or equipment) supplied by the client for incorporation into the project is controlled, cared, and checked for quality

and quantity and recorded within the store system. Client property includes the site, and the intellectual property contained in contractual specifications, BOQs and drawings.

Any customer/client property borrowed from the client for temporary use during the project shall be returned to the customer intact at the end of the project or when the customer asks for it as per the agreement and normative reference of the industry. Any item lost, damaged or unsuitable for use is reported to the client, and suitable records are maintained.

8.9 Post-delivery Activities

Post-delivery activities is determined and controlled to provide product and services thorough the intended lifetime of the product to the customers' requirements specified by the contractual obligations, and warranty provisions set aside for this purpose. To provide customer feedback and consideration for statutory and regulatory requirements, and the potential undesired consequence associated with product and services

T.ONE meets the requirement for post-delivery activities associated with the products and services. In determining the extent of post-delivery activities that are required, the organization complies with the following points:

- Statutory and regulatory requirements.
- The potential undesired consequences, nature, use and intended lifetime of its products and services if any which is included in the product label/ manual.
- Warranty will be provided as per the terms and conditions agreed during the order confirmation.
- Customer complaints received during the warranty period will be handled by the quality and Operations team.

Issues of Material

- For all Permanent construction materials received at site , a Material inspection request will be raised to the Engineer/Consultant attaching all the supporting documents (which includes material submittal approval copy, delivery notes, QC reports etc.) and approval will be obtained prior to site usage.
- All construction material, tool, instruments, consumable, stationery etc. shall be issued, by Storekeeper, on site after due authorization of the Project Manager in accordance with T.ONE 's QA/QC Policy and /or the outstanding instructions and as follows: -
- It is the policy of T.ONE to ensure that all field staff (i.e. Engineer, Foreman, Surveyor, etc.) shares the commitment of the company to pursue and maintain quality management policy.
- Therefore, the Project Manager and each individual personnel must ensure that all activities on site are controlled and the materials are effectively utilized within the least minimum wastage

and at an absolute zero loss or damages to the material, tools, instrument…etc. and all issued materials are recorded ad documented for verifications v/s actual consumed/utilized and identified or incorporated within the final measurements and As-built drawings.

8.10 Release of products and services

8.10.1 Snagging And Handover

Project

As the Project nears completion, a snag list is prepared for the works, and items on the snag list are made good prior to inviting the Client/Consultant to participate in handover inspection. Unsatisfactory items pointed out by the Client/Consultant are rectified within an agreed timescale.

Handover file

The responsibility for ensuring that the handover data package,or the handover file, is being compiled is a joint responsibility amongst T.ONE site management team; coordination and follow up on compilation and submission of the handover file will be lead by the Snr. Projects Engineer, assisted by the. QA/QC Manager.

The handover file will be organized and setup in accordance with Contract requirements. Accordingly, and with reference to the Conditions of Contract, the "handover file" will contain:

- As-Built Drawings.
- Operation & Maintenance (O&M) manuals.

It is the culture and commitment of T.ONE to deliver all quality deliverables as per contract requirements. Furthermore, T.ONE implements an Integrated Management System (IMS) where the cycles of surveillance and recertification audits take place regularly.

This will be applied on the project to confirm the company's transparency and compliance to requirements. The same can be provided as endorsement.

Below are Project Deliverables as per project requirements.

- Advance Payment Guarantee
- Performance Guarantee
- Progress Report
- Contract Drawing and Documents
- Tender Documents
- Engineering Reports
- Quality Reports

- Design Review
- Technical Interpretation
- Site Investigation Report
- Equipment and Tools
- The Project Itself

8.10.2 Receiving Inspection And Testing

- All product and services produced for the execution of the project and/or being used for the construction activities will be checked, inspected and tested by the Storekeeper and QA/QC Department in conformance with T.ONE 's QA/QC Plan "Procurement Procedures".
- All product and services for the project execution should have SAT AND FAT approval prior to commencement at site and usage from Consultant and Local authority.
- Material approval submittals will be submitted to obtain the Client/Engineer's approval where necessary, prior to placing the procurement and purchase orders.
- T.ONE 's QA/QC Team will initiate all inspection and testing requirement for materials as per the approved inspection and Test Plan. The entire QA/QC test will be performed by the Approved Third-party Laboratory or Dubai Central Laboratory as per approved inspection and test plan, project specification.
- Where incoming product is released for urgent production purposes, such material will be identified and recorded in order to allow for easy and immediate recall and replacement in the event of non-conformance to specified requirements.

8.10.3 In Process Inspection And Testing

- T.ONE 's Site Engineer and the construction team as well as QA/QC Team will execute all activities as per the project's specifications and QA/QC Plan and requirements.
- The QA/QC Engineer will arrange the third-party lab to perform the inspection and testing of the executed works as per the approved QA/QC Plan at early stage of the construction activities.
- The QA/QC Manager reflecting the particular requirements of the contract specifications will prepare Inspection and Test Plans (ITP).
- The Inspection and Test Plan (ITP) will identify the requirements i.e. review, surveillance, witness and hold points.
- The ITP plan shall indicate the level of inspection to be carried out by T.ONE , their sub-contractors, vendors and Client where appropriate.
- Each test and inspection plan shall be numbered, using the system that will identify the location of the work area on the drawings.
- Specialists, subcontractors will be made responsible for the preparation of their own ITP's to the approval of T.ONE , the Client/Engineer wherever appropriate.
- Where a particular phase of the work needs to be inspected and/or tested, the QA/QC Engineer and conducting inspectors shall notify the Consultant / Client prior to the assigned date for

witnessing and sign-off (if required), utilizing the appropriate forms in accordance with QA/QC approved Plan.

- The Laboratory Technician shall co-ordinate the Independent laboratories to perform tests as required, stipulated in the contract and noted in the QA/QC Plan. All such inspections and tests shall be documented properly.

- T.ONE shall ensure and carryout the following: -
  - Inspection, test and identify product as required by the QA/QC Plan and documented procedures.
  - Establish products conformance to specified requirements by "use of process monitoring and control" as documented in T.ONE 's QA system and approved QA/QC Plan.
  - Hold product until the required inspection and tests have been completed or inspection and test reports have been received and rarified. This shall exclude the released product. (i.e. on urgently) under positive recall documented procedures.

8.10.4 Final Inspection And Testing

- The final inspection and testing will be performed by T.ONE 's QA/QC Engineer and QA/QC team similar to the "on receipt and in process" to ensure that all the documented test and inspection reports and al data meet the specified requirements of the project and the contract.
- Final inspection and testing will be carried out in accordance with T.ONE 's QA system and QA/QC approved plan to complete the evidence of conformance of the finished product to the project's specifications.
- No product shall be dispatched until all the specified activities have been satisfactory accomplished and all associated data and documentation is available and authorized.
- Subsequent to the completion and documentation of the final inspection and test will be offered for Consultant/Client inspection and approvals.
- All materials produced for the execution of the project and/or being used for the construction activities will be checked, inspected and tested by the Storekeeper and QA/QC Department in conformance with T.ONE 's QA/QC Plan "Procurement Procedures".
- The Client/Consultant's approval on the final inspection and test will be recorded and documented/field as appropriate and in accordance with the approved T.ONE 's QA/QC Plan and QA System, which give the evidence that the product has passed Inspection And/Or Test.

8.10.5 Inspection And Test Status

- The inspection and test status of product shall be identified by using markings, authorized stamps, tags labels routing cards, inspection records, physical location or other suitable means, which will indicate the conformance or non-conformance of product with regard to inspection and tests performed.
- Measures shall be established to identify inspection and test progress. Such measures shall provide means for ensuring that required inspection and tests are performed during each phase

of the construction activity and during installation.

- Records shall identify the inspection authority responsible for the release of conforming product.
- T.ONE 's QA/QC Team shall also ensure that the required resources are available to meet the work schedule and thus the status of the inspection and test work is known throughout execution of the project.

8.10.6 General Requirements Of Testing And Sampling

- A detailed test program form will prepare covering the frequency of testing, standards, clause of general specification.
- Test results shall not be below the minimum and /or specified tolerances and requirements of the contract documents or of the selected specification / standards / codes or other approved by Client.
- Prior to material purchasing, T.ONE shall submit complete information's on the required material, sources, manufacturer's name, supplier name, catalogues, test certificates and Mill certificate for the Engineer/Client's approval.
- Once the material fulfills the above requirements then T.ONE shall have the right to store more materials on site of the same approved quality.
- Prior to any construction, T.ONE shall store on site sufficient quantity of materials for inspection, sampling and testing. None of these materials shall be used in construction unless it has passed all the necessary tests and the Engineer/Client has approved it.
- All stored materials on site including spare parts of construction equipment shall be sufficient to keep the construction activities on site for at least 2 weeks at all times.
- Client reserve the right for more tests and the cost shall be borne by T.ONE ting if the test results are not in conformity with the contract requirements.
- Sampling during construction shall be done whenever required by Client, if found necessary.
- Method of sampling, volume, weight of samples for each required test should be done as per the specified standards/codes. In the absence of such information's, the Client may decide on the practical procedure to be followed.
- Sufficient advance notice but not less than 24 hours shall be given by T.ONE for sampling of materials and testing by submitting a checking advice and required tests, specification and limits to the pre-approved Independent Laboratory Testing Company. The checking advice shall contain all the necessary information's, which will be sent formally stating the Client, Consultant, and Project's Name/ID. No and the number of samples etc.
- Sampling shall be done in the presence of all involved parties (i.e. Consultant, T.ONE , and/or supplier if necessary). Samples shall be kept in sealed bags and handed immediately to the approved lab representative for testing.
- Testing shall be done in Laboratories duly pre-approved by Client, however, Client reserves the right to conduct or repeat any test in any other Laboratory.
- Fee and cost for testing inclusive but not limited to the supply of material, transportation, sampling, testing, storing, supplying or specific equipment, written inspection, workmanship repetition of tests, whether carried out in UAE or outside UAE shall be borne by T.ONE .

- T.ONE shall remove immediately from site at his own expense all materials or delivered materials that are not in conformity to the Contract's documents and specifications.
- Other tests specified but not limited stated in T.ONE QA/QC System or in the aforesaid items shall be carried out as per the Contract Documents, as per the relevant codes and standards and /or as required by the Client.

8.10.7 Control of Inspection

All inspection, measuring, and test equipment used to demonstrate conformity of the product is identified controlled and maintained on a regular basis.

Equipment used to demonstrate the conformance of work to specification is regularly checked in accordance with the procedure. Records are maintained to demonstrate that the equipment remains within acceptable accuracy and precision.

Equipment which affects the quality of the finished work is regularly checked and maintained.

Third parties who perform testing for the Project are required to be accredited, or to provide evidence of the calibration of their test equipment.

Results of calibration, indicating calibration status, are recorded and maintained. Calibration certificates/records provide traceability to recognized National or International Standards.

Defective equipment is taken out of service for repair or disposal. Where defective equipment has been used to verify previous product quality the validity of previous results is re-assessed.

Appropriate methods have been established to prevent damage or adjustment to calibration settings to equipment during storage, handling etc. Where contractually agreed information related to cali bration shall be communicated or submitted to customer.

8.11 Control of Non-Conforming Products

In accordance with the Procedure for Control Nonconforming product which fails to meet specified requirements is identified using "Non-conformance Report" is instigated. The agreed remedial work shall be seen to be completed before such work is offered for Client/Consultant's inspection.

Concerned personnel are responsible for identification, recording and immediate reporting of any instances of non-conforming product.

The authority and responsibility for review and disposition of non- conforming product is defined in procedures.

Non-conforming products disposition can be any of the following:

- Accepted as it is under concession
- Re-graded/Modified for alternative application
- Repaired
- Reworked
- Scrapped
- Returned to the supplier

Procedures provide for suitable identification of non-conforming products to prevent unintended use.Any non-conformities reported by the client will be considered as a Non conformity for priority action for which a separate tracker(NCR Register) will be maintained. Correction and corrective actions will be performed and the client will be intimated for further verification and approval to close the Observation/NC/CAR

The procedure requires that, apart from immediate disposition, the reasons for product non-conformities be analyzed to determine corrective actions required avoiding recurrence. The records related to non-conformance, disposition, concession, etc shall be maintained.

9. PERFORMANCE EVALUATION

9.1 Customer Satisfaction

The Company has defined methods to analyses & monitor customer/client satisfaction of products & services delivered.

The information collected is used for analysis of data for ensuring customer/client satisfaction and continuous improvement. The results of such review are submitted for Management Review and subsequent action.

9.2 Internal Quality Audits

Procedures have been established, which ensure that activities throughout the company are regularly audited against company documented Quality System and ISO 9001:2015 standard. Audits are scheduled based on the status and importance of the activity and results of previous audits. The procedures require that an audit schedule be established which includes all relevant activities.

Audits are prepared and planned by trained auditors. The procedure ensures that in all cases the auditor(s) will be independent of the function or area being audited.

Separate internal Quality Management Systems Audit from Head Office will be carried out, Management Systems Audit and Review that form part of the company Quality Management Systems Manual.

The audits will be conducted by QMS Auditors as per the audit schedule given by the QMS Department

from Head Office.

A 3rd party auditor may only be provided access for audit by prior consent of the General Manager.

The Quality Management System shall be reviewed on an annual basis at a meeting attended by Senior Management at Head Office.

T.ONE will allow the Consultant and Consultant authorized third parties to observe/participate in these audits and to conduct additional independent audits, as they consider appropriate to provide assurance that the works are being conducted in accordance with the contract requirements.

T.ONE will invite the Consultant to attend the Environment, Safety and Health and Quality audits as an observer and provide 7 days notification. T.ONE will provide the facilities and access necessary for these audits to be carried out effectively.

T.ONE and its Subcontractors will make available for audit all records necessary to demonstrate that the Works have been executed in accordance with the Contract. They will also provide the Consultant with documents that demonstrate that the Works are progressing in accordance with requirements of the Contract. These are to be provided to Consultant as the Work progresses on an agreed schedule.

All non-conformities discovered during audit are recorded and an audit report is prepared. The results of audits are communicated to respective managers who are responsible for timely implementation of agreed corrective actions.

Procedure requires that the implementation and effectiveness of corrective action be verified by a follow-up audit and recording results.

Findings and results of corrective action of audits are presented and reviewed during management review meetings. This information is valuated to help assess the effectiveness of the Quality System in satisfying the Customer, the requirements of ISO 9001:2015, the quality policy, and to determine if any improvements in the system are required.

9.3 Analysis of Data

The data is determined, collected and analyzed for continual improvement and the effectiveness of the quality management system. The data is collected from relevant procedures mentioned as process indicators and customer satisfaction survey reports In order to ensure that site activities are well controlled.

Analysis of the data provides information on:

1) Effectiveness of the quality management system
2) customer Satisfaction

3) Conformity to cleint requirement
4) Performance of processes
5) Suppliers (if any)

The analysis of data shall also be relevant to the objectives set.

9.4 Management Responsibility

9.4.1 Managing Systems and Procedures

The various processes needed for the quality management system are identified through the interaction of processes identified in the sections of the quality manual.

Procedures are developed for operation and control of processes including purchased process, to monitor, measure, analyze and continually improve processes, wherever required. In the absence of procedural controls, the same is achieved through periodic reviews of performance in terms of Internal Quality Audit Findings.

9.4.2 Management Review inputs and outputs

Management Review meetings are carried out in monthly intervals in order to ensure the quality system's continuing suitability, adequacy and effectiveness in satisfying the Quality Policy, the requirements of the standard, and in meeting the Customers' requirements. The Group Chief Operating Officer Chairs Management Review Meetings and may call unscheduled meetings should the need arise.

The review shall cover as minimum the following over a period of approximately Nine months' time:

a. The status of actions from previous management reviews;
b. Changes in external and internal issues that are relevant to the quality management system;
c. Information on the performance and effectiveness of the quality management system, including trends in:
   - Customer satisfaction and feedback from relevant interested parties;
   - The extent to which quality objectives have been met;
   - Process performance and conformity of products and services;
   - Nonconformities and corrective actions;
   - Monitoring and measurement results;
   - Audit results;
   - The performance of external providers;
d. The adequacy of resources;
e. The effectiveness of actions taken to address risks and opportunities
f. Opportunities for improvement.

Management Review meetings will be attended by the departmental heads. The Group Chief Operating officer may request other management members to participate in the management review meeting as deemed necessary.

Information regarding internal quality audits and corrective and preventive actions taken are reviewed during Management Review and form part of a set agenda for such meetings.

The review output over a period of nine months, as minimum shall cover the following:

- Opportunities for Improvement
- Any Need for Changes To The Quality Management System;
- Resource needs.

The minutes of the meeting shall identify the decisions and actions required including the time frame and personnel responsible for its implementation.

The Management Representative maintains minutes of the meeting and shall ensure the same is distributed to all key functions and communicate the status of the effectiveness of the Quality System to the organization as a whole.

9.4.3 Request for Change / Change Management

Where during the construction Works, if T.ONE . considers that scope of Works has changed, will issue the variation notification providing details of perceived change and the likely time and cost impact thereof.

The variation notification is an integral part of the Change Management procedure, as such will provide sufficient cost management, QS, schedulers, and other staff and other resources to process Variation instruction within 21 calendar days of the perceived change or event becoming known.

10 IMPROVEMENT

10.1 Continual Improvement

Top management is responsible for implementation and taking decision towards continual improvement of quality management system.

The following shall be reviewed in the MRM for continually improving the quality management system and the business of the organization.

- Quality Policy and objectives
- Process measurement results
- Risk and Opportunities.
- Internal Audit Results.
- Analysis of Data relating to Customer complaints, customer satisfaction, Supplierevaluation.
- Management review action plans

- Recommendations for improvement.

10.2 Non-Conformance

Material and product or work/processes that do not meet the requirements of the relevant specifications, contract. Any deviation from work standards, practices, Procedures, to be removed as this for Non-compliance, management system, Performance etc. could either lead directly or indirectly to Product defects, Injury, illness, property damage, and damage to Work place environments, environmental pollution or a combination of these.

10.3 Corrective And Preventive Action

The organization has established procedures to ensure that Customer complaints are acted upon in a timely manner and effectively processed to a satisfactory conclusion.

Procedures require that Customer complaints, whether written or verbal, are recorded and reviewed by authorized personnel to establish that they are justified. In the event of unjustified complaints, a reasonable explanation will be offered to the customers.

All justified complaints are subject to analysis in order to determine the immediate corrective action as well as to establish the root cause of the problem inorder to implement suitable preventive action. Customers are notified of any immediate corrective measures taken as well as what preventive action will be taken to avoid recurrence.

The quality system requires that prompt and effective corrective action is taken after evaluating the need for taking corrective action where product, process or system related non-conformance occur.

Procedures ensure that the reasons for occurrence of non-conformity are thoroughly studied such that the root cause shall be determined. Results of such investigations are recorded. The results of corrective action taken shall be submitted for Management Review.

Corrective/preventive actions are implemented commensurate with the magnitude of the problem. The implementation and effectiveness of corrective/preventive actions is monitored. Any permanent changes resulting from corrective action taken are recorded in appropriate system documentation.

Procedure also requires that available information be studied in order to detect, analyses and eliminate potential causes of non-conformities. Information on subsequent preventive action taken is submitted for consideration during Management Review.

Personnel are encouraged to indicate areas where potential non-conformities may occur and report such situations. Any suggestions on possible improvements of the quality system are also welcomed from all staff.

APPENDIX A

TRADE LICENSE

حكومة دبي
GOVERNMENT OF DUBAI

DUBAI
للاقتصاد والسياحة
Economy and Tourism

رخصة تجارية
Commercial License

License Details / تفاصيل الرخصة

License No.	914812	رقم الرخصة	
Company Name	TONE UNIVERSAL TRADING L.L.C	اسم الشركة	تون يونفرسل للتجارة ش.ذ.م.م
Business Name	TONE UNIVERSAL TRADING L.L.C	الاسم التجاري	تون يونفرسل للتجارة ش.ذ.م.م
License Category	Dep. of Economic Development	فئة الرخصة	دائرة التنمية الاقتصادية
Legal Type	Limited Liability Company - Single Owner(LLC - SO)	الشكل القانوني	شركة ذات مسؤولية محدودة - الشخص الواحد (ذ.م.م)
Expiry Date	03/11/2026 تاريخ الإنتهاء	Issue Date	04/11/2020 تاريخ الإصدار
D&B D-U-N-S ® N	الرقم العالمي	Main License No.	914812 رقم الرخصة الام
Register No.	1522805 رقم السجل التجاري	DCCI No.	348181 عضوية الغرفة

License Members / الاطراف

رقم الشخص/No.	الإسم / Name	الجنسية / Nationality	الصفة / Role	الحصص / Share
1240026	عبدالرحمن هشام طه مقبل ABDULRAHMAN HESHAM TAHA MOQBEL	اليمن / Yemen	مالك / Shares Owner	100.00% حصص
1240026	عبدالرحمن هشام طه مقبل ABDULRAHMAN HESHAM TAHA MOQBEL	اليمن / Yemen	مدير / Manager	

License Activities / أنشطة الرخصة

النشاط	الحالة	Status	Activity
إستيراد	فعال	Active	Import
تجارة عامة	فعال	Active	General Trading
أعمال تركيب المطابخ بانواعها	فعال	Active	Kitchens Installation

Print Date 14/10/2025 12:43 تاريخ الطباعة

Receipt No. رقم الإيصال

الإمـــارات
THE EMIRATES

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجاناً للسنة الاولى
Zoho.com/det

وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي .لمراجعة صحة البيانات الواردة في الرخصة يرجي مسح رمزالاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

العنوان / Address

صندوق بريد	393014	P.O. Box	
رقم القطعة	353-1873	Parcel ID	
البريد الإلكتروني	info@t1-studio.com	Email	
هاتف متحرك	971-55-3964801	Mobile No	
فاكس		Fax No	
تليفون		Phone No	

1ملك محمد سلطان مطر مرخان الكتبي-بردبي الصفا الاولى-SH صاله عرض رقم

الملاحظات / Remarks

تم اضافة نشاط بتاريخ 26.12.2024

رقم الإيصال Receipt No.

تاريخ الطباعة 14/10/2025 12:43 Print Date

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجاناً للسنة الاولى
Zoho.com/det

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

الإمـــارات
THE EMIRATES

وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي .لمراجعة صحة البيانات الواردة في الرخصة يرجي مسح رمزالاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

حكومـــة دبـــي
GOVERNMENT OF DUBAI

دبي
للاقتصـاد والسيـاحـة
Economy and Tourism

شهادة شهر قيد شركة فى السجل التجارى
Commercial Register

تفاصيل القيد / Register Details

رقم القيد	1522805	Register No.	
الاسم التجاري	تون يونفرسل للتجارة ش.ذ.م.م		
الشكل القانونى	شركة ذات مسؤولية محدودة - الشخص الواحد (ذ.م.م.)		
تاريخ الإصدار	04/11/2020	Reg. Date	
تاريخ الإنتهاء	03/11/2026	Expiry Date	
رقم الرخصة الأم	914812	Main Lice. Nr	
	TONE UNIVERSAL TRADING L.L.C	Business Name	
	Limited Liability Company - Single Owner(LLC - SO)	Legal Type	
الرقم العالمي		D&B D-U-N-S ® No.	

تفاصيل راس المال / Capital Details

الإسمى		Nominated	
المدفوع	150,000	Paid	
عدد الأسهم	150	No. of Shares	
العملة	درهم إماراتي	Currency	UAE Dirhams

عنوان الرخصة / License Address

عنوان السجل التجاري / Commerce Address

صاله عرض رقم SH-1ملك محمد سلطان مطر مرخان الكتبي-بردبي الصفا الاولى

أنشطة السجل / Register Activities

تجارة عامة	General Trading
أعمال تركيب المطابخ بانواعها	Kitchens Installation
إستيراد	Import

رقم الإيصال Receipt No.

تاريخ الطباعة 12:43 14/10/2025 Print Date

الإمـــارات
THE EMIRATES

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجاناً للسنة الاولى
Zoho.com/det

وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي .لمراجعة صحة البيانات الواردة في الرخصة يرجي مسح رمزالاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

بيانات التصريح / Permit Details

رقم التصريح	1067910
Permit Nr	
نوع التصريح	إعلانات إضافية على الواجهة
Permit Type	Extra Sign Boards
تاريخ الإصدار	03/11/2021 Issue Date تاريخ الإنتهاء 03/11/2026 Expiry Date
شرح	لافتة اضافية باللوجوالشركة T1
Description	
ملاحظات	لافته اضافيه بالشعار يثبت على الجدار الجانبي
Remarks	

بيانات التصريح / Permit Details

رقم التصريح	1067930
Permit Nr	
نوع التصريح	إعلانات بارزة
Permit Type	Vertical Ads
تاريخ الإصدار	03/11/2021 Issue Date تاريخ الإنتهاء 03/11/2026 Expiry Date
شرح	تي ان تي يونفرسل للتجارة العامة ش.ذ.م.م
Description	T N T UNIVERSAL TRADING L.L.C
ملاحظات	لافته بارزه (باحرف T&T)
Remarks	

رقم الإيصال Receipt No. تاريخ الطباعة 12:43 14/10/2025 Print Date

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجاناً للسنة الاولى
Zoho.com/det

الإمـــارات
THE EMIRATES

حكومة دبي
GOVERNMENT OF DUBAI

DUBAI
للاقتصاد والسياحة
Economy and Tourism

Receipt الرصيد

Receipt Date	**14/10/2025**	**تاريخ الإيصال**	**Receipt No**	**16839870**	**رقم الإيصال**
Business Name	TONE UNIVERSAL TRADING L.L.C			تون يونفرسل للتجارة ش.ذ.م.م	**اسم الشخص**
Procedure	Renew License			Renew License	**نوع الاجراء**
P.V.Nr.	**24633270**	**رقم إذن الدفع**	**License Nr.**	**914812**	**رقم الرخصه**
Payment Mode	Credit Card	7154		Credit Card	**كيفية الدفع**
Amount in Words	Nine Thousand Two Hundred and Ninety One Dirhams And Eighty Five fils /			تسعة وستون ألفا ومئتان وواحد وتسعون درهماً وخمسة وثمانون فلسا	**القيمة بالحروف**

69,291.85	: Amount per Payment Voucher / **المبلغ على حسب اذن الدفع**
0.00	: Credit Card Service Charge / **رسوم خدمة استخدام البطاقة الائتمانية**
69,291.85	: Total Amount / مجموع المبلغ
666961	: Docket Nr. / رقم الحافظه

AAFAQ : Cashier / اسم المحصل

Print Date 14/10/2025 12:43 **تاريخ الطباعة** **Receipt No.** **رقم الإيصال**

الإمارات
THE EMIRATES

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get **FREE** access to Zoho One for the first year
احصل على زوهو ون **مجاناً** للسنة الاولى
Zoho.com/det

وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي .لمراجعة صحة البيانات الواردة في الرخصة يرجي مسح رمزالاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

Print Date	14/10/2025	12:43	تاريخ الطباعة	Receipt No.	رقم الإيصال

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get **FREE** access to Zoho One for the first year
احصل على زوهو ون **مجاناً** للسنة الاولى
Zoho.com/det

الإمـــارات
THE EMIRATES

APPENDIX B

ORGANIZATION CHART

ORGANIZATION CHART

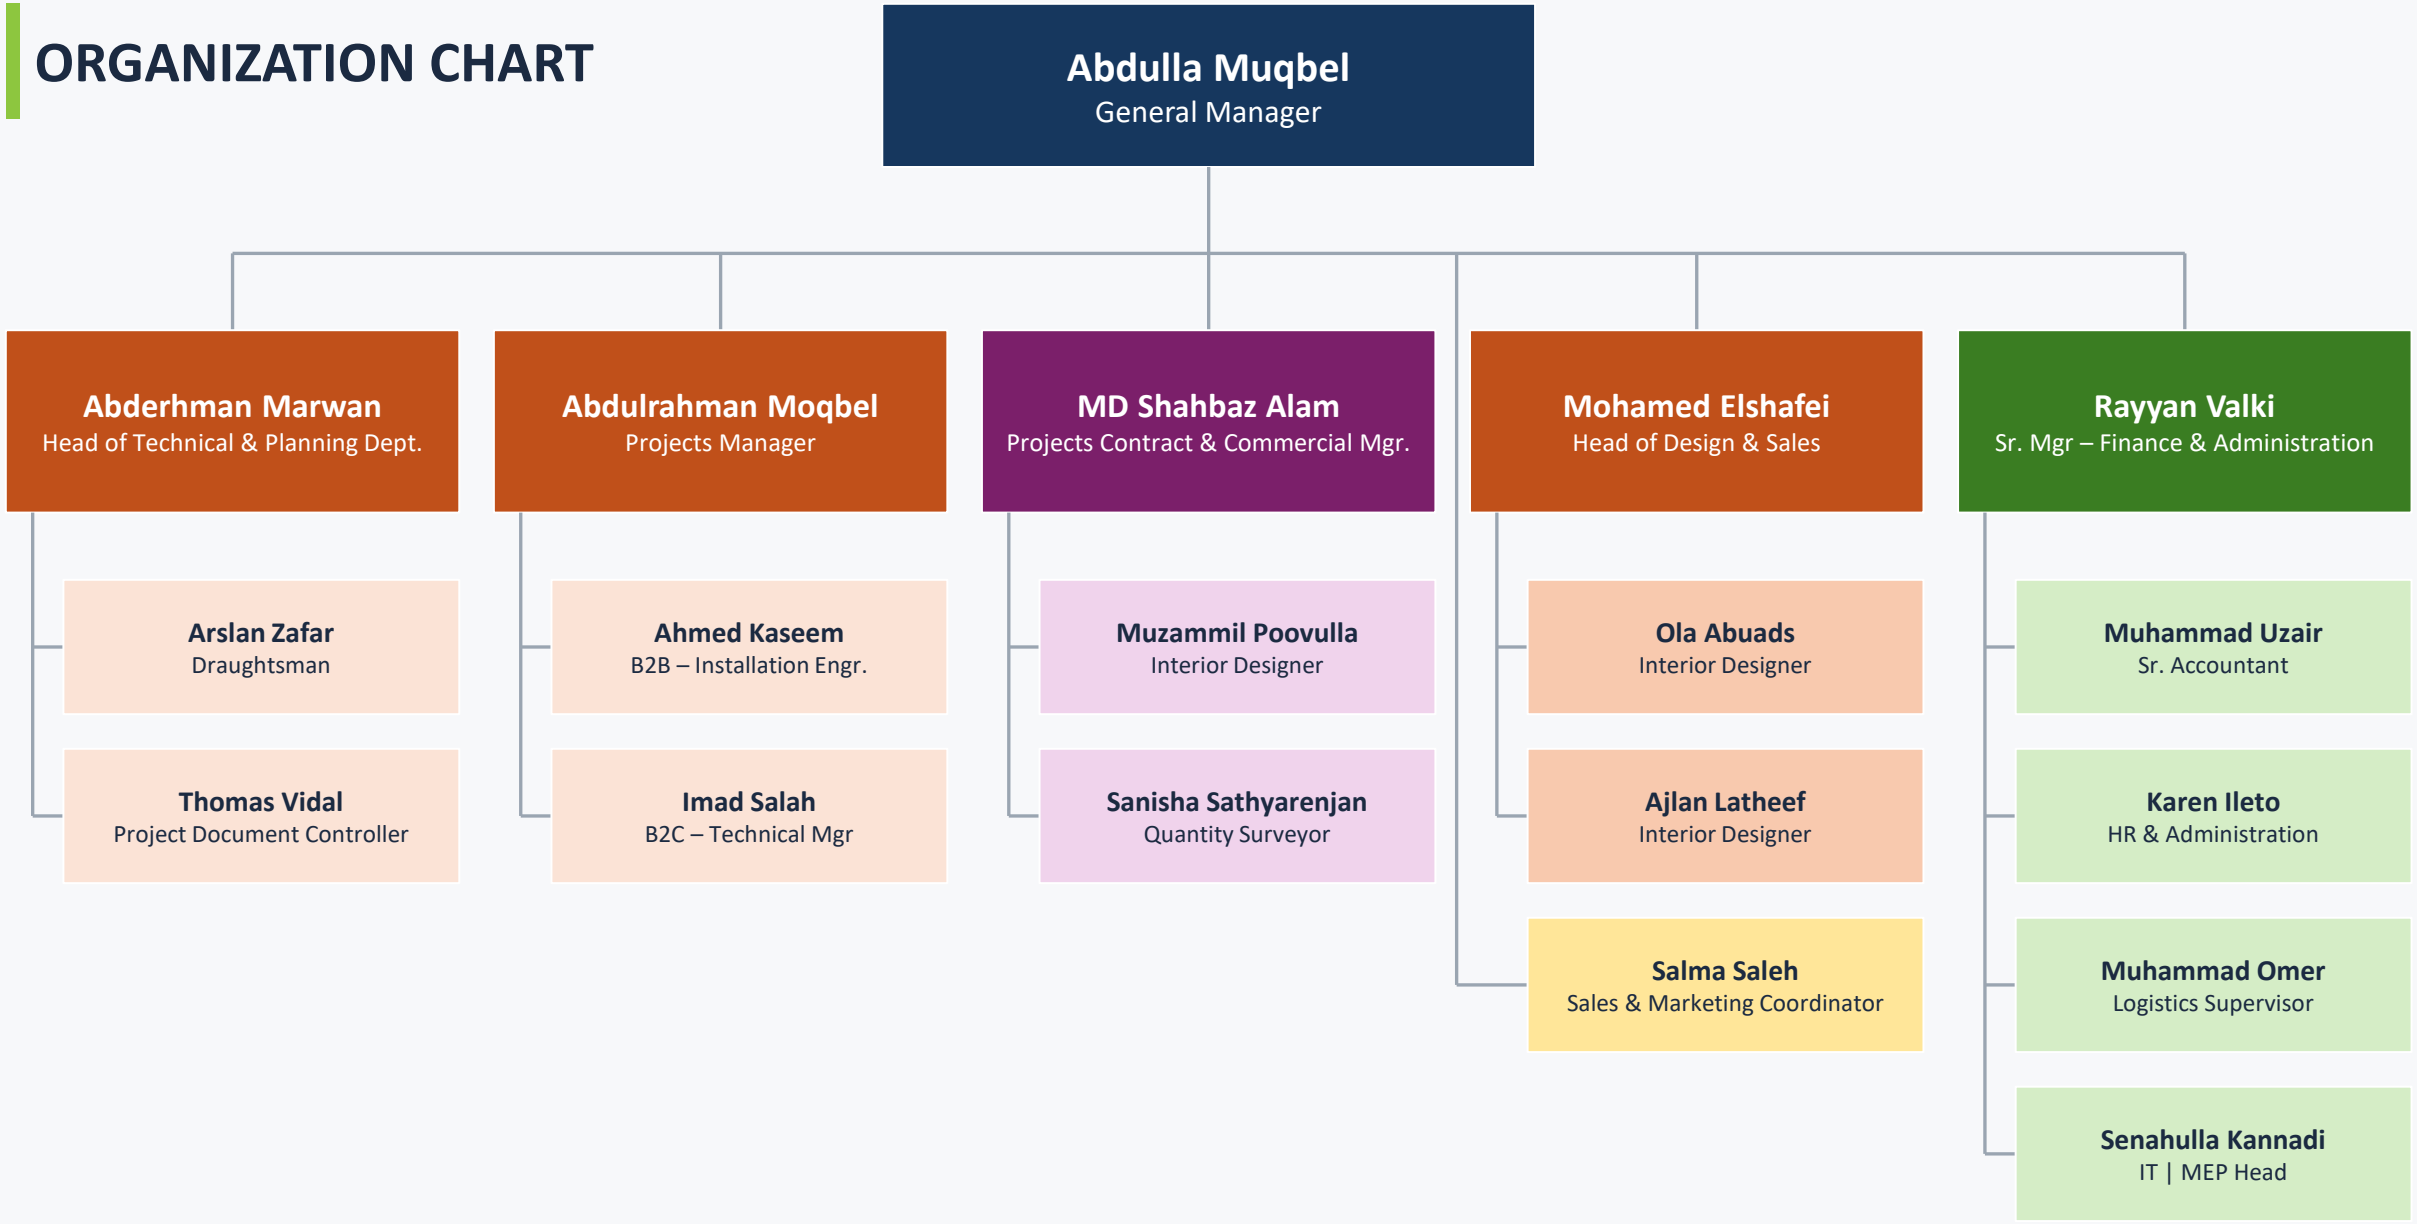

APPENDIX - C

DEFINITION OF TERMS & ABBREVIATIONS

QMS	:	Quality Management System
PQP	:	Project Quality Plan
ISO	:	International Organization for standardization
T.ONE	:	T`
DM	:	Dubai Municipality
DEWA	:	Dubai electric and water authority
RTA	:	Road and transport Authority
MR	:	Management Representative
PM	:	Project Manager
PE/SE	:	Project Engineer/Site Engineer
QA/QC	:	Quality Assurance/ Quality Controller
QA.QC Manager	:	Quality Controller Manager
MST	:	Method Statement
BOQ	:	Bill of Quantities
ITP	:	Inspection & Test Plan
QCP	:	Quality Control Plan
NCR	:	Non Conformance Report
CAR	:	Corrective Action Report
O&M Manual	:	Operation & Maintenance Manual
Rev.	:	Revision
Doc	:	Document
NOC	;	Non objection certificate
IR	:	Inspection Request
SD	;	Shop drawing
CD	;	Construction Drawing
OH&S	:	Occupational Health & Safety
HSE	;	Health & safety Executive
QS	:	Quantity Surveyor
SWOT	:	Strengths ,weakness ,opportunities and threats

APPENDIX - D

PROJECT ORGANIZATION, ROLES & RESPONSIBILITIES

PROJECT TEAM

The company resources include a core group of qualified and trained engineers, professionals, skilled and experienced tradesmen, construction equipment's and machineries and is supported by AutoCAD facilities, computerized project monitoring, state-of-the-art accounting and cost control systems. The following key personnel are initially assigned to the project:

A. Project Manager
B. Project Control Manager
C. Plant and Transport Manager
D. Planning Engineer
E. Sr. Quantity Surveyor
F. Quantity Surveyor
G. Liaison Manager
H. Technical Manager
I. Project Engineer
J. QA.QC Manager/Engineer
K. Sr. Material Engineer
L. Site Engineer
M. HSE Supervisor / Manager
N. Chief Surveyor
O. Time Keeper
P. CAD Draughtsman
Q. Document Controller

ROLES & RESPONSIBILITIES

A. Project Manager

Shall report to the Director Projects / Contracts.

Job Description:

The function of a Project Manager is to communicate effectively with the client/consultant to identify needs and evaluate business solutions and strategies.

The Project Manager shall internally oversee the performance of the project team working on client engagements for the project. The Project Manager shall have the full authority and overall responsibility for the correct technical, economic and financial running of the project until its completion, and shall guarantee to meet the timetable requirements, the cost and the quality as well as the follow-up of the objective profits of the company.

Responsibilities:

- To represent the company when dealing with contractual issues with the employer and/or their official representative.
- To ensure the elaboration and verification of the contractual budget and the budgeting activities.
- To ensure the implementation of the Quality System through the application of the contract documents with respect to the contractual aspects and local norms and procedures.
- To ensure the protection of the assets of the company assigned for the awarded contract.
- To maintain a relationship with all of the company's departments and partners involved in the different activities of planning, provisions and execution of the awarded contract.
- To ensure, during the course of the execution of the work, with the support of competent establishments, the respect of the standards of the local Laws being: building and town planning, environment, health, safety and security, fires, hygiene, sanitation and pollution control.

1) Project Management:

- To manage the strategic aspects of large engagements and to mitigate any risk.
- Ensures engagement reviews and quality assurance procedures take place for all practice engagements.
- Provides leadership to practice within a project.
- Develops and implements strategic objectives for practice that are aligned with the Project's strategic initiatives.
- Review status reports of project engineers and to address issues as appropriate.
- To lend expertise to all internal teams and forces.
- Enforces standard policies and procedures.

2) Project Accounting:

- Updates the financial status of the project.
- Consolidates and analyzes profitability, revenue, margins, bill rates and utilization across the scope of the project.
- Helps create future forecasts and broad-based financial picture of the project.
- Addresses and resolves all billing issues of the project.
- Ensures that the project meets or exceeds budgeted financial objectives, including revenue and margin.

3) Financial Management:

- To develop and meet the revenue and other financial goals of the project.
- Accurately forecasts revenue, profitability, margins, bill rates and utilization of resources across the project.
- To manage the negotiation of contract pricing when necessary.
- To prepare and procure required approvals of interim payments, monthly progress cost control report, variations of work report, and supplier's/sub-contractor's payment.

4) Technical Understanding:

- To evaluate and redesign practice offerings.

- To understand the implications of different technical choices and to be able to guide the consultant/client to the best solution for the situation.

Authority:

- To monitor and ensure that the project meets or exceeds budgeted financial objectives, including revenue and margin.
- To head his team in all Contractual matters with the Client/Consultant.
- To appraise the performance of his Project Management team.

B. Project Control Manager

Responsibilities:

- Conduct Contractual & Financial study and outline claim details with PM.
- Review claim documents and forward to PM.
- Start execution of the work upon intimation from PM. Liaise with the consultant.
- Give extra attention to the specified items while selection of material / source, subcontractors and throughout the work period.
- Send daily requirement to plant one day in advance.
- Receive Snag List from P M and advise the site staff to complete on time.
- Receive completion of Snag List from Site Engineer and inform PM/ return to Site Engineer for completion.
- Approve / Reject Time Sheet.
- Study specification and advise Material Engineer to prepare material submittal.
- Check details and Specifications of materials to be submitted
- Receive rejected work information and advice Site Engineer to rectify in coordination with consultant.
- Prepare Project requirements like plant, material, camp etc. compile and forward to Project Manager and discuss.
- Send material requirement and plant/ machineries requirement to Project Manager.
- Receive material, plant / machineries and all other ancillary items from Project Manager and advise Site Staff to start work.
- Advise Site Engineer to start the work as per schedule and advice Office Manager/Office Engineer to provide details.
- Receive rejected request and advise Site Engineer to rectify the work.
- Receive time sheet from Site Engineer and approve / reject.
- Receive material request and approve / reject.
- Advise Section Engineer and Storekeeper to preserve the material as per manufacturer's recommendation.
- Initiate new IMS document / procedure or revision to existing one.
- Replace IMS documents master list, receive and update documents.
- Receive Internal Audit Program.
- Decide the proposed Corrective Action Request acceptable or not.

- Propose Corrective Action in case of acceptance.
- Give justification in case of rejection of the proposed corrective action request.
- Follow up audit conduction.
- Identify the need for training and evaluate training received for the employees in the section.

C. Technical Engineer

Responsibilities:

- Reports to the Technical Manager (Structure/Utilities &Roads).
- Assist to the Technical Manager in the project for all technical matters.
- Coordinate with the service authorities for technical issues on site.
- Assist the Technical Manager in developing submission schedule.
- Lead and guide the drafting team working with the technical team.
- Prepare/review, compile the technical submittals as per submission plans.
- Coordinate with subcontractor/supplier/external parties for submission of documents on time
- Attend technical meetings with the Engineer/Employer, service authority.
- Arrange for distribution of construction documents on time.
- Ensure the submittal logs are updated and maintained for use to all concerned.

D. Construction manager (Roads & Utilities)

Responsibilities:

- Report to the Project Manager
- In charge of all site construction activities in the project.
- Plan the works on site giving adequate time frame for carrying out the activities
- Responsible for monitoring the site activities and identify any delays
- Review the shop drawing and method statement prior to start any activity.
- Ensure that all the work shall be executed as per the method statement.
- Manage and guide the Site Manager, Site Engineers, surveyors.
- Arrange for all work inspection requests, raised at the agreed hold points.
- Arrange for all daily reports, submitted on a daily basis to the Engineer.
- Measure the site team understanding for their role and outputs.
- Ensure that all the resources and tools are available and in a good condition.
- Responsible for reporting the progress on a daily basis.
- Review the daily reports before submission to the Engineer.
- Be vigilant to implement all HSE requirements prior to start of any activity.
- Check the work at site and ensure that works are in compliance to project specifications.
- Ensure that all the materials being used are from the approved supplier and inspected and approved by the Engineer for construction.
- Liaise closely with Technical and QA/QC departments and provide support for Project Management System implementation

E. Site Manager (Roads & Utilities)

Responsibilities:

- Report to the Construction Manager.
- Check the progress at site and report for any problems.
- Ensure all workers at site are attended necessary induction.
- Ensure that required NOCs are in place, if applicable, before start of any activity.
- Review & brief the drawings and method statements to the subordinates prior to start any activity at site.
- Ensure that all the activities are being executed in a safe manner.
- Provide necessary input to the Daily Reports for submitting to the Engineer.
- Prepare Daily Site Report mentioning the progress, delays, resources etc.
- Liaise with the QA/QC department for quality issues and for the closure of any Non-Conformance.
- Monitor the all the activities closely to avoid any Non-Conformances.

F. Roads & Utility Project Engineers

Responsibilities

Reports to the Site Manager (Roads and Utilities) with regard to the respective Civil, Mechanical or Electrical discipline.

- Review all the design drawings and identify any areas of concerns through raising RFI's.
- Assist the Site Manager (Roads and Utilities) in managing the RFI status.
- Responsible for input for the development of the program of work
- Responsible to review the drawings from different disciplines and its correlation with their respective discipline.
- Responsible for the development of Shop Drawings Schedule.
- Responsible for the development and review of shop drawing.
- Responsible for the development of Technical submittals as required.
- Responsible for the development and review of the As Built drawings.
- Responsible for managing the Draughts Man output.
- Responsible for following up the construction schedule and ensure that all the activities are running as per the agreed schedule.
- Ensure that all the construction at site as per the agreed method statement and Inspection and Test Plans.
- Assure that all the activities are being executed at site in a safe manner.
- Ensure that the procurement process is ongoing based on the agreed schedule.
- Responsible for the development of Status Reports as required demonstrating the project status with respect to progress, submittals, Safety and Quality issues
- Ensure that the availability of adequate resources is present for each task.
- Development and Submission of Monthly Reports.

G. Site Engineers

Responsibilities:

- Reports to the respective Construction Managers & Site Managers.
- Check the progress at site and report any problems.
- Review & brief the drawings and method statements to the subordinates prior to start any activity at site.
- Ensure all permanent construction materials are approved prior to construction
- Supervise closely the construction activities to meet defined product quality requirements, in a safe manner, with target output.
- Check that all the activities are being executed fulfilling project HSE requirements.
- Timely preparation and submission of Inspection Request as per approved ITP.
- Prepare Daily Site Report mentioning the progress, delays, resources requirements and submit to the Construction Manager/Project controls team
- Liaise with the QA/QC department for quality issues and for the closure of any Non-Conformance within the agreed time frame.
- Monitor the all the activities closely to avoid any Non-Conformances.

H. QUALITY MANAGER

Responsibilities:

- Reports to the Project Manager
- Support to the Project Manager to implement the PQP in the project
- Assist the Project Manager to develop site based procedures and implementation
- Conduct Quality site walk for activities at regular intervals and issue reports as per pre-specified activities' inspection plan.
- Conduct Quality audits as per the plan and maintain the audit log
- Conduct the factory inspections and coordinate with Engineer's QA/QC staff.
- Prepare the QA/QC report and submit to the engineer.
- Lead the team of quality inspectors in the project.
- Check activities on site and give input for quality production
- Conduct Method statement briefing on quality requirements prior to start of anyactivity
- Work in close coordination with the laboratory for day to day site work relatedtesting's.
- Conduct material inspections for onsite delivery and coordinate with Engineers staff forapproval
- Coordinate with Engineer/Employer QA/QC team for quality matters resolution on day to day construction activities
- Raise NCR (CAPAR) once when the activities are deviated from the project specifications and approved documents
- Check the calibration of any measuring equipment's used on site that has valid calibration certificate to use and maintain calibration log.

1. QUALITY ENGINEER

The Quality Engineer(QE) reports to the -QA/QC MANGER for quality functions and to the SPM/PM/PE for day to day project activities.

- The QE is responsible for assuring that requirements of the QMS are met. QE coordinates with the SPM for achievement and verification of project quality
- The QE directs the quality function as implemented by subcontractors on the project.
- The QE will carryout surveillance inspections and will raise Material inspection requests and Work inspection request .
- QE is also responsible for implementing and controlling quality related work instructions applied to activities within the office.
- Conducts internal audits as per the QA plan, as well as external audits of subcontractors and suppliers.
- The QE is responsible for approving vendors for external calibration in relation to control of inspection, measuring and test equipment and also for internal calibration.
- The QE is responsible for maintaining a log of Inspection requests, non conformance reports and for coordinating corrective and preventive action for control of non conformances.
- Related to the procedure for corrective and preventive action, the QE shall review any item requiring corrective action. QE review will determine if the item or condition meets criteria requiring preparation and issue of CAR. CAR log to be maintained by QE.
- The QE will log all client complaints.
- The QE inspects the warehousing and storage areas to verify compliance with specifications, purchase order and QC requirements related to material receiving, warehousing and material control.

I. Material Engineer

Responsibilities:

- Reports to the Project Manager.
- Liaise with the QA/QC Engineer on quality of materials/works.
- Assist the Technical Manager in preparing material procurement plan
- Arrange all material submittals ensuring compliance with the project specification
- Carry out the mix design preparation and validation for concrete and asphalt.
- Coordinate with Employer/Engineer/ITA laboratory for all testing of materials/works at site.
- Liaise with the Engineer's materials staff for resolving any issue at site with regard to the testing of materials and quality
- Conduct yard/stock pile Inspections and appraise the Project team and the Engineer.
- Provide support to the project team in field quality control of all materials and works and appraise the project management team on quality issues and corrective measures
- Ensure upkeep and maintenance of all test records in the project
- Prepare monthly reports on materials testing in standard formats.

J. HSE MANAGER

Responsibilities:

- Implement the HSE policy, plan, procedures and program of the project and other referenced requirements.
- Ensure that all the safety requirements are taken in to consideration in all stages of planning and execution of the project. Ensure the implementation of safety procedures by all personnel.

- Organize the site so that the work is carried out with minimum risk of injury to staff, and least damage and loss to materials and equipment.
- Make sure that all personal protective equipment (PPE), as called for in the program of T.ONE and the Clients, HSE Manuals and other applicable standards are available and issued for use as and when required.
- Ensure that first aid equipment, facilities and a trained first aider are available on all sites on which personnel are working, and that all staff is aware of the action to be taken in the event of an emergency requiring medical treatment.
- Ensure active participation/attendance during safety toolbox meetings by everyone involved with the project.
- Keep an up to date record of all information connected with accident prevention, injury reports and an analysis of accident trends to continually decrease the future accident rates.
- Ensure that all managerial staff of the Project Management team are aware of the safety requirements and are implementing the same during the project execution stage.
- Receive Internal Audit Program; decide if the proposed corrective action request is acceptable or not. Propose Corrective Action in case of acceptance. Give justification in case of rejection of the proposed corrective action request. Follow up audit conduction.
- Send for action and for cause determination of NCR or hazard, accident, incident or environmental aspect. Send for verification of action taken. Note the verification results. Review for cause determination and send for corrective/preventive action proposal.
- Record revision to program and inform concerned person. Review audit report and send to document controller.
- Identify the need for training and evaluate the training received for the employees in the section.

1. SAFETY OFFICER/ENGINEER

- Advise on the prevention of injury to personnel and on the prevention of damage to property, plant & equipment.
- Identify potential hazards on new contracts before and during the course of the works, notifying the site safety organization of these and any additional fire precautions that may be required.
- Conduct safety meetings with site personnel and subcontractors.
- Foster safety awareness in all tradesmen and supervisors
- Investigate further improvement in existing safe working methods.
- Investigate and advise on any legal requirements affecting safety, health and welfare.
- Ensure provision and use of protective clothing and equipment.
- Ensure suitability from a safety viewpoint, of new and hired plant and equipment, and validity of all appropriate test certificates.
- Collate and advise on any changes in legislation.
- Determine the causes of any accidents or dangerous occurrences and recommend means of preventing recurrence.
- Supervise the recording and analysis of information on injuries, damage and production loss, assess accident trends and review overall safety performances.
- Supervise the recording of all employees' safety training records.

- Have absolute power to stop work on site if they consider a dangerous situation exists or could exist and cannot be remedied immediately.
- Identify the training need and the competency factor of the site safety personnel.

K. Planning Engineer

Responsibilities

- Reports to the Project Manager.
- Develops and maintains the project schedules in relation to time, cost, and measurement of the project.
- Reports progress of all phases of the project.
- Formulates work breakdown structures and documents sub-contract packages, including estimates of man-hours and costs.
- Reviews daily reports to ensure direct labor efficiency.
- Ensures timely and cost-effective completion of site-based activities.
- Supervises the monitoring and reporting of progress, cost and efficiency values to management.
- Makes sure that periodic reports are transmitted to the appropriate persons.
- Attends client progress meetings as nominated.
- Interfaces with other supporting company systems.
- Progress reporting to the client including project status, payment and cash flow information and progress meetings.

L. Senior Quantity Surveyor (Sr. QS)

Responsibilities

- Reports to the Project Manager.
- Coordinate with Divisional Contracting team for all contractual matters that needs support.
- Support the project management team in all project related contractual matters.
- Study and Understand the Contract agreement.
- Support the Procurement Corporate/Divisional office in the subcontracting contract awards as per procurement plan
- Manage the preparation of the Monthly Progress Payment.
- Managing the preparation and submission of the Variation Orders.
- Liaise with the Eng. Dept. to asses any cost implications with regard to the RFI's.
- Review and advice with regard to the Incoming or Outgoing correspondence for any contractual issues.
- Coordinate with Engineer/Employer contracts teams in resolving contractual matters
- Review any subcontractors claim and work in resolving it.
- Responsible for submitting status reports as requested.
- Responsible for submitting the Final Estimated Project Budget.
- Provide necessary support for the Project Cost Control.
- Responsible for submitting the Monthly Financial Cost Report.
- Leading the EOT & Claim Process.

- Ensure contractual correspondences meet the contract requirements

M. Quantity Surveyor (QS)

Responsibilities:

- Reports to the Sr. QS.
- Study and Understand the Contract agreement.
- Support the Procurement Corporate office in the subcontracting contract awards.
- Manage the preparation of the Monthly Progress Payment.
- Managing the preparation and submission of the Variation Orders.
- Liaise with the Engineering Department to asses any cost implications with regard to the RFI's.
- Review and advice with regard to the Incoming or Outgoing correspondence for any contractual issues.
- Review any subcontractors claim and work for resolving it.
- Responsible for submitting status reports as requested.
- Responsible for submitting the Final Estimated Project Budget.
- Provide necessary support to the Project Cost Control.
- Responsible for submitting the Monthly Financial Cost Report.
- Assisting in EOT Claim Process.

N. Chief Surveyor

Responsibilities

- Report to the Project Manager.
- In charge of survey works covered in project.
- Review contract drawings/approved shop drawings thoroughly and understand the details.
- Check with technical department for clarity in shop drawings or for additional information
- Check the survey control points to maintain in good working condition. Ensure traverse survey is carried out and closed.
- Maintain all survey equipment's with valid calibration certificates at all times and in good working condition
- Establish good working relationship with the Consultant and Employer staffs at site.
- Follow the document control procedures and make the latest construction documents available for use.
- Conduct survey checks for works as per the RFA's made and ensure its approval from the Consultant. Maintain records related to approval/rejection of works and ensure resubmissions are made and approved.
- Act responsibly on NCR's, CAPARS raised by the Engineer/Employer and T.ONE QA/QC team. Implement the action plans within the shortest possible time.
- Ensure that as- built information are taken prior to covering the works
- Keep the field survey books, as built data safe at all times and hand over to superiors while away from project.

O. Administration

Responsibilities:

- Report to the Project Manager.
- Head the Administration, Human Resources, Labour and IT sections.
- Manage the administration of the Project's offices and other premises including the Consultant's office provided under the Contract.
- Manage the light motor vehicles in use in the Project.
- Manage the computers, IT accessories and network.
- Source and manage the employment of staff and workers.
- Manage the welfare of staff and workers including arrangement of accommodation, health-care, transportation, food and water, recreation, etc.
- Manage the application and processing of working permits and other statutory requirements.
- Manage the payroll of staff and workers.
- Keep and manage records of employees.
- Identify the training and induction needs of employees.
- Coordinate the evaluation of employees' performances with other departments.
- Ensure that provision of uninterrupted service facilities to the Engineer's site office.

P. Liaison Manager

Responsibilities:

- Report to the Project Manager.
- Establish, monitor and control all activities during the processing Permits, gate passes and Licenses
- Arrange NOC's from various authorities, government departments and consultants.
- Maintain tracking registers for NOC's and passes, update and ensure valid NOC's and passes are in place
- Ensure timely renewal of NOCs and permits as well as issuing the valid copies to the Construction Dept.
- Organize to interface with other package contractors and coordinate for smooth operations on site.

Q. Document Controller

Responsibilities:

- Reports to the QA/QC Engineer.
- Learn the Employer/Engineer document control procedures and document management systems and apply it throughout the project cycle in compliance with the IMS system.
- Responsible for receiving/issuing and registering the Incoming/outgoing letters or documents to/from external parties
- Responsible to ensure that all the outgoing documents have the proper reference numbers as per the control sheets.
- Responsible to register all incoming/outgoing technical submittals such as method statements, material submittals, document submittals.

- Maintain and update document registers including tracking of replies and identification of statuses.
- Ensure in maintaining the proper filing system of the project records in line with the company IMS system.
- Responsible for the proper distribution of letters and other project documents.
- Assisting the PMT in any administrative work.
- Assist to the QA/QC Engineer in implementing necessary documental requirements of IMS system.
- Maintain project files meeting the archiving requirements

R. Plant and Transport Manager

Responsibilities:

- Reports to the Project Manager.
- Lead and manage the store activities as per company's IMS procedure
- Arrange to deliver all materials on time in coordination with the procurement, Engineering and the suppliers
- Arrange to conduct preliminary checking of all materials delivered to site in terms of packaging, visual damages, documentation such as delivery note with all necessary details, tests/conformity certificates, Material Safety Data Sheets,
- Ensure that all materials delivered to site are inspected by respective discipline engineers/QA-QC/material engineer and approved by Engineer prior to issue to site.
- Material delivery, receive, issue records to be maintained and updated on a daily basis.
- Upkeep the store yard and stores in a professional manner following the QHSE requirements
- Protect the materials for construction following the manufacturers data.
- Appraise the project manager or Construction managers the material requirements in advance to avoid any obstruction for work.
- Ensure that traceability of materials delivered are available
- Maintain the stores records in traceable manner and update daily/weekly. Ensure no expired or non-conforming material issued from the store.
- Segregate any Expired materials or Non-conforming materials identified in the store/yard to designated quarantine area and dispose as per the manufacturer recommendation or agreed action with Quality control/HSE team.
- Conduct stock verification monthly and send reports to the Project Manager and stores in charge.

S. Store Keeper

Responsibilities:

- Reports to the Logistic In-charge and functionally to the Divisional Store Deputy Manager
- Lead and manage the store activities as per company's IMS procedure.
- Arrange to deliver all materials on time in coordination with the procurement, Engineering and the suppliers.
- Arrange to conduct preliminary checking of all materials delivered to site in terms of packaging, visual damages, documentation such as delivery note with all necessary details, tests/conformity certificates, Material Safety Data Sheets,

- Ensure that all materials delivered to site are inspected by respective discipline engineers/QA-QC and approved by Engineer prior to issue to site.
- Material delivery, received, issue records to be maintained and updated on a daily basis.
- Upkeep the store yard and stores in a professional manner following the QHSE requirements
- Protect the materials for construction following the manufacturers data
- Appraise the project manager or Construction managers the material requirements in advance to avoid any obstruction for work.
- Ensure that traceability of materials delivered are available.
- Maintain the stores records in traceable manner and update daily/weekly. Ensure no materials are expired in store
- Segregate any Non-conforming materials identified in the store/yard to designated area and dispose as per the agreed action with Quality control team.

APPENDIX E

INTERNAL AUDIT PROGRAMME

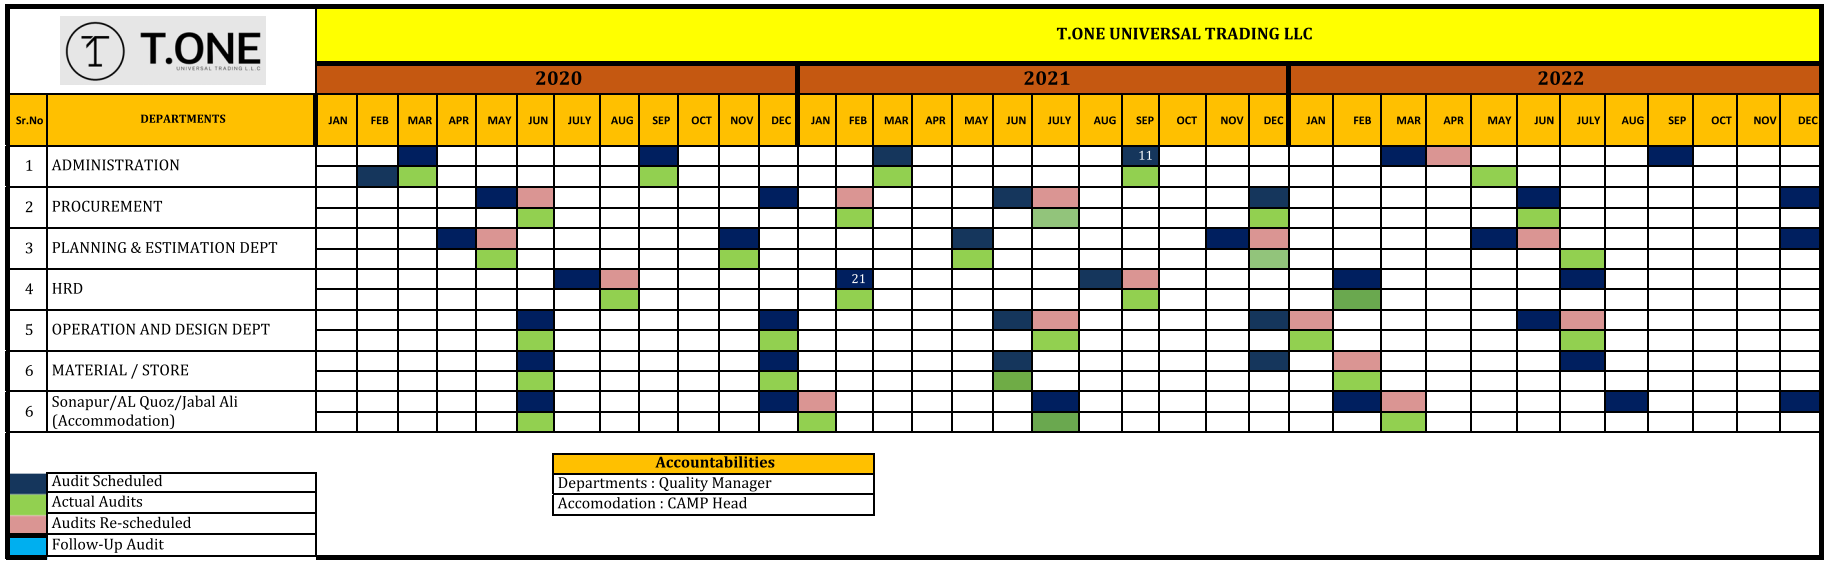

INFORMATION ONLY

APPENDIX F

STANDARDS, CODE, SPECIFICATION

For the Quality control procedures of the work the following codes and standards, specification shall be used, however if any dispute or additional codes applicable to the particular item it shall be used after Engineer Concerned approval.

- BRITISH STANDARDS (BS CODES)
- AMERICAN SOCIETY OF TESTING OF TESTING MATERIALS (ASTM)
- AMERICAN CONCRETE INSTITUTE (ACI)
- AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)
- SPECIFICATION OF PROJECT
- DIN (GERMAN INSTITUTE FOR STANDARDIZATION)
- BS-EN STANDARDS

T.ONE
UNIVERSAL TRADING L.L.C

HSE Manual

H S E MANUAL - INDEX

Sr.no	Names	Page nos.
1.	Scope , Objectives of Safety Plan and QHSE policy	3
2.	Terminology And Definitions	7
3.	Management Responsibilty	9
4.	Safety Responsibilities.	12
5.	Leadership and Adminisatration	15
6.	HSE Procedures	19
7.	Planned Inspection and Audit of the System	68
8.	Accident /Incident And Analysis,Reporting Procedure	70
9.	Personnel Protective Equipment	74
10.	Health and Medical Fitness	78
11.	Toxic and Hazardous Material Control	80
12.	Environment Protection	82
13.	Waste Management Plan	91
14.	Safety of Subcontractor Personnel and Equipments	109
15.	Equipment Control and Maintanance	113
16.	Emergency Procedures and First Aid.	115
17.	Evacuation Procedure	119
18.	Risk Management	123
19.	Permit to Work System	125
20.	Risk and Hazard Assessments	127
21.	Safety Training Requirements.	176
22.	Site Electricity Management Plan	179
23.	Housekeeping and Site Tidiness.	183
24.	General Safety Rules	185
25.	Project Safety Coordination Plan	188
26.	Site Fire Plan	190
27.	Transport to Buildings	195
28.	Site Traffic Management Plan	198
29.	Risk Assessment Log	200
30.	Forms and Formats	202

01. Scope , Objectives of Safety Plan and QHSE Policy

The scope of the plan covers the site activities of all abm staff and operatives, subcontractors, suppliers, and visitors. It also extends to the duty of care required to ensure that members of the consultants team, other contractors staff and the general public are safe guarded and protected from risks and hazards arising from the building process.

The Safety Plan Has Three Functions.

- To establish the safety management structure for the project.
- To define the responsibilities for each person having safety duties.
- To identify arrangements to minimise risk

***

QHSE Policy

At TONE UNIVERSAL TRADING we are committed to delivering excellence while ensuring the highest standards of quality, health, safety, and environmental (QHSE) management. Our goal is to enhance operational efficiency, safeguard our workforce, and minimize environmental impact through sustainable and responsible practices.

Our Commitments:

- **Quality Excellence**: We maintain structured processes, rigorous monitoring, and continuous improvement to exceed client expectations and uphold the highest industry standards.
- **Health & Safety Priority:** The well-being of our employees, contractors, and stakeholders is paramount. We implement robust safety protocols, conduct risk assessments, and provide regular training to ensure a secure work environment.
- **Environmental Responsibility:** We integrate sustainable practices, optimize resource utilization, and implement waste reduction measures to minimize our ecological footprint.
- **Regulatory Compliance:** We adhere to all applicable local and international regulations, continuously monitoring evolving standards to ensure full compliance across all operations.
- **Continuous Improvement**: We foster a culture of innovation and proactive enhancement, regularly reviewing performance metrics and incorporating stakeholder feedback to optimize processes.
- **Risk Management:** We identify, assess, and mitigate potential risks to ensure the safety, quality, and sustainability of our operations.
- **Employee Training & Development:** We invest in comprehensive training programs, equipping our workforce with the skills and knowledge necessary to uphold our high standards.
- **Transparent Communication:** We prioritize open dialogue with stakeholders, fostering trust, collaboration, and shared commitment to QHSE principles.
- **Sustainable Operations:** We implement energy-efficient practices, responsible waste management, and resource conservation strategies to support long-term environmental stewardship.
- **Proactive Safety Approach:** We emphasize hazard identification, regular safety drills, and preventive measures to ensure the protection of all personnel and assets.

This policy is communicated across all levels of the organization and regularly reviewed for continuous improvement. By adhering to these principles, TONE UNIVERSAL TRADING remains dedicated to delivering safe, high-quality, and sustainable solutions while fostering a culture of responsibility and excellence.

Date: 11 December 2025

Authorized signature

02. Terminology and Definitions

The terminology used in this manual have the following meaning unless indicated otherwise.

A) **Safe** : A situation is categorized as safe if its risks are known and judged to be acceptable.

B) **Accident** : An unplanned event which has the probability of causing personal injury or property damage or damage to environment.

C) **Incident** : All undesired events or circumstances including 'near misses having the potential to cause accidents.

D) **Hazard** : A condition with the potential of causing an accident.

E) **Risk** : The likelihood that a specified undesired event will occur due to the realization of a hazard by – or during work activities , or by the products an services created by the work activities

F) **HSE** : Health, Safety and Environment .

G) **PPE** : Personal Protective Equipment

H) Reference to site Supervisor implies the immediate supervisor on site, the Engineer , Forman or the Charge-hand , as applicable in a given situation.

***

03. Management Responsibility

The company management believe that pursuit of high standard of health, safety and a positive approach towards protecting environment is an integral part of efficient management in the construction industry.

The ultimate aim of the company management is to have accident free projects. To this objective , The following means will be employed:-

- All employees will be trained and made aware of the company ‘s HSE requirements and that of the project. The employees will Participate in all mandatory courses provided by the client
- HSE performance will be monitored throughout the project, the statistics will be reviewed and efforts will be made towards continuous improvement.
- All construction activities will be carried out using efficient and safe work practices – clear construction plans , method of work and safety guidelines.
- Hazard identification and risk assessments will be carried out on a regular basis and necessary control measures will be implemented. This will be done first on a project basis and once system measure, all activities will be subject to risk assessment.
- All candidates and incidents will be investigated and reported to management, client and where applicable, to the government authorities.
- Management would welcome all constructive ideas and suggestions towards improving HSE performance.
- Focus on incremental improvement on a continuous basis.
- HSE objectives will be established on a yearly basis, achievements highlighted and monitored.
- All necessary resources and support will be extended by management .
- The typical organization for management of health, Safety and environment issues is attached. Ref. HSE organization chart and company organization chart. Specific HSE responsibilities in projects are documented in the HSE plans developed for the projects.
- The brief responsibilities of key personal towards attainment of HSE Objectives are:-
  The general manager is responsible for all matters relating to health, safety and environment within the company. He delegates this responsibility to the HSE management Representative / HSE Coordinator, who is over all responsible for establishing, coordinating , monitoring and maintaining the health, safety and environment activities for all company construction projects.
- The HSE Management representative / HSE Coordinator is responsible to ensure HSE Documentation is valid, standard operating procedures are developed , HSE audits are conducted and advise mManagement of improvements required for effectiveness.

***

- Each Project Manager, is responsible for ensuring that the policy is effective and fully understood by on employee on his site. He is also overall responsible for ensuring the HSE Management system is implemented and all safety statistics are recorded and reported to the General Manager.

- The safety officer on site (or his designate) is responsible for the day-to-day safety inspections , Training and monitoring of the safety activities on the site.

- All employees are responsible to comply with the HSE policy of the company and all applicable client rules and regulations on the site they work. They shall report any unsafe acts and conditions and co-operate at all time which management to prevent accidents. They are also responsible to wear personal protective equipment, as issued to them and shall not misuse tools and equipment.

***

04. Safety Responsibilities

Safety Responsibilities *(CONTD.)*	
JOB TITLE	**SAFETY RESPONSIBILITIES**
Construction Manager / Asst. Cons. Manager	Responsible for the implementation of safety procedures by nominated and domestic subcontractors. Responsible for the day-to-day safety of all site operatives, the site and immediate environs and for the safe execution of the temporary and permanent works under his control. Acting upon the advice/ instruction of Construction Manager and Safety Officer regarding Health and Safety measures. Ensure that in-line supervision is instructed in the correct method to carry out operations. Instruct subcontractors work force in the correct method to carry out operations, to ensure the operatives carry out the works in a safe manner and without placing themselves at risk or endangering others. Ensure operatives are equipped with the appropriate personal safety equipment and that all equipment are used in safe condition with any necessary guards fitted. Ensure adequate and appropriate equipment is available / deployed to ensure safe working conditons.Institute correct housekeeping practices.
Sr.Proj.Engineer	Set personal examples to work force.

Safety Responsibilities *(CONTD.)*	
JOB TITLE	**SAFETY RESPONSIBILITIES**
General Foremen	Ensure adequate labour is assigned to specific tasks. Restrain employees from taking unnecessary risks, especially at height. Carry-out site staff and labourers tool box talk(weekly) and submit attendance sheet to Safety Dept. Ensure that all equipment is safe for use and is used correctly, especially safety harness and is within the safe working life period.
Storekeepers	Ensure that material handling (inwards and outwards) is carried out in a safe manner using correct equipment. Ensure that the stores layout provided meet the needs of the Project. Monitoring receipt of materials especially potentially dangerous goods. Ensure correct storage is provided / utilised To ensure that power tools and equipment are in a safe condition and are fitted with guards when issued to site. Any hired Equipment / plant etc. should have proper working instructions and safety certificates as required.
Male Nurse / First Aid Attendant	Ensure proper first aid treatment facilities are available at site with neat and clean and with open access. He will coordinate with site administration officer for emergency transport to hospitals and with procurement department for the purchase of first aid items.

***

05. Leadership and Administration

Introduction

Effective leadership and program administration are vital to the success of safety, health and environment –loss control program. Management leadership lays the foundation upon which a sold program is built and reflects management commitment in its implementation.

Policy Support

The management support to the 'COMPANY HSE POLICY' will be demonstrated by periodic letters and memorandums (or any other suitable medium) on HSE matters and the HDE policy would be displayed at prominent places in offices and sites.

Inspection Tours

Inspection Tours are conducted by the Genaral Manager / Asst Genaral ManagerProjects , The Construction Manager , and the safety officer at a frequency not less than listed in the table below. "The General Inspection Check list" rerf. From HSE-F-3, will be use to assist management in tour preparation and reporting of the same to the concerned site / safety officer.

Inspection Tours	Frequency
Genaral Manager	Every 3 months
Asst Genaral Manager/CM	Every month/Twice a week
Safety Officer	Once in a week

Group Meetings

The group meeting ensure the safety, health and environment topics are discussed during Management, Department site Meetings. Accident and Near Miss Incidents and the subsequent corrective and preventive action taken. The site supervisor along with the safety officer shall conduct group meeting every month. The number of meeting will depend up on the number of people working on any given site. Ref. From HSE-F-6.

HSE Audits

Planned audit of the system will be conducted at intervals defined by management and as per specific contract requirements. Ref. From HSE-F-7

Safety Awards

Safety Man of the Month Award and an award for reporting of Near Misses / potential hazards / new ideas will be used to motivate people and encourage and increase safety awareness on sites.

***

06. HSE Procedures

T.ONE UNIVERSAL TRADING LLC

HSE PROCEDURES

I N D E X

NO.	TITLE
1	General Safety Rules
2	Use Of Personal Protective Equipment
3	What To Do In An Accident/Near Miss
4	Driving
5	Equipment And Machinery
6	Compressed Air
7	Hand And Power Tools
8	Electrical Equipment
9	Compressed Gas Cylinders
10	Scaffolding & Ladders
11	Gas Cutting
12	Grinding
13	Pressure Testing
14	Cable Drum Handling
15	Cable Pulling
16	Cable Laying And Termination
17	Excavations
18	Working At Heights
19	Cranes And Handling
20	Housekeeping
21	Fire Prevention
22	First Aid
23	Environment Protection
24	Work Permit System
25	Welding & Cutting
26	Sand And Shot Blasting
27	Painting
28	Loading / Unloading Of Heavy Equipment
29	Fall Protection And Overhead Works
30	Employee Training and Communication

01. Always check your work area for possible hazards before starting work.

02. Always ensure that your equipment's and tools are in good working condition Replace any broken tools or equipment.

03. Are you working safely?

04. Remember you are responsible for your own safety and any other person that may be affected by your actions.

05. Continues to work safety even if your supervisor is not present.

06. If you are required to push for more production, you must increase your safety effort.

07. Observe all warning & notice signs.

08. Ensure that you receive a safety induction session when you first arrive on site.

09. Never Indulgence in practical jokes, horseplay, scuffing, wrestling or fighting the work place.

10. Never destroy or tamper with safety devices, signs and equipment or willfully or unnecessarily discharging a fire extinguisher.

11. Never use any equipment that you are not fully trained or authorized to operate.

12. .Never sleep in work place.

13. In oil fields smoking or carrying matches or lighters within restricted areas is prohibited. And site smoking areas shall be covered with a smoking permit.

14. In oil fields never take any prohibited items such as video, camera, alcohol, poisonous substance, knife or other weapon with you.

15. Never be afraid to ask or inquire.

01. All employee of the company will be issued with the appropriate personnel protective equipment. This is as standard, will include safety shoes, coverall, safety helmet and hand gloves.

02. Employees shall wear clothing suitable for the weather and working conditions. The minimum requirement for site work shall be a short sleeve shirt, long trousers, safety helmet and protective footwear.

03. Loose or torn clothing, tail top shirts, sandals or tennis shoes prohibited on the site work areas.

04. When you are instructed to conduct an activity that requires the use of additional protective equipment, this will also be provided by the company. This will include such equipment as safety harness, dust mask, eye glasses, ear protection, Wellington boots, rubber gloves, life jackets, etc.

05. Make sure that the PPE offers adequate protection for the job in hand.

06. Follow any special instructions for the use of PPE.

07. Keep your PPE clean & tidy and report any defects to your supervisor.

08. Wear ear protection when working in area where noise levels are above the 85db level.

Following protective gear will be worn –

Head Protection
Safety helmets must be worn in all areas expect areas devoid of skull injury hazards.
Hand Protection
Gloves of appropriate type and in good condition must be worn to prevent damage to hands.
Foot Protection
Adequate footwear which provides protection against crushing or contamination by dangerous substances will be issued. The footwear should have a spark-proof, corrosion resistant sole and heel providing a good non-slip grip.

Body Protection

For normal day-to-day work body protection such as overalls shall be issued. These are adequate to provide protection against dirt, grime, small oil splashes, minor abrasions and burs etc. standard blue overalls are to provided for all personnel.

For dealing with caustic, corrosive or acid substances the safety inspector shall issue a resistant suit.

Eye Protection

Eyes can be damaged by dust particles, fumes, liquids and certain types of light. Protection may take the form of:

- Shatter- proof spectacles
- Various types of goggles
- Face shields
- Various types of tinted glasses

Ear Protection

Protection against hearing damage must be worn in noisy areas. Noises do not have to be loud to be a hazard and any noise which causes discomfort or a bulling of the hearing is to be guarded against.

Wherever hear protection notices are displayed, personnel will wear hearing protection without fail.

PROTECTIVE EUIPMENT

Safety Belts Lifelines

Where a persons worksite is such that fall into the sea (ie, at marine terminals) or fall more than 2 meters and it is not practicable to provide fencing, safety nets or sheets, that person shall be issued with a suitable safety belt which, together with its lines, fittings and anchorages, is constructed to prevent serious injury to that person in the event of his falling.

Cont....

Any person entering a continued space where is a deficiency or oxygen, or which contains toxic, or noxious gasses, will be fitted with a safety belt and lifeline, in addition to breathing apparatus.

The free end of the safety line shall be under the control of a second person, safety positioned outside the confined space, who will keep the wearer under constant surveillance and ready to withdraw him immediately, should the necessity arise.

Line will be examined every three months, after operation use or drill and at other times as considered necessary.

Contractor will provide such suitable equipment to all their employees prior to entering the site, and at all times ensure that it is used as intended when working.
Should the job call for specific safety equipment e.g. breathing apparatus sets or special protective gears, these will be provided.

***

1. Any person who sustains or witness an accident or incident shall report the fact immediately to the supervisor in charge of this week.

2. All accident that result in damage to any vehicles, plant equipment or properly shall be immediately reported to the site supervisor.

3. All incident in which damage was prevented by circumstances or deliberate preventive action (near miss) shall be immediately reported to the supervisor. It is important that they are reported in order to prevent a similar recurrence that could result in a serious accident.

4. Remove the injured person from the scene of the accident, ONLY if a dangerous situation still exists.

5. Always memorize the area emergency telephone number.

6. Remember your action in the event on an accident may save someone's life.

7. When an accident occurs, always stay claim. Raise the alarm get medical help IMMEDIATELY. If trained, give first aid to the injured person.

8. .REMEMBER for every

1	MAJOR ACCIDENT , there are
10	MINOR ACCIDENT , there are
30	PROPERTY DAMAGES , there are
600	NEAR MISSES

To prevent Major accident , therefore
Don't Hesitate to Report any Near Miss

***

1. All company employees who drive a motor vehicle on UAE shall be in possession of driving license valid for the class of vehicle they are driving.

2. Every driver shall familiarize himself with the UAE Traffic regulation, Traffic signs, Speed limits and shall be observed.

3. Vehicle being Used to transport personnel shall be fitted with hand rails and seats.

4. Personnel are forbidden to sit on body sides on the gate or standing in a vehicle is in motion.

5. If you are carrying goods ensure that they are properly manifested, labeled packed and secured.

6. Engine of vehicle shall be stopped before fuel loading or discharging Takes places.

7. When tripping your lorry make sure no is behind first.

8. Never use dampers or excavating equipment for carrying passengers.

9. Every vehicle accident shall be reported immediately to the police authority and company safety officer.

10. If the emergency alarm sound while you are driving , stop, switch off the engine and reported to the nearest marshalling point.

11. Never park your vehicle near fire hydrants or fire point.

12. In the event of an accident , it is the drivers responsibility to.
    - Ensure the vehicle is not moved.
    - Contact traffic police.
    - Contact company safety officer.

***

1. All equipment's shall be operated, by fully trained and authorized persons.
2. Engine of equipment shall be stopped before refueling.
3. The operator of equipment and machinery will ensure that safety equipment provided with the equipment or machinery, is utilized and maintained. Never remove any guard protection from equipment.
4. The of any equipment or equipment or machinery, will ensure that equipment or machinery that he is using, is properly serviced fueled, oiled, and cleaned as required. He will report any problems with the equipment or machinery to his supervisor or machine. IMMEDIATELY it become apparent.
5. The operator of equipment or machinery, will ensure that his action will not endanger the safety of other persons working nearby.
6. Approved correct P.P.E shall be worn by operators and assistants when using the equipment or machine.
7. Keep emergency stop button clean and unobstructed at all times.
8. Learn how to stop the machine in an emergency.

***

1. Air hose connection shall be secured to prevent hoses from whipping under pressure due to accidental separation.
2. Shut off the air supply and bleed off the pressure before disconnecting the hose.
3. Always use the proper hose connectors, never use jubilee clips
4. Never use the compressed air.

***

1. Use the correct tool for the job in hand , never use a spanner as a hammer.
2. Use spanner that fit the nut or the bolt head properly.
3. Keep your hand behind the cutting edge when using cutting tools.
4. When using rotating power tools such as grinders and circular saws , the operator will ensure that all other persons working in the same area as he is working, are not affected by the noise ,Pollution or eye hazard that is action may cause. Screens will be erected as required. The operator must be aware of his surroundings when operating power tools.
5. Keep your tool in good condition and stored properly after finishing work.
6. Report any damage or defective tools to your supervisor.
7. Were the suitable protection when using power tools.
8. Store tools , cable and hoses in a safe and tidy fashion.
9. Never lift a power tools by their cables or hoses.
10. Guard the circular saw and push stick to cut the same small pieces.

***

01. Electrically powered equipment shall be grounded at all times when in use.
02. Keep switch boards access clear at all times, in case isolation is required in an emergency.
03. Only fully trained persons may use electrically operated tools.
04. Never place material or construction items in front of electrical switches or upon electric cables.
05. Switch off the switch before removing or inserting the plug.
06. Operating switches or levels that require constant manual pressure to activate power tools shall not be tampered with or modified in order to make the tools easier to operate.
07. Keep scaffolding poles, crane & ladders well away from overhead wires.
08. No unauthorized person's shall temper with electrical installation, only authorized and qualified electricians shall repair, adjust or install electrical equipment's.
09. Never jump wires in sockets with matches stick or nails.
10. Only approved types of electrical extension cables shall be used on the site.
11. Welding cables shall be terminated and sliced in a proper manner.
12. Report any broken, ineffective or damaged electrical equipment to your supervisor and ensure that no one can come into contact with such equipment until it is repaired.

General Safety Precautions

The need for electrical isolation of equipment or a section of line will be determined by the Electrical Engineer.

Work on either low-tension or high tension systems must be carried out in conformance with the work permit procedure and the electrical isolation permit.

The following safety precautions will be observed:

a) All electrical installations must conform to the relevant safety standards, and all machinery and equipment must be effectively earthed.
b) All electrical work must be done by suitably qualified electricians.
c) Electrical cables must be adequately insulated and protected against mechanical damage.
d) The condition of the insulation between live/neutral and live/earth conductors, and the resistance of the earth circuit shall be checked at last once a year.

e) Circuit breakers and fuses must be correctly selected. Fuses must be inserted in the live conductor and replaced, when reputed, by another of the same rating but only after determining and rectifying the cause. The operation of circuit breakers should be checked regularly. A fuse must never be inserted in the neutral conductor.
f) All electrical apparatus must have adequate air circulation around it to prevent overheating.
g) Checking by touch to determine whether a motor or generator is running hot must only be done with the back of the hand. In case of shock, the hand is then thrown away from the machine.
h) In zone I hazardous areas all electrical apparatus must be intrinsically safe, pressurized or flameproof.
i) Portable electrical appliances should be all-insulated or double-insulated and must be inspected at least weekly.
j) Working live lines must be avoided wherever possible. If it is absolutely unavoidable only electricians trained to work in maximum safety under rubber boots and gloves shall be permitted using rubber mats and insulating screens.
k) All electrical equipment, insulated tools, rubber gloves, mats and screen must be inspected and tested at regular intervals and replaced if damaged or faulty.
l) The contractor is responsible for the safety of his electrical installation. Inspection must be carried out by an authorized competent electrician assigned by the contractor.

Electrical Equipment in Classified Area

To establish degrees of explosion and/or fire hazard which could be caused by the use of electrical equipment in certain areas, the areas are classified and sub-divided into divisions according to the degree of probability of the presence of a dangerous atmosphere. They are interpreted, with particular reference to the hydrocarbon industry, in the institute of Petroleum Electrical Safety Code.

All equipment used by the contractor in classified areas will have a certificate of approval for use in these areas. Certificates are issued by a recognized authority after testing the equipment. Before certified equipment is used for work in a classified area it has to be inspected and approved by a competent electrical authority.

Cont…

Portable Electrical Equipment

Care will be taken to ensure that the contractor's portable equipment is safe to use, as it is a common cause of electrical accidents.

All portable equipment and tools must be run if possible, at 110V and must be provided with plugs and sockets which are not capable of being used on 240V supplies.

Portable equipment, unless double insulated, must be earthed, by using flexible supply cables incorporating an earth continuity conductor.

All insulated equipment which has no external metal work should be used where possible, especially in confined work areas.

Double insulated equipment which has an additional metal or plastic casing insulated from any conductor does not require earthling and is recommended for safe use.

All potable electrical equipment, leads and earth wires will be inspected and tested regularly in accordance with the latest approved procedures by the contractor.

Care will be taken not to overload sockets-
Portable electric tools must be used only on the correct power supply as instructed on the marker's label. They must not be connected to a lighting socket.

The number of connections from a socket is restricted by the current rating of the circuit. The total value of current taken from the circuit must not exceed the value for which for circuit was designed.

***

01. Compressed gas cylinders shall be stored in upright position, protected from heat, direct sunshine, secured from falling and from being struck by moving equipment and shall be capped at all time.
02. Oxygen and fuel gas cylinder shall be separated and clearly marked.
03. Never test for leaks with a flame, use soap water.
04. Full, empty cylinders should not be stored together and such cylinder shall be marked “empty”
05. Cylinders employed on welding/ burning operations should be fitted with flash beck arrestors and secured in the upright position on appropriate trolleys.
06. Never lift or carry cylinders by handing their valves or fittings.
07. Never use pressurized equipment as a step or support.
08. Never apply heat or welding to equipment under pressure.
09. Gas torches and hoses must be removed immediately after complete work in a confined space.

Storage

All gas cylinders shall be inspected on delivery and no cylinder shall be accepted it is defective or damaged, not painted for identification with contents named in Arabic and English or if the valve protection cap is missing.

Gas cylinders will be stored in a safe, dry, well ventilated store prepared for this purpose. Storage shall be planned so that the oldest cylinders are used first.

Cylinder will be stored horizontally, preferably on racks. Acetylene and other liquefied fuel gas cylinders shall be stored upright with the valve at the top.

Flammable gases will be stored at least 50 feet (15.24 meters) from any other building. Firefighting equipment shall be readily available and NO SOMKING notices posted.

Different gases may be stored together only when it is known that it is safe to do so. Oxygen cylinders shall never be stored near any flammable gas cylinders.

Toxic gases shall be stored separately and respirators readily available in case of leakage.

General Handing

Cylinders shall not be off-loaded from vehicles by rolling and allowing them to fall to the ground. Cylinders shall not be rolled or dragged along the ground.

Cylinders shall not be used as rollers, supports, or for any other purpose.

Cylinder transported on vehicles must be properly secured to prevent them rolling or banging together, and the valve protection caps must always be fitted.

Empty cylinders shall be identified by larking with chalk and checked for damage before returning to suppliers.

Empty cylinders shall be handled with the same care as if they were fully.

Oil or grease must not be allowed to come into contract with the valves of oxygen cylinders. Oxygen reacts violently with even traces of petroleum products.

Always keep the metal cap in place to protect the valve when the cylinder is not I use; a blow on an unprotected valve may cause gas under pressure to escape with resulting injury to personnel and damage to property.

Charged cylinders are not designed for use when temperature exceeds 54º C (130 º F) they should therefore never be stored or used near sources of heat or near highly flammable substances.

Because of their shape smooth surface and weight, charged cylinders are very difficult to handle by hand, a two-wheel cart should be provided to move them about.

Do not remove the identify tag, or any number or marks stamped on cylinders.

When compressed gas cylinders must be handled by a crane or lifting device, as may be the case on an elevated construction or maintenance job, they should be lifted one at a time using a cradle or similar device and extreme care taken to make certain they are not dropped.

Never tamper with the valve or safety device on a gas cylinder.

Make certain that the threads on regulator, union, or connection to the cylinder valve outlet corresponds with each other, if not, do not attempt to force the connection. Only experienced, qualified and knowledgeable persons are authorized to connect regulators and supervisor the installation of compressed gas cylinders.

Compressed gas cylinders used by contractor personnel must be provided with a holding bracket or chain and base plate to secure the cylinder properly at the location of use. Sufficient facilities shall be provided for the required number or cylinders.

Before making a connection to the cylinder valve outlet it should be examined for dust or dirt. On cylinder where it is safe to do so, the valve may be cracked open for a second to clear away any dust or dirt from the outlet. On other cylinder the outlet shall be cleared out using a clean, dry, lint-free cloth.

Caution:

Due to the wide explosion limits of hydrogen gas it is not safe discharge a hydrogen cylinder in this way.

Compressed gas cylinders should never be used without a pressure reducing regulator fitted to the cylinder valve outlet, unless the cylinder is properly connected to a manifold with a regulator fitted to each outlet from the manifold. Proper piping downstream of the regulator must be fitted.

Always open a compressed gas cylinder valve slowly. A cylinder not provided with a hand wheel valve should be opened with a suitable key.

Unless the cylinder valve has been tightly closed, never attempt to stop a leak between the cylinder and the regulator. The same applies to leaks down stream of the regulator.

Never use any compressed gas for any purpose other than that for which it is intended.

Users of Gas Cylinder

All personnel involved in the handing, transportation or using of compressed gas cylinders must be thoroughly familiar with and observe the rules and regulations contained in this section.

Those responsible for the use of compressed gas cylinders should make certain, before connecting the cylinder to the system, that the gas content of the cylinder to be used corresponds with the identity tag and is the correct gas for that job.

When in use, compressed gas cylinder should be in an upright position, unless instructions specify otherwise, and the cylinders should be properly secured. When not in use the cylinder shall be collected by the stores representative within 24 hours.

When an empty cylinder had been replaced, the empty cylinder should immediately be marked with chalk and the return procedure commenced. When contractor must ensure that the empty cylinder is collected by the stores representative within 24 hours.

***

1. Any activity that cannot be performed safely from a ladder or hop up platform, will be conducted from approved scaffold .

2. Only approved scaffolds, erected by qualified person shall be used.

3. Do not use barrels , boxes ,brick and other Unsafe substitutes as scaffolding.

4. All scaffolds more than 2m high shall be fitted with hand rails and toe boards on all Exposed sides and ends.
5. Earth leads for welding shall never be attached to scaffolding.

6. All scaffold will be kept free of rubbish and unnecessary material, No material will be stored up on the scaffold ,unless the scaffold is designed and adapted to accept stored material.

7. Always tie access ladders to the scaffold at suitable location. Never climb up Scaffolding, always use the ladder provided. Ensure the ladder is in good condition and Is of sufficient length required.
8. Tools or other equipment shall be carefully lowered and not throw down from a height.
9. No person shall work in scaffolding before checking by a competent person.
10. Never use any incomplete or uncertified scaffold.
11. Ladders must extent at least Iam above the landing or work place.
12. Never use home made or defective ladder.
13. Get a collogue to foot the ladder while you lash the head.
14. Use your both hands to climb the ladder, Use a hoist line to lift material or tools.
15. Don't stand ladder on loose material or learn it against fragile material.
16. Avoid using a ladder at locations near doorways or places where person pass through Frequently .
17. Where situation require, the use of a safety harness will b employed.

See scaffolding procedure attached

SCAFFOLDING PROCEDURE

1. General requirements

Scaffolding shall be provided and maintained in a safe and reliable condition, In areas,
Where work cannot be safely done at ground level or from part of building or other permanent structure.

Scaffolds shall be erected by suitable trained and experience personnel under the supervision of the foreman. Each scaffold shall have a unique number.
Only materials, specifically designed for scaffolding and in good condition shall be used.
Where scaffolding is incomplete a prominent notice 'not for use' hall be displayed.
Scaffolding shall not obstruct escape routes or access to any safety / emergency equipment.

1 Scaffold Certification

All scaffolds shall be inspected on completion and after every alternation, by the foreman Whom shall inspect the scaffold check-list .HSE -11-01,If acceptable, he shall sign and Certify the scaffold as safe for use. A green color 'safe for use' tag will be put on the Scaffold If not acceptable , the scaffold is re inspected after rectification's are done. If For any reason the scaffold is un safe for use ,the scaffold is suitable tagged. " UNSAFE SCAFFOLD – DO NOT USE'

Every scaffold shall be re inspected and re – certified on a weekly basis. Records of inspection made shall be recorded on scaffold inspection register. The site engineer / safety Officer shall ensure that this weekly inspection is done and the register is up to date.

2 Scaffold Construction

- Scaffolding shall be constructed using proprietary metal systems, Including accessories such as couplers and clamps and shall conform to BS 1139 (Metal scaffolding)and to BS 2482 (Timber boards)or equivalent. All scaffolding material shall be checked to ensure That they are free from defects an that the fitting are well lubricated.

- Scaffolding shall be constructed in accordance with BS 5973 & 5974 – Codes of practice For scaffolding ----------

- Scaffolding shall be securely supported an braced ensure stability. Unless constructed as Independent scaffold , all scaffold shall be rigidly connected to the structure.

- All free standing tower scaffolding shall be guyed or tied every 6 meters. If less than 6 meters (20 feet) the height shall not exceed three times its minimum base dimension . Working platforms and decking shall conform to the guidelines as indicated in Appendix A and B.

3 Use of Scaffolding

- No person shall work on a scaffolding with out checking that it is in safe condition, and That a safe for use tag is available on the scaffold.

- Scaffolding shall be used only for its intended purpose. It shall never be overloaded or Extended for any reason whatsoever.

- Where necessary, where hand rails may have been removed , safely harnesses shall be Worn by the person using the scaffold.

- Appropriate Personnel Protective Equipment shall be worn at all times.

- No person other than the designated personnel or the foreman is permitted to carry out Any modification on the scaffold. In this case , are certification of the scaffold is necessary. see section 2.

***

a) Ensure the area is clean and free from combustible materials before starting welding / flame (gas) cutting.

b) Ensure that the site location is free from hazards and obstructions prior to start the job.

c) Screen the cutting area adequately to avoid the spreading / ejection of sparks.

d) Use dust mask and safety goggles while cutting.

e) Avoid loose clothes while doing cutting. They may entangle with the moving parts.

f) Use appropriate PPE like safety helmet, safety shoes, hand gloves, dust mask etc while working.

***

a) Ensure that the site location is free from hazards and obstructions prior to start the job.

b) Screen the cutting area adequately to avoid the spreading / ejection of sparks.

c) Use dust mask and safety goggles while cutting.

d) Avoid loose clothes while doing cutting. They may entangle with the moving parts.

e) Use appropriate PPE like safety helmet, safety shoes, hand gloves, dust mask etc while working.

***

a) Barricade the area while doing pressure testing with proper sign boards.

b) Ensure the flammable materials like adhesives, paints, sealants, and insulation are stored away from the electrical and fire hazards.

Use appropriate PPE (safety helmet, full body harness, safety shoes, etc) while working in the site

***

a) Ensure the location in the site and the access to location if free from hazards for shifting and stacking of cable drums.

b) Check the condition of slings used for rigging the cable drums.

c) Cable drums should be stored on flat surface and secured with wooden wedge stoppers to avoid movement.

d) Cable drums should be stored away from the electrical and fire hazards.

***

f) Check the condition of stand and spindle on which the cable drum is mounted for cable pulling periodically.

g) The location at which the cable pulling is conducted should be free from obstacles.

h) Cable rollers to be used for large cables for ease & safe pulling.

i) Check the condition of the scaffolding (platform, toe boards, guard rails, etc).

j) Lock the casters before mobile scaffolding before climbing the scaffolding.

k) No person shall be on the scaffolding while shifting it from one place to another place.

l) Use full body harness while working on the scaffolding and anchor it properly.

m) The height of the scaffolding shall not be four times the smallest width of the scaffolding if exceeds use outriggers.

n) Use appropriate PPE (safety helmet, safety shoes, heavy duty hand gloves etc.) while working in the site.

***

a) Check that the cable trench is prepared or cable tray / duct installation is done as per the routing shown in the approved construction drawing.

b) Check whether the tray installed is properly supported for the cable installation at high level.

c) Ensure that the length of the cable to be laid is measured correctly.

d) Check the scaffolding / platform / ladder arrangement are safe for high-level work.

e) Ensure that cable is laid in tray / trenches by using cable rollers.

f) Ensure the cutting edges of the cables are covered / protected properly during installation and after installation.

g) Marking shall be done at both end of the cable for identification.

h) Ensure the cable installed on cable tray is tied by using nylon cable tie at a distance of 500mm for vertical installations and 1000mm for horizontal installations.

i) Ensure correct spacing is provided between the cables when multiple cables are laid side by side.

j) Check cables are bent, providing the required bending radius in line with manufacturer's recommendations.

k) After installation of the cables they are to be tested for insulation resistance and continuity.

***

01. Any excavation work, irrespective of depth shall be covered by a permit from area authority prior to start.

02. Any excavation work will be protected by a barrier, and suitable notices, to stop persons accidentally falling into excavation, as well as to clearly identify that an excavation exists.

03. Any excavation 1m or more in depth, a proper access shall be placed to provide both routine and emergency exits from the excavation.

04. Excavation material shall be stored 1m from the edge of the excavation.

05. Excavations and trenches 1.5m or more in depth shall be shored or slopped in any approved manner, to avoid edge collapse.

06. Do not excavate or work in an excavated pit or trench during or directly after a heavy rainfall.

07. The supervisor must inspect the excavation regularly, to assess any potential dangers or safety precautions that may be required.

08. Always employ a bank man on top of the excavation, in case of an emergency. This bank man will ensure that persons within the excavation are not injured by accidental tipping of materials or collapse of the excavation sides.

***

01. Any person who must perform an activity at height, must ensure that he is utilizing the required safety equipment. Where he may be required to stretch over a shutter, or work outside the scaffold area, a safety harness will be worn and tied to a secure section of the scaffold or structure.

02. When working over water, life vests must be worn.

03. Ensure that tools and material are not dropped when working or moving at heights. Always carry tools in a suitable bag. Ensure materials are safety stacked and will not blow or fall over

04. Never throw tools or material to the ground.

05. Always wear suitable foot wear when working on roofs other surfaces that may be slippy.

***

01. Only authorized, trained employees are allowed to operate cranes.

02. Capacity plate and safe working load shall be attached to all crane and clearly marked.

03. Cranes shall not be operated without a safe load indicator

04. Crane operators shall only take signals from properly trained signalman.

05. Never leave the controls of a crane unattended when a load is being suspended.

06. Never guess the weight of a load to be lifted, if in doubt ask you supervisor.

07. No employee shall be permitted to ride the crane hook or load.

08. Always ensure that other persons do not walk under a suspended load.

09. Rigging equipment shall never be overloaded or misused and shall be stored properly after use.

10. Always make other person in the same work area, aware that you are conducting lifting operations.

11. Never conduct lifting operations in heavy windy conditions.

See attachment – Loading / Unloading of Heavy Equipment

***

1. A well maintained and tidy work place decreased the risk of accidents, injuries and fires.
2. Waste material shall not be permitted accumulate and shall be removed to a designated dumping area at the end of the working day.
3. Keeping access ways and emergency exits clear and easily visible at all times.
4. All no smoking areas, gas cylinders flammable storage areas shall be kept clear of rubbish at all time.
5. Spilled oil, grease or other slippery substances in working areas shall be cleaned up immediately or the affected area cordoned off and sprinkled with enough dirt or sand to absorb the eliminate slipping hazards.
6. Never leave hoses, wires, ropes and electric cables where people could trip over him.
7. Remove or bend protruding nails or objects.
8. Stocks goods & materials neatly so that they have no chance of falling.
9. Leave sufficient space between stack to act as gangways.
10. Help to keep the site tidy, good house keeping prevents accidents.

***

1. When you arrive on site or when you change from one site to another make sure that you know the location of the following:

    - Fire aid box
    - Fire alarm
    - Fire & emergency exits.
    - Marshalling points

2. Learn which fire extinguisher you should use for the different types of fire.
3. Keep clam in the event of fire, panic cause disaster.
4. Practice good house keeping at all times.
5. Do not smoke in " No smoking Area"
6. Familiarize yourself with the fire procedures and where to go and to do in case of fire when the alarm is sounded.
7. Any defects or missing extinguishers shall be reported immediately to your supervisor.
8. Ask the safety officer or your supervisor, to explain the procedure to be followed in the event of a fire.
9. When emergency alarm sounds, switch off all running machine and reported to the nearest marshalling point.
10. I you discover a fire , raise the alarm. If it will be safe for you to tackle the fire, hen do so without putting your safety risk, if not, evacuate your work area according to the emergency procedure.

***

1. All accidents, however minor ,must be reported Immediately to your supervisor.
2. Ask your supervisor , what first aid arrangements are available for the site you are working on.
3. Learn how to give basic first aid:-

   - Always keep the injured person warm.
   - Apply pressure to a bleeding wound , if the injured person is bleeding. Use clean piece of cloth as a dressing.
   - Check to ensure that the injured person is breathing and that his throat (airways) is not obstructed.
   - Never move an injured person in case further injuries, unless dangerous situation Skill exits.

4. Always ensure that some body has gone to raise the alarm and summons expert medical help.

***

1) All T1 employees to exercise better awareness to environmental issues as reflected in T1HSEMS.
2) Employees are to take the necessary precautions/action to prevent adverse effects to the physical environment.
3) Where possible segregate the waste in source for recycling.
4) Minimize waste of paper by using paper on both sides.
5) Always keep in mind the following : **REDUCE – REUSE - RECYCLE**

***

A written work permit system procedures and formal actions to ensure that non-routine, potentially hazardous activities are carried out as safely as possible.

Depending upon site conditions and contact, a work permit will be required for all jobs carried out by contractor or his subcontractor, the conditions of which will be strictly complied with all times.

Types of non-routine work for which work permit procedures are normally operated include maintenance and repair, inspection, testing, alteration, construction, reconstruction, dismantling, adoption, modifications and cleaning.

Cold work permit

For any work that does not involve equipment or materials, producing flames or heat or classified as a source of ignition.

Hot work permit

Is either

The performance of work where heat is used, generated or applied and of such intensity as to cause ignition of any combustible or flammable materials.

The use of non flame proof equipment or work that may cause sparks in a hazardous area according to the zone classification of the sit

Mobile vehicle/machinery entry permit

This procedure permits entry to the site of vehicles and mobile machines, other than authorized site vehicles. The procedure provides control of the conditions of entry to eliminate any hazards that may be caused by their presence.

Excavation/Road closure permit

The purpose of the excavation/road closure permit is to ensure the safety of personnel carrying out excavation and to prevent damage to any underground services.

***

Contractors must ensure that welding, cutting, burning, brazing and soldering work is carried out under the conditions of the DHCC work permit system.

Welding on directorate facilities and equipment must be carried out by contractors qualified welders, certified by DHCC concerned department.

Hazards from welding are the dangers of fire and possible danger to health from fumes and from ultra violet and infra red light.

The contractor must make sure that the work area is safe. Some of the precautions to be taken by contractors include:

a) Always obtain permission before welding or cutting.
b) Position fire extinguishers in an accessible position near the welding equipment.
c) Remove all combustible material from the vicinity, if not possible cover with fire resistant material.
d) Clear the work area and cover wooden floor with fire proof mats.
e) Erect fire-resistant screens round the work area to stop flaying sparks.
f) Keep personnel away from the vicinity.
g) Ensure adequate ventilation.
h) Use appropriate eye protection and protective clothing.
i) Keep hoses and welding leads as short as practicable, do not let them obstruct walkways or become tangled or knitted.
j) Never put welding gas cylinders into a confined space.
k) Welding or cutting is not normally permitted on tanks or vessels containing flammable or unidentified liquids.

Personal Protection

Welder's overalls should not have any pockets, or` turn-ups' on the trousers, where sparks could be caught.

Leather or other flame-resistant aprons give additional protection against heat, sparks and flames and must always be worn while welding.

Caps or shoulder covers made of leather or other flame resistant material must be worn when welding is to be done above head level.

Eyes must be protected by well-fitting goggles fitted with the correct filter glass. Goggles must be used by welders and other persons working with welders even when wearing helmets and screens. The screens can then be lifted if necessary.

A welder must always use a helmet type protector or handle-shield type protector which covers and protects his eyes and head.

Hands must be protected by flame resistant gauntlets which come higher over the sleeve.

Fire resistant leggings or high boots must be used for heavy work. For light work safety boots were reinforced toes must be worn.

Breathing apparatus will provide protection from noxious fumes in all places where ventilation in poor. It must be used when working in confined spaces.

***

Hazards and Precautions

The abrasive material used in sand and shot blasting and the particles generated by the process are a serious health hazard both to the operator of the equipment and to other persons in the area.

The regulation safety equipment must be worn when operating the equipment.

Noise is also a hazard when sand or shot blasting is in progress. This can affect the operator and other persons in the area.

The recommended ear protection must be worn by all persons in the are who could be affected.

The nozzle of the equipment must be fitted with a shut-off control of the dead man type. This is essential to reduce the risk of injury to any persons in the area should hose be accidentally dropped.

The nozzle of the equipment must be electrically earthed (grounded) to prevent a static electrical charge from developing.

***

All flammable material shall be cleared from the area before commencing flame cleaning.

Cartridge respirators shall always be worn during flame cleaning.

Flame cleaned surfaces must be allowed to cool to ambient temperature before carrying out solvent power wiping or planning.

The required protective clothing and equipment must be worn during sand blasting or when using power operated hand tools.

Adequate ventilation in necessary during flame cleaning, solvent wiping, paint spraying and the opening of solvent containers and mixing paints.

Forced ventilation must be used in confined spaces.

Barrier creams should be applied to the skin to provide protection against paints and solvents.

Adequate washing facilities must be readily available.

Great care should be taken when using airless spray painting equipment. The airless spray gun operates at very high pressure and the ejected paint can penetrate the skin or cause serious eye injuries. Protective overalls and protection should be worn.

Strong degassing solvents cause skin burns by removing the natural oil from the skin. Alkaline catalysts used in some epoxy paint systems and caused chemical burns if not washed off immediately. Protective gloves should be worn when handling these chemicals.

Paint must be stored on racks in a safe, secure place under proper supervision. Smoking or naked lights are not permitted inside any paint store. Fire extinguishers must be provided inside and out side the store adjacent to the entrance.

***

1 Preliminary Requirements

Following precautionary measures are to be taken before commencement of any Loading/Lifting. Unloading and transportation activity.

a) Responsible Foreman/Supervisor with knowledge and experience of supervising such activities. He is to be present on site during the operation and full responsibility of executing the works in a safe manner will be his.
b) Availability of a telephone on site and availability of important telephone numbers – ambulance, fire, police, including contact numbers of executive managers.
c) Availability of a car/vehicle and a driver.
d) Availability of first aid box/stretcher.

Information should be given to the following informing about the activity to be carried out.

a) Head Office, addressed to the Construction Manager
b) Project Manager of the concerned site.
c) Stores.

There should be at least two skilled personnel, with previous experience in such operations, who should be allocated for this activity.

Only authorized personnel are allowed to operate cranes, lifts or any other equipment, which requires skill and knowledge of the equipment they are handling.

2 Lifting and Unloading Operations

Before any loading/lifting and unloading operation can take place, the supervisor should ensure that all lifting tackles, chains and the crane itself are in good working condition. Consequently, the weight of the items being lifted should be known, so as to not to exceed the safe capacity of the lifting crane.

Preferably, the crane utilized for the operations, should be certified as safe for the specified load by some competent authority.

It must also be known, where the heavy piece of equipment is to be unloaded and any associated constraints associated with the place.

The lifting crane should be positioned and fixed firmly in optimum position, so that the crane operator has a direct view (as far as possible) of the unloading area and the items being lifted /unloaded. When it is not possible, the supervisor/foreman should stand in direct view of the crane operator and should use known/conventional signals to the crane operator.

All personnel involved in the operation should be wearing their personal protective equipment, like helmets (hard hats), safety shoes, coveralls and gloves.

After hooking the slings/attaching hooks the personnel should stand behind in safe position away from possible swings and injuries.

***

Fall Protection and Overhead Works

This is typical procedure as used at Buildings & Villa Apartment Project. It should be reviewed for specific application and finalized / approved before implementation.

FALL PROTECTION & OVERHAD WORKS

1.0 OBJECTIVE

To provide the minimum safety requirements for personnel working on high structures.

2.0 SCOPE

This procedure applies to T1 and sub-contractor personnel assigned to work on high structures or areas where there is danger of falling.

For the purpose of this procedure:

Any work carried out 2.0 meters above the ground or upper floor levels shall require proper scaffoldings.

Personnel assigned to work on scaffolds or near the edge of upper floor shall wear fall protection safety equipment.

3.0 REFERENCES

- **Federal law 8/1980**
- **Local order 32/1982**
- **DM code of construction safety procedure**
- **Trakhees – Guidelines**
- **Al Sa'fat - Dubai Green Building System**
- **DDA – Dubai Development Authority**

4.0 MATERIALS, TOOLS & EQUIPMENT

- Standard PPE(hard hat, coveralls and safety shoes)
- Safety harness
- Hand gloves
- Work Permit
- Scaffold signs(Attachment 1 and 2)
- Lifeline
- Timber for supports

5.0 PROCEDURES:

Fall Protection

HSE Engineer/Safety Office shall:

Check all fall protection safety equipment to ensure that it is manufactured and inspected in compliance with appropriate British Standards or equivalent American or European Standards.

Confiscate and destroy defective fall protection safety equipment to prevent continued usage.

Site Engineer shall provide fall protection equipment for T1 and subcontractor personnel working on areas as stipulated in 2.0.

Overhead Works – Preparation:

- Overhead works as stipulated on 2.0 shall require proper scaffolds.
- No scaffold shall be erected, altered or dismantled except under the immediate supervision of a competent Scaffolding Supervisor/Site Engineer possessing adequate experience of such work.
- Scaffolding Supervisor/Site Engineer shall inspect all materials for any scaffold before being taken for use.

Scaffolding Supervisor/Site Engineer shall:

- Install a "NOT READY FOR USE" sign on scaffolds that are being erected, altered or dismantled.
- Only permit T1 and subcontractor personnel to be upon scaffold that has been inspected and clearly labeled" READY FOR USE".
- Ensure that all erection, alteration or dismantling activities are carried out in such a way those non-involved personnel in the vicinity of the work are not at risk.
- Provide fall protection equipment for T1 and subcontractor personnel working on areas as stipulated in 2.0.
- T1 and subcontractor personnel must be experienced in their work or shall be adequately trained to carry out the work safely.

Overhead works – Inspection:

- Scaffolding Supervisor/Site Engineer shall:
- Ensure that a scaffold/staging inspection logbook is maintained on site to record all inspections.
- Inspect all equipment that shall form any part of the scaffold, means of access, work platform and lifting facility.
- Inspect all scaffolding, inclusive of peripheral equipment prior to work each day. As appropriate, a weatherproof sign shall be placed in each access point and at the boundary of each scaffold section to clearly indicate if the scaffold is "READY FOR USE" or "NOT READY FOR USE".

Overhead Works

Site Engineer Shall:

- Prepare and have the necessary tool, equipment delivered to the worksite.
- Barricade the worksite and install appropriate safety warning signs.
- Assign a minimum practical number of personnel to carry out the work in order to minimize exposure to risks.
- Personnel have been brief in, and understand, the safety aspects of the work.
- Ensure that assigned personnel have been provided with, and are using, the required fall protection safety device.
- Control the work activities.
- Carry out housekeeping activities at the end of each working day and upon completion of work.

T.ONE
UNIVERSAL TRADING L.L.C

04

COMMERCIAL LICENSE FROM DED FOR SUPPLY OF PRODUCTS

حكومة دبي
GOVERNMENT OF DUBAI

DUBAI
للاقتصاد والسياحة
Economy and Tourism

رخصة تجارية
Commercial License

تفاصيل الرخصة / License Details

License No.	914812	رقم الرخصة	
Company Name	TONE UNIVERSAL TRADING L.L.C	اسم الشركة	تون يونفرسل للتجارة ش.ذ.م.م
Business Name	TONE UNIVERSAL TRADING L.L.C	الاسم التجاري	تون يونفرسل للتجارة ش.ذ.م.م
License Category	Dep. of Economic Development	فئة الرخصة	دائرة التنمية الاقتصادية
Legal Type	Limited Liability Company - Single Owner(LLC - SO)	الشكل القانونى	شركة ذات مسؤولية محدودة - الشخص الواحد (ذ.م.
Expiry Date	03/11/2026 تاريخ الإنتهاء	Issue Date	04/11/2020 تاريخ الإصدار
D&B D-U-N-S ® N	الرقم العالمى	Main License No.	914812 رقم الرخصة الام
Register No.	1522805 رقم السجل التجارى	DCCI No.	348181 عضوية الغرفة

الاطراف / License Members

رقم الشخص/No.	الإسم / Name	الجنسية / Nationality	الصفة / Role	الحصص / Share
1240026	عبدالرحمن هشام طه مقبل ABDULRAHMAN HESHAM TAHA MOQBEL	اليمن / Yemen	مالك / Shares Owner	100.00% حصص
1240026	عبدالرحمن هشام طه مقبل ABDULRAHMAN HESHAM TAHA MOQBEL	اليمن / Yemen	مدير / Manager	

أنشطة الرخصة / License Activities

النشاط	الحالة	Status	Activity
إستيراد	فعال	Active	Import
تجارة عامة	فعال	Active	General Trading
أعمال تركيب المطابخ بانواعها	فعال	Active	Kitchens Installation

Print Date 14/10/2025 12:43 تاريخ الطباعة

Receipt No. رقم الإيصال

الإمارات
THE EMIRATES

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجانا للسنة الاولى
Zoho.com/det

هذه شهادة الكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي. لمراجعة صحة البيانات الواردة في هذه الشهادة يرجى مسح رمز الاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

العنوان / Address

صندوق بريد	393014	P.O. Box	
رقم القطعة	353-1873	Parcel ID	
البريد الإلكتروني	info@t1-studio.com	Email	
تليفون		Phone No	
فاكس		Fax No	
هاتف متحرك	971-55-3964801	Mobile No	

1ملك محمد سلطان مطر مرخان الكتبي-بردبي الصفا الاولى-SH صاله عرض رقم

الملاحظات / Remarks

تم اضافة نشاط بتاريخ 26.12.2024

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجانا للسنة الاولى
Zoho.com/det

الإمـــارات
THE EMIRATES

هذه وثيقة الكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي. لمراجعة صحة البيانات الواردة في هذه الوثيقة يرجى مسح رمز الاستجابة السريع

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

حكومـــة دبـــي
GOVERNMENT OF DUBAI

دبي للاقتصاد والسياحة
Economy and Tourism

شهادة شهر قيد شركة فى السجل التجارى
Commercial Register

تفاصيل القيد / Register Details

رقم القيد	1522805	Register No.	
الاسم التجاري	تون يونفرسل للتجارة ش.ذ.م.م		
الشكل القانونى	شركة ذات مسؤولية محدودة - الشخص الواحد (ذ.م.م.)		
تاريخ الإصدار	04/11/2020	Reg. Date	
تاريخ الإنتهاء	03/11/2026	Expiry Date	
رقم الرخصة الأم	914812	Main Lice. Nr	
	TONE UNIVERSAL TRADING L.L.C	Business Name	
	Limited Liability Company - Single Owner(LLC - SO)	Legal Type	
الرقم العالمي		D&B D-U-N-S ® No.	

تفاصيل راس المال / Capital Details

الإسمى		Nominated	
المدفوع	150,000	Paid	
عدد الأسهم	150	No. of Shares	
العملة	درهم إماراتي	Currency	UAE Dirhams

عنوان الرخصة / License Address

عنوان السجل التجاري / Commerce Address

صاله عرض رقم SH-1ملك محمد سلطان مطر مرخان الكتبي-بردبي الصفا الاولى

أنشطة السجل / Register Activities

تجارة عامة	General Trading
أعمال تركيب المطابخ بانواعها	Kitchens Installation
إستيراد	Import

رقم الإيصال Receipt No.

تاريخ الطباعة 12:43 14/10/2025 Print Date

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجانا للسنة الاولى
Zoho.com/det

الإمـــارات
THE EMIRATES

هذه شهادة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي. لمراجعة صحة البيانات الواردة فيها يرجى مسح رمز الاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

T.ONE
UNIVERSAL TRADING L.L.C

05

COMMERCIAL LICENSE FROM DED FOR INSTALLATION /APPLICATION OF PRODUCTS

حكومة دبي
GOVERNMENT OF DUBAI

DUBAI
للاقتصاد والسياحة
Economy and Tourism

رخصة تجارية
Commercial License

License Details / تفاصيل الرخصة

License No.	914812	رقم الرخصة	
Company Name	TONE UNIVERSAL TRADING L.L.C	اسم الشركة	تون يونفرسل للتجارة ش.ذ.م.م
Business Name	TONE UNIVERSAL TRADING L.L.C	الاسم التجاري	تون يونفرسل للتجارة ش.ذ.م.م
License Category	Dep. of Economic Development	فئة الرخصة	دائرة التنمية الاقتصادية
Legal Type	Limited Liability Company - Single Owner(LLC - SO)	الشكل القانونى	شركة ذات مسؤولية محدودة - الشخص الواحد (ذ.م.
Expiry Date 03/11/2026	تاريخ الإنتهاء	Issue Date 04/11/2020	تاريخ الإصدار
D&B D-U-N-S ® N	الرقم العالمى	Main License No. 914812	رقم الرخصة الام
Register No. 1522805	رقم السجل التجارى	DCCI No. 348181	عضوية الغرفة

License Members / الاطراف

رقم الشخص/No.	الإسم / Name	الجنسية / Nationality	الصفة / Role	الحصص / Share
1240026	عبدالرحمن هشام طه مقبل ABDULRAHMAN HESHAM TAHA MOQBEL	اليمن / Yemen	مالك / Shares Owner حصص	100.00%
1240026	عبدالرحمن هشام طه مقبل ABDULRAHMAN HESHAM TAHA MOQBEL	اليمن / Yemen	مدير / Manager	

License Activities / أنشطة الرخصة

النشاط	الحالة	Status	Activity
إستيراد	فعال	Active	Import
تجارة عامة	فعال	Active	General Trading
أعمال تركيب المطابخ بانواعها	فعال	Active	Kitchens Installation

Print Date 14/10/2025 12:43 تاريخ الطباعة

Receipt No. رقم الإيصال

الإمـــارات
THE EMIRATES

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجاناً للسنة الاولى
Zoho.com/det

وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي .لمراجعة صحة البيانات الواردة في الرخصة يرجي مسح رمزالاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

العنوان / Address

صندوق بريد	393014	P.O. Box	
رقم القطعة	353-1873	Parcel ID	
البريد الإلكتروني	info@t1-studio.com	Email	
هاتف متحرك	971-55-3964801	Mobile No	
فاكس		Fax No	
تليفون		Phone No	

1ملك محمد سلطان مطر مرخان الكتبي-بردبي الصفا الاولى-SH صاله عرض رقم

الملاحظات / Remarks

تم اضافة نشاط بتاريخ 26.12.2024

رقم الإيصال Receipt No.

تاريخ الطباعة 14/10/2025 12:43 Print Date

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجاناً للسنة الاولى
Zoho.com/det

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

الإمـــارات
THE EMIRATES

وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي .لمراجعة صحة البيانات الواردة في الرخصة يرجي مسح رمزالاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

حكومـــة دبـــي
GOVERNMENT OF DUBAI

دبي
للاقتصـاد والسيـاحـة
Economy and Tourism

شهادة شهر قيد شركة فى السجل التجارى
Commercial Register

تفاصيل القيد / Register Details

رقم القيد	1522805	Register No.	
الاسم التجاري	تون يونفرسل للتجارة ش.ذ.م.م		
الشكل القانونى	شركة ذات مسؤولية محدودة - الشخص الواحد (ذ.م.م.)		
تاريخ الإصدار	04/11/2020	Reg. Date	
الرقم العالمي			

Main Lice. Nr	914812	رقم الرخصة الأم	
Business Name	TONE UNIVERSAL TRADING L.L.C		
Legal Type	Limited Liability Company - Single Owner(LLC - SO)		
Expiry Date	03/11/2026	تاريخ الإنتهاء	
D&B D-U-N-S ® No.			

تفاصيل راس المال / Capital Details

الإسمى		Nominated	
المدفوع	150,000	Paid	
عدد الأسهم	150	No. of Shares	
العملة	درهم إماراتي	Currency	UAE Dirhams

عنوان الرخصة / License Address

عنوان السجل التجاري / Commerce Address

صاله عرض رقم SH-1ملك محمد سلطان مطر مرخان الكتبي-بردبي الصفا الاولى

أنشطة السجل / Register Activities

تجارة عامة	General Trading
أعمال تركيب المطابخ بانواعها	Kitchens Installation
إستيراد	Import

Print Date 14/10/2025 12:43 تاريخ الطباعة

Receipt No. رقم الإيصال

الإمـــارات
THE EMIRATES

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو/ اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6969 (Du/ Etisalat) to receive payment voucher.

Get FREE access to Zoho One for the first year
احصل على زوهو ون مجاناً للسنة الاولى
Zoho.com/det

وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي .لمراجعة صحة البيانات الواردة في الرخصة يرجي مسح رمزالاستجابة السريعة

This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate

T.ONE
UNIVERSAL TRADING L.L.C

06

INDUSTRIAL LICENSE FROM UAE FOR MANUFACTURE OF PRODUCT

- NOT APPLICABLE-

T.ONE
UNIVERSAL TRADING L.L.C

07

DUBAI CENTRAL LABORATORY DEPARTMENT-DCL PRODUCT CONFORMITY CERTIFICATE

-NOT APPLICABLE-

T.ONE
UNIVERSAL TRADING L.L.C

08

AVAILABILITY OF PRODUCT COMPLYING WITH PROJECT SPECIFICATION REQUIREMENTS

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

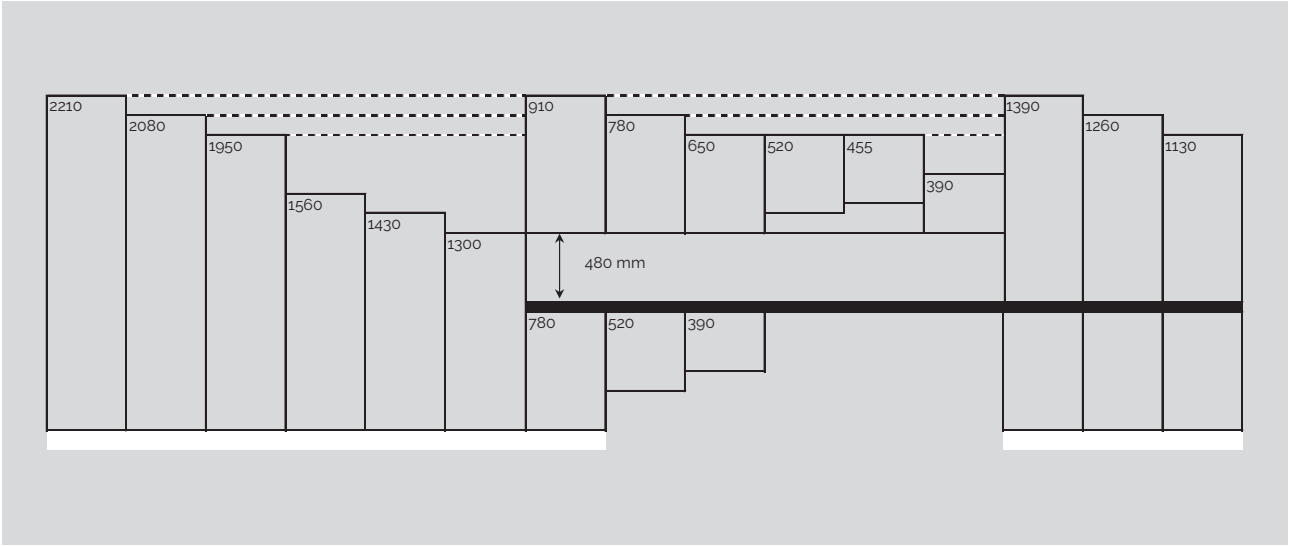

Instruction manual - General information

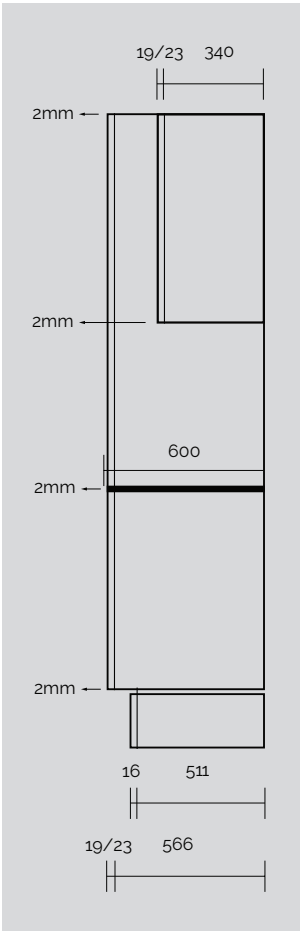

GENERAL INFORMATION	STANDARD	HANDLELESS
Space between worktop and base unit front	2mm	36mm
Sizes in units are carcase heights		
Sizes in mm		
Sizes are based on worktop thickness 40 mm		
CARCASE DEPTH		
For base and tall units	566mm	576mm
For wall units	340mm	340mm
Front thickness	19/23mm	19/23mm
SERVICE GAP		
For base and tall units	60mm	60mm
For wall units	17mm	17mm
PLINTH HEIGHT		
Standard plinth height	130mm	
Also available (Alternative plinth heights to be cut in height on site)	70 / 100 / 170 / 200mm	70 / 100 / 170 / 200mm

Modifications in measurements, models and designs are reserved.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

Important information

- Fitting kitchen furniture has to be executed by skilled fitters and according to this instruction manual for safety and quality purposes.
- For additional units not mentioned in this manual, a separate manual will be issued. It is vital to follow these instructions.
- Make sure all parts are complete by checking off the delivery note, before fitting the kitchen.
- Not following the fitting guidelines or incorrect fitting may result in less usability, material damage of physical injury. The manufacturer will not accept any liability in such case.
- Start fitting the base units. In case of a corner unit, start fitting in the corner.
- The connections for gas, electricity and sanitation are to be applied or altered by a specialist.
- In case of built-in appliances and lighting the fitting- and instruction manuals of the manufacturer are to be followed.
- All supplied mounting hardware for fitting the kitchen furniture is only suitable for solid walls.
- The manufacturer will not accept any liability for damages or physical injuries as a result of fitting kitchen furniture on walls that are unsuitable.
- Every run of base or wall units is to be secured against turning over.
- Not fitting the units level may result in defects and limited functionality.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

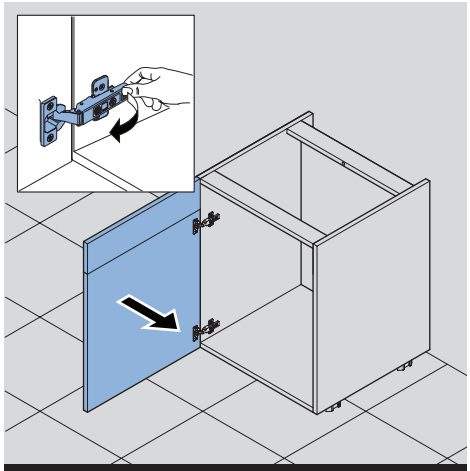

DISMOUNTING DOORS MH 3.1

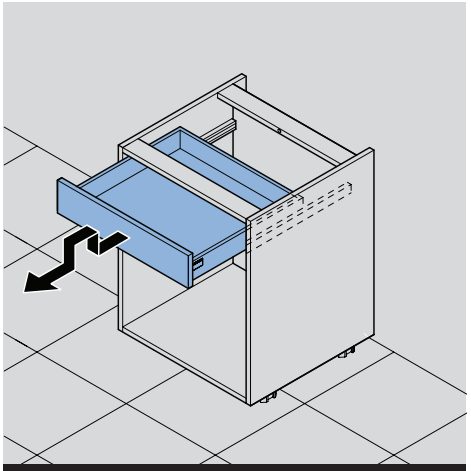

REMOVING DRAWERS MH 3.2

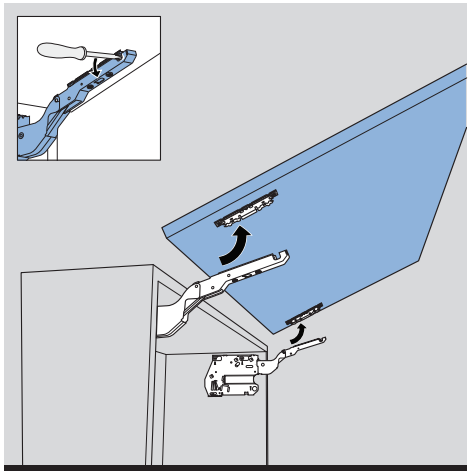

DISMOUNTING FLAPDOORS MH 3.3

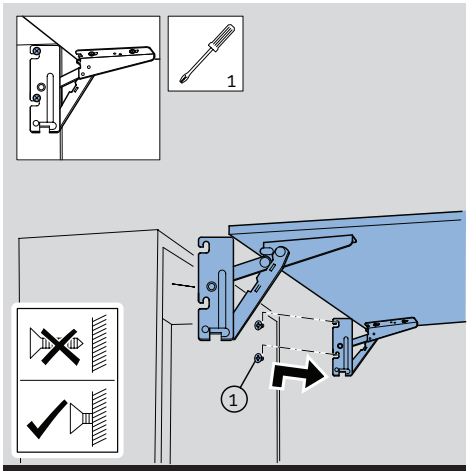

DISMOUNTING FLAPDOORS MH 3.4

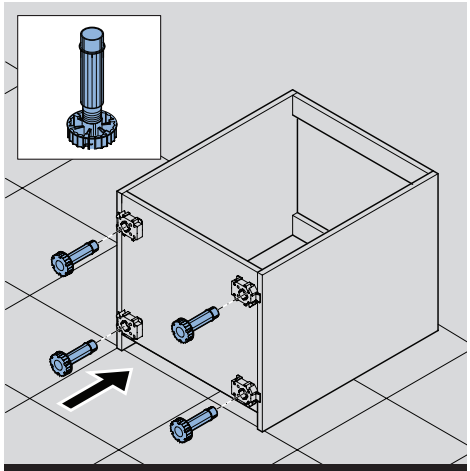

FIXING PLINTHLEGS MH 3.5

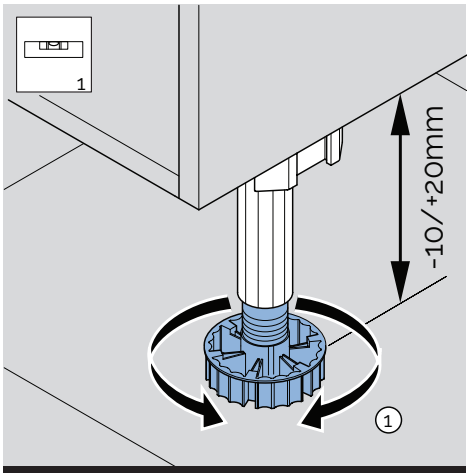

ADJUSTABILITY PLINTHLEG MH 3.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

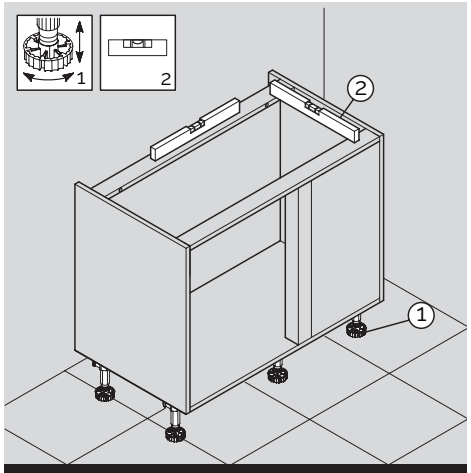

FITTING CORNER BASE UNIT **MH 4.1**

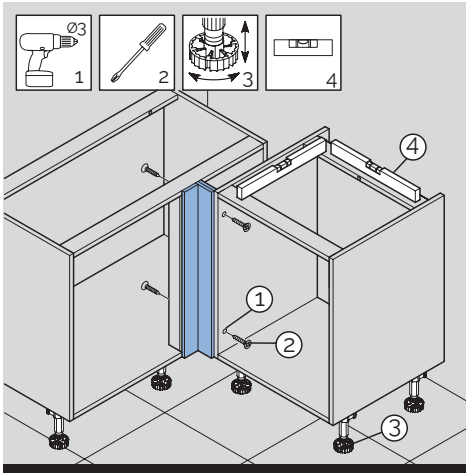

FITTING/JOINING CORNER POST **MH 4.2**

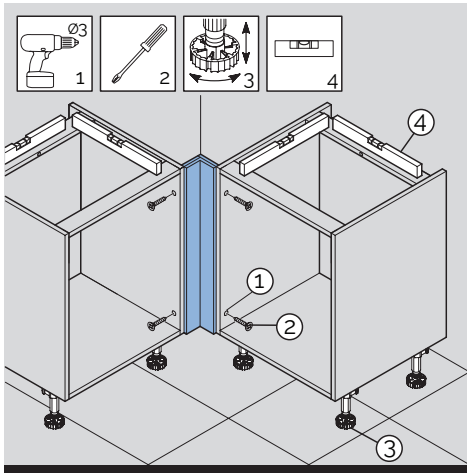

FITTING/JOINING CORNER BASE UNITS/ CORNER POST **MH 4.3**

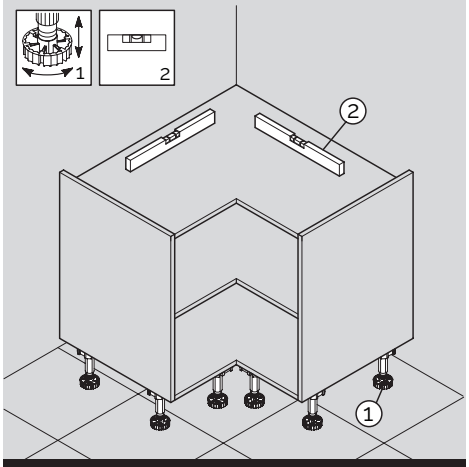

FITTING CORNER BASE UNIT **MH 4.4**

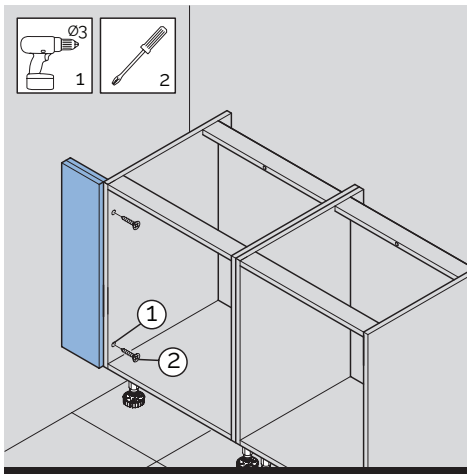

FITTING FILLER **MH 4.5**

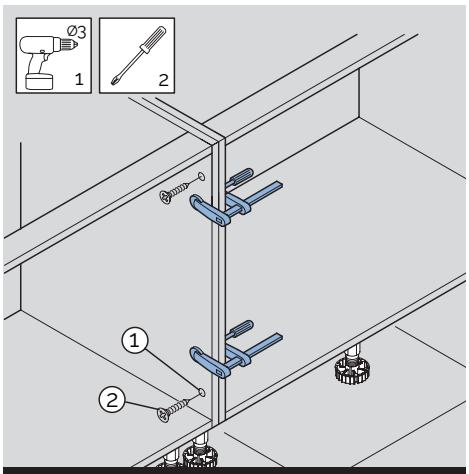

JOINING UNITS **MH 4.6**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

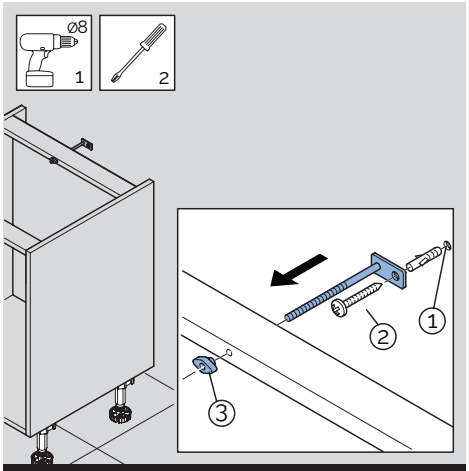

FITTING ROLLOVER PROTECTIVE **MH 5.1**

MH 5.1

To secure the base units against rolling over, one is to mount fixing brackets at the back. Make use of fixing materials suitable for the underlay.

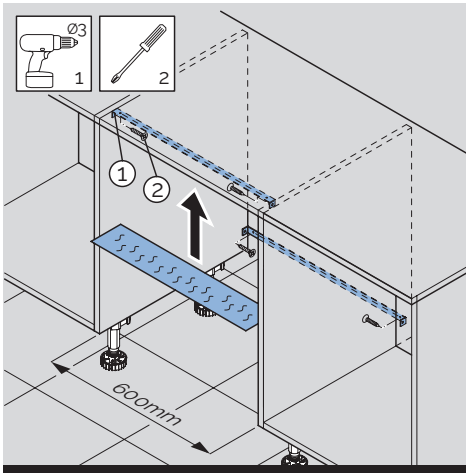

PREPARING FITTING OF DISHWASHER **MH 5.2**

MH 5.2

To ensure the distance of 600mm required for the dishwasher, please fix the spacer profiles at the top in the front and at the bottom in the back.

In order to protect the worktop, make sure to fix the protective plate or tape supplied with the dishwasher at the underside of the worktop.

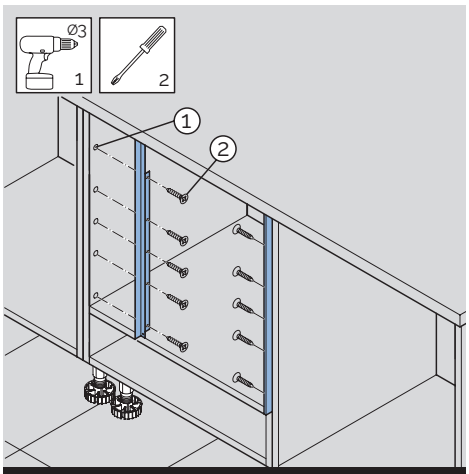

FITTING PROTECTION STRIPS OVEN HOUSING **MH 5.3**

MH 5.3

Oven housings with a recess of 600mm are supplied with heat protection strips. These strips will protect the adjacent fronts against heat emission.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

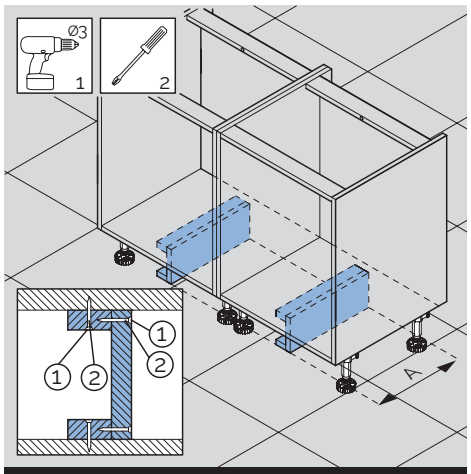

FITTING ROLLOVER PROTECTION FOR ISLAND RUN **MH 6.1**

MH 6.1

A freestanding island run always needs to be secured to the floor to avoid rolling over or moving over. Cut the supplied materials to size. Width A=250mm minimum. Suitable fixing materials are to be used for fixation onto the underlying floor/surface.

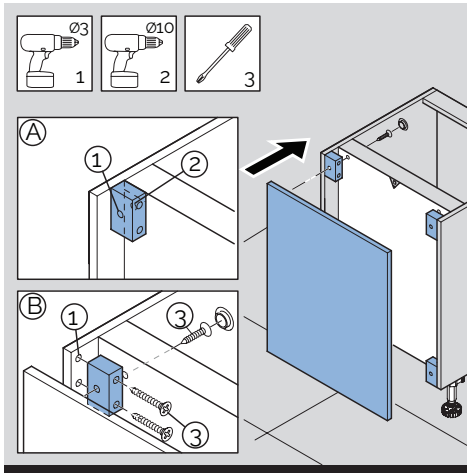

FITTING BACK PANEL ISLAND RUN **MH 6.2**

MH 6.2

Concealed fitting of the back panel onto the island run is to be done from the inside of the cabinet. Please make use of the wooden cubes as a mold to drill the hole through the back panel. Drill the hole in the back panel bigger to ø10mm (A).

Fix the cubes at the far back of the side gables of the cabinet.

Fix the panels from the inside and place a cover cap over the top of the screws (B).

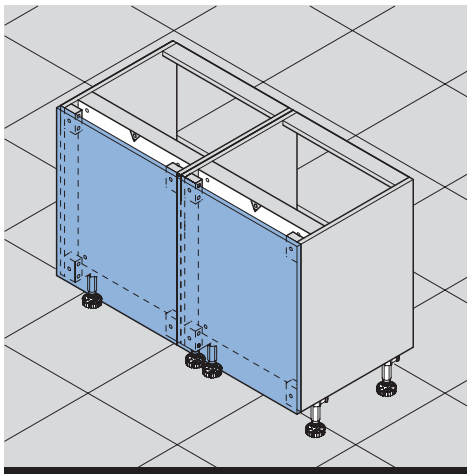

FITTED BACK PANEL ISLAND RUN **MH 6.3**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

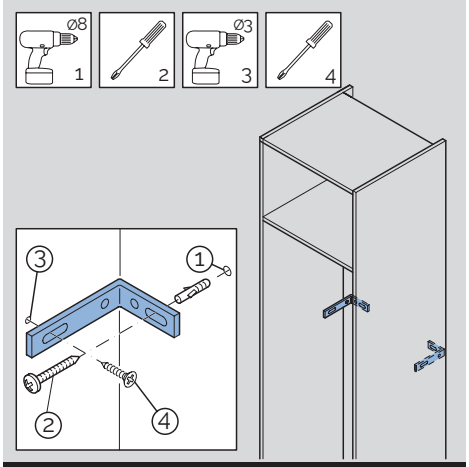

FITTING ROLLOVER PROTECTIVE TALL UNIT MH 7.1

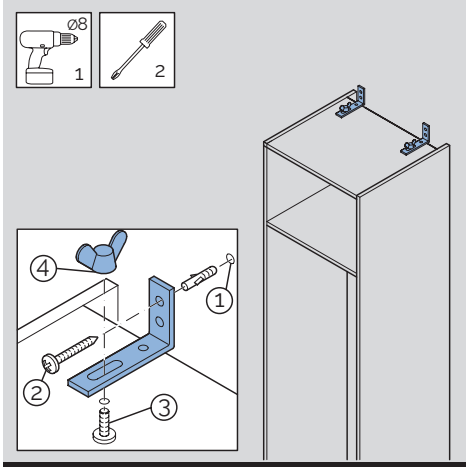

FITTING ROLLOVER PROTECTIVE TALL UNIT MH 7.2

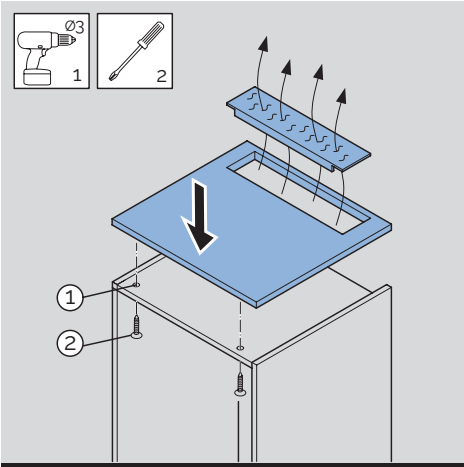

FITTING COVERING PANEL/ VENTILATION GRID MH 7.3

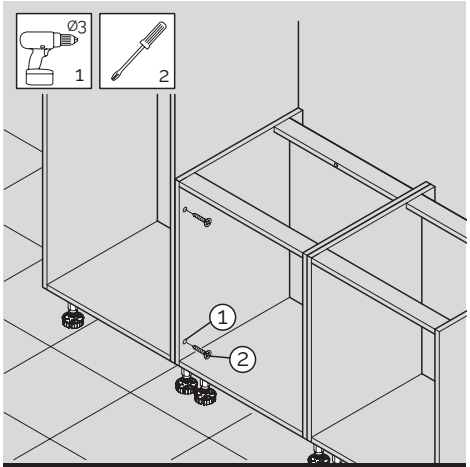

JOINING TALL UNIT – BASE UNIT MH 7.4

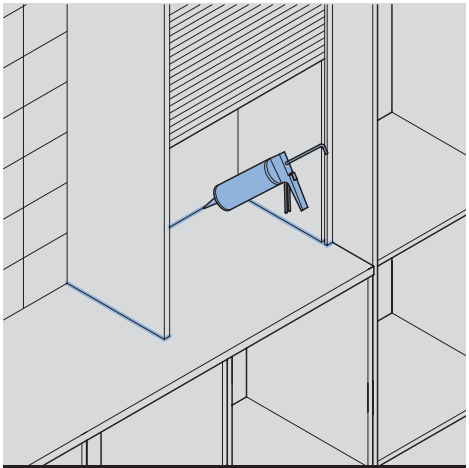

SEALING WORKTOP DRESSER UNITS ON WORKTOP MH 7.5

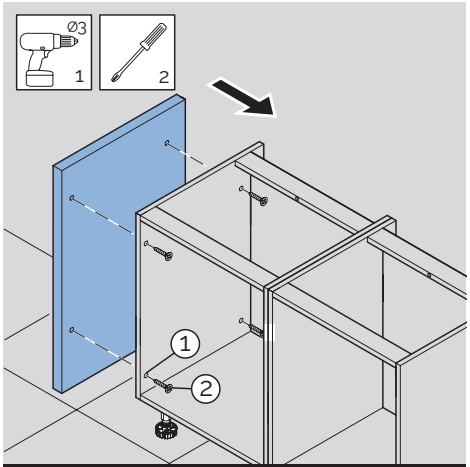

FIXING SIDE PANEL MH 7.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

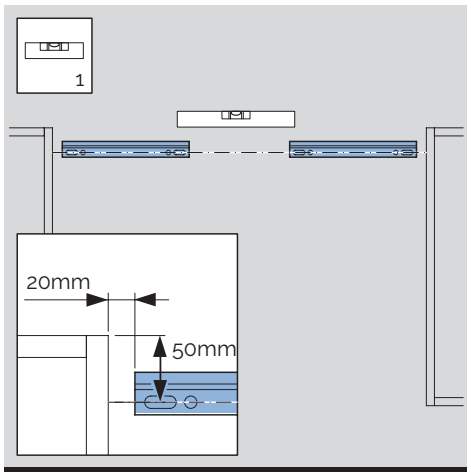

FIXING HANGING RAILS WALL UNITS **MH 8.1**

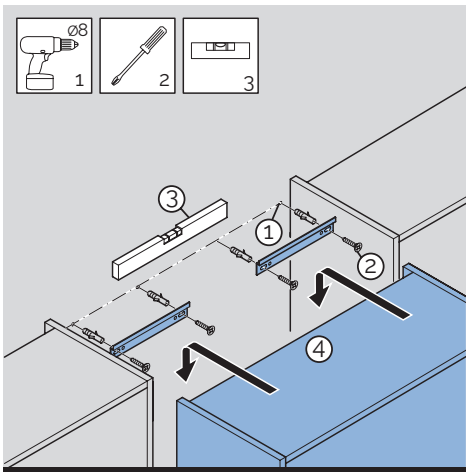

FIXING HANGING RAILS WALL UNITS **MH 8.2**

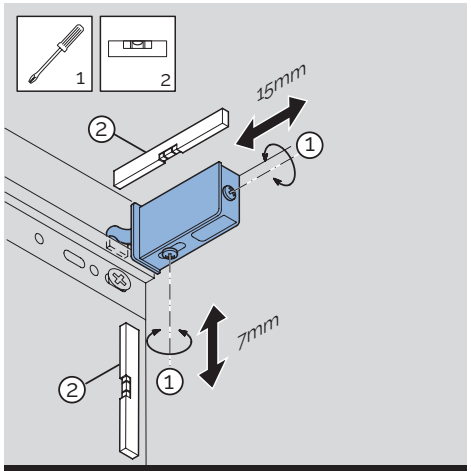

ADJUSTING WALL UNITS **MH 8.3**

MH 8.3

Suitable fixing materials are to be used for fixation onto the underlying surface. Make sure to turn out the adjusting screw to allow the hanging bracket to go behind the wall hook. Maximum weight wall units=110kg provided it is equally divided over the cabinet.

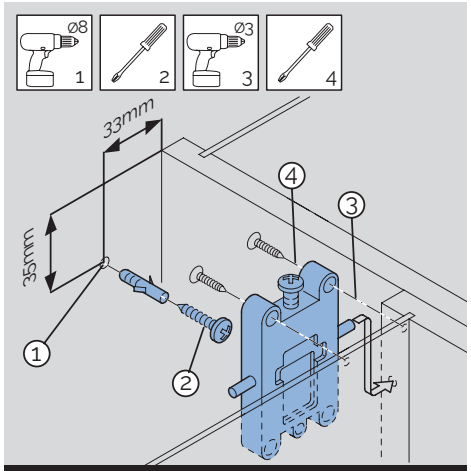

FIXING HANGING BRACKETS OPEN WALL UNITS **MH 8.4**

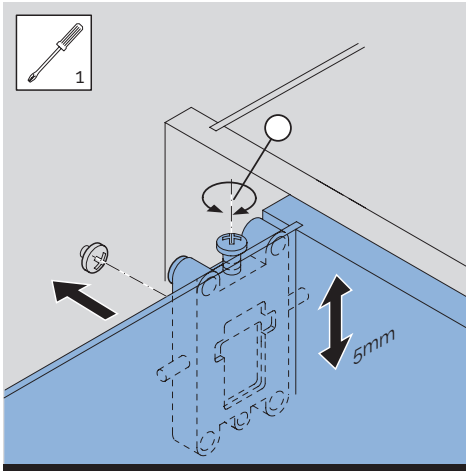

HANGING/ADJUSTING OPEN WALL UNIT **MH 8.5**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

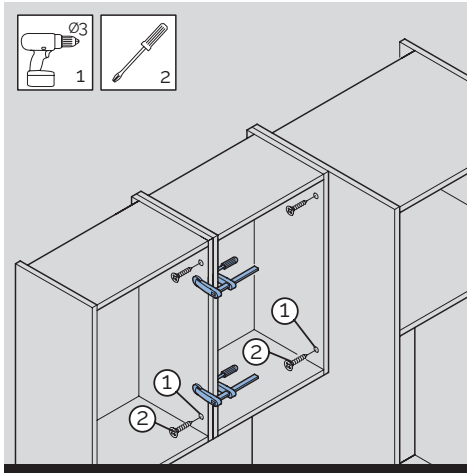

JOINING WALL UNITS **MH 9.1**

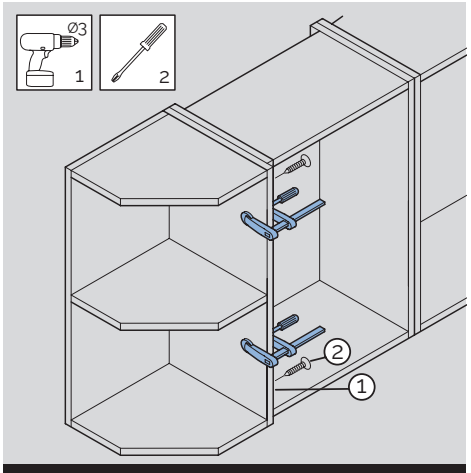

FIXING OPEN END UNIT **MH 9.2**

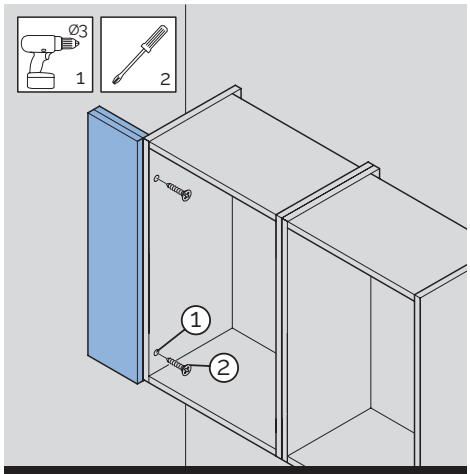

FITTING FILLER WALL UNIT **MH 9.3**

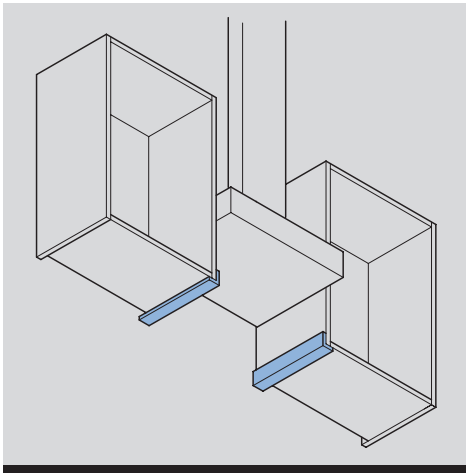

FITTING PROTECTION STRIPS COOKING VAPORS **MH 9.4**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

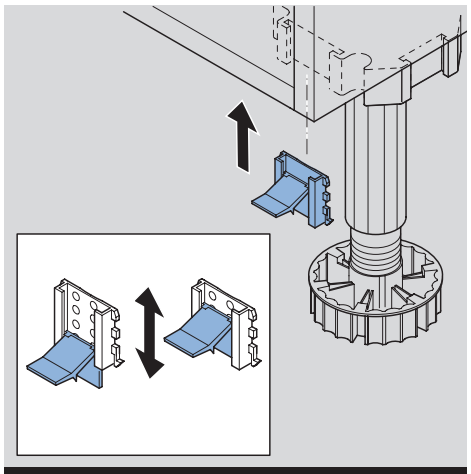

FITTING PLINTH STEP 1 MH 10.1

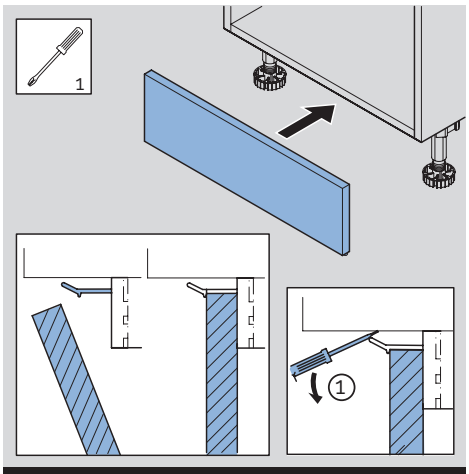

FITTING PLINTH STEP 2 MH 10.2

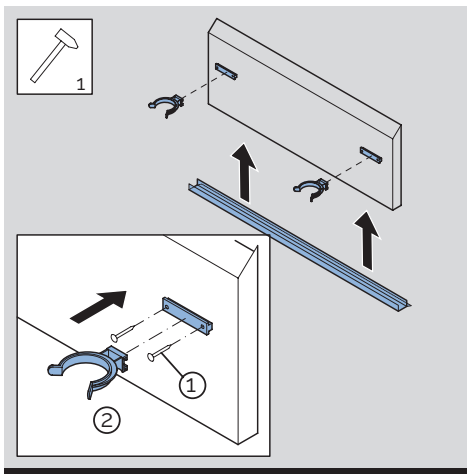

FITTING RETURN PLINTH STEP 1 MH 10.3

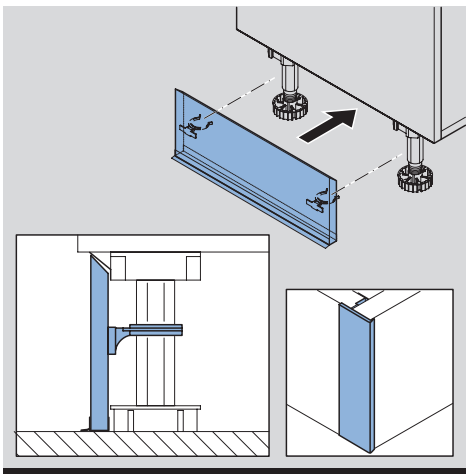

FITTING RETURN PLINTH STEP 2 MH 10.4

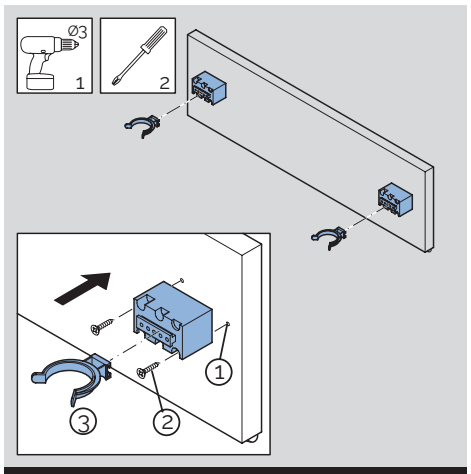

SHALLOW PLINTH NOTCH STEP 1 MH 10.5

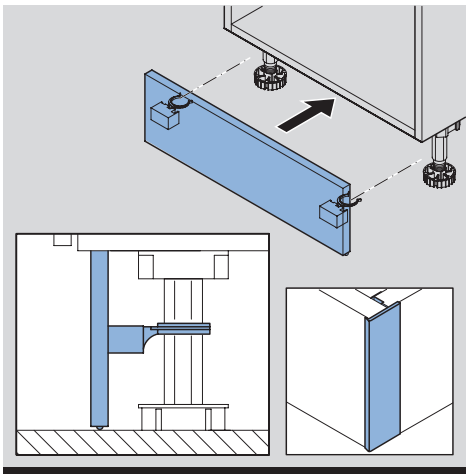

SHALLOW PLINTH NOTCH STEP 2 MH 10.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

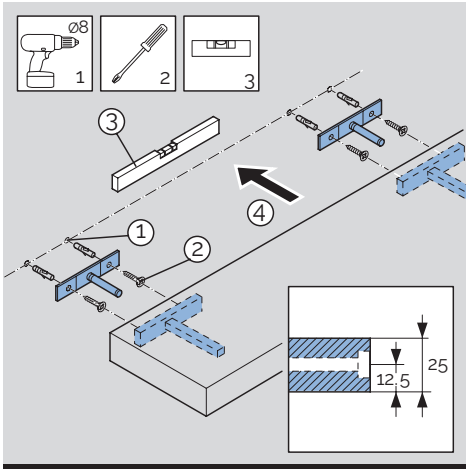

FIXING ADJUSTABLE STUDS FOR WALL SHELVES **MH 11.1**

MH 11.1

Suitable fixing materials are to be used for fixation onto the underlying surface.

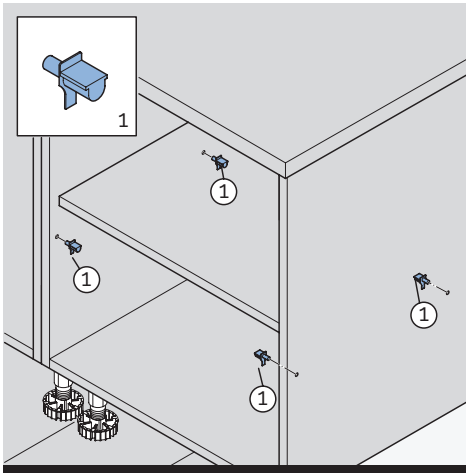

PLACING SHELF PEGS **MH 11.2**

MH 11.2

Place shelf pegs in holes inside the cabinet.

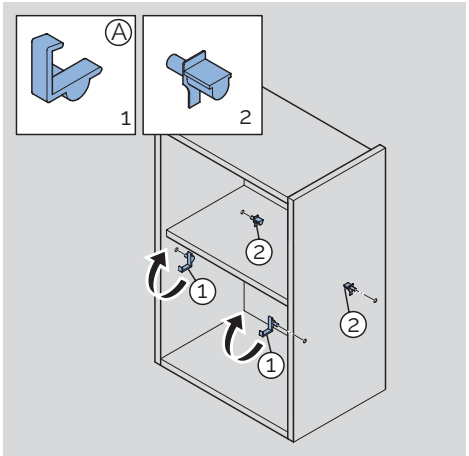

PLACING SHELF PEGS WITH ROLLOVER PROTECTION **MH 11.3**

MH 11.3

Place shelf pegs in holes inside the cabinet.
Place shelf onto the pegs en turn “hooks” on left and right hand side (A) around the shelf.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

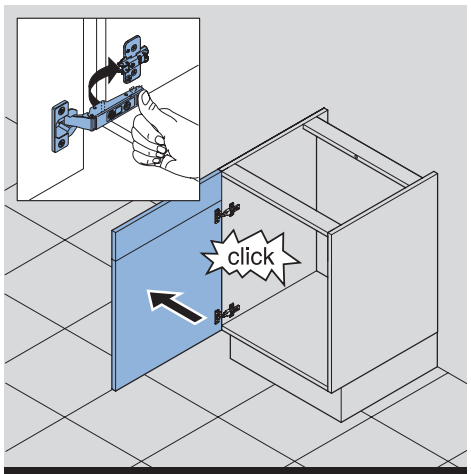

MOUNTING DOORS MH 12.1

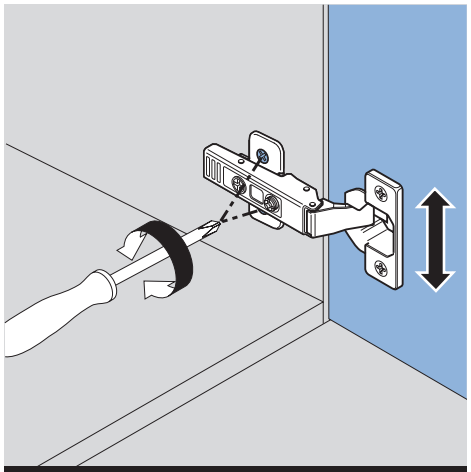

DOORS – HEIGHT ADJUSTMENT MH 12.2

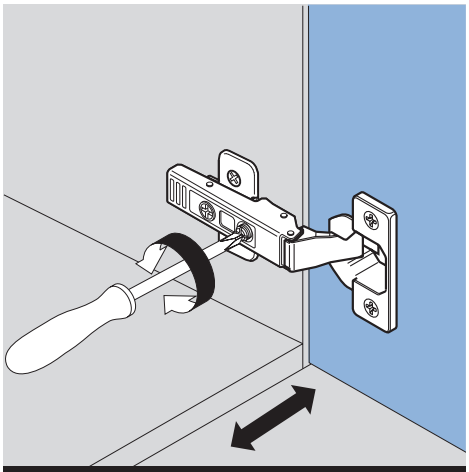

DOORS – SIDE ADJUSTMENT MH 12.3

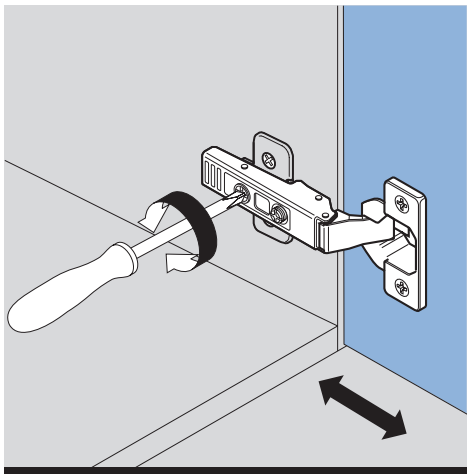

DOORS – DEPTH ADJUSTMENT MH 12.4

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

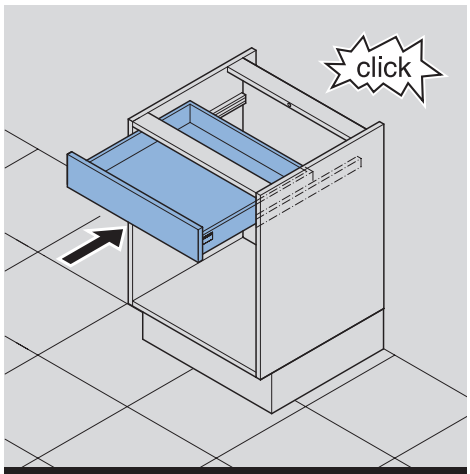

MOUNTING DRAWERS MH 13.1

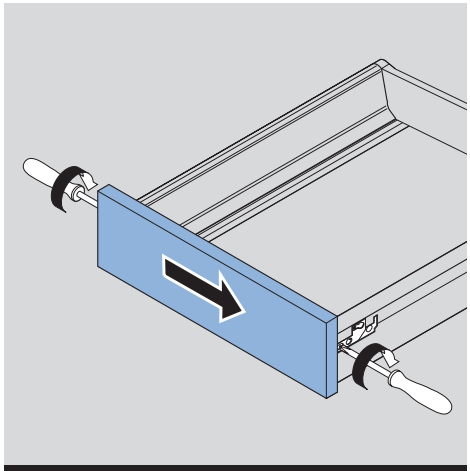

ADJUSTMENT DRAWERFRONT SIDEWARDS TO THE RIGHT MH 13.2

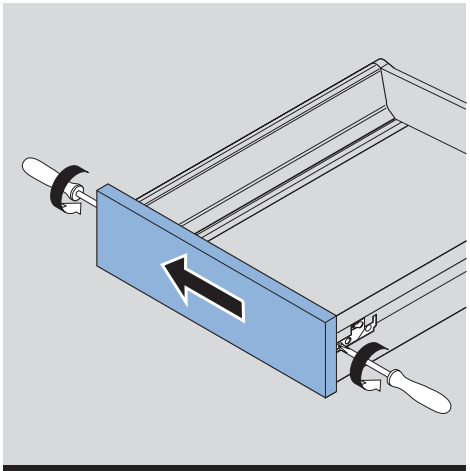

ADJUSTMENT DRAWERFRONT SIDEWARDS TO THE LEFT MH 13.3

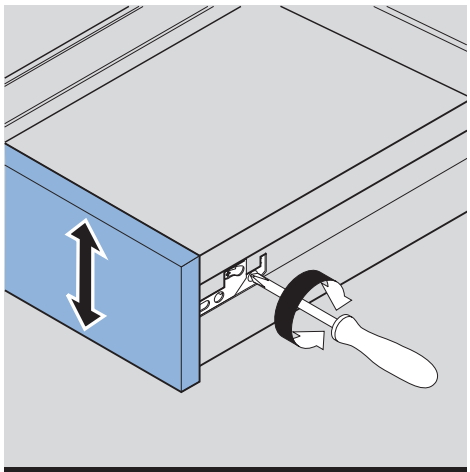

ADJUSTMENT DRAWERFRONT IN HEIGHT MH 13.4

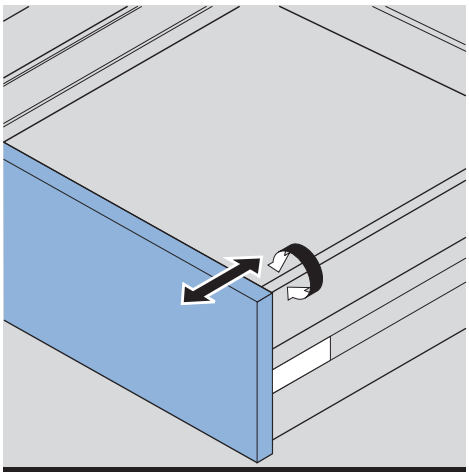

ADJUSTMENT DRAWERFRONT ANGLE MH 13.5

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

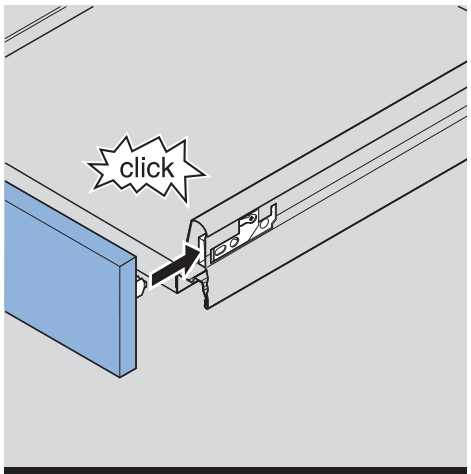

MOUNTING DRAWERFRONT MH 14.1

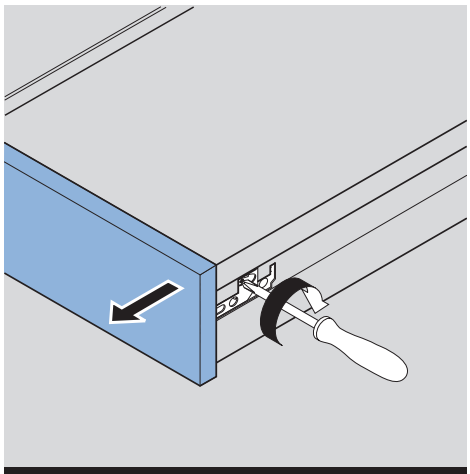

DISMOUNTING DRAWERFRONT MH 14.2

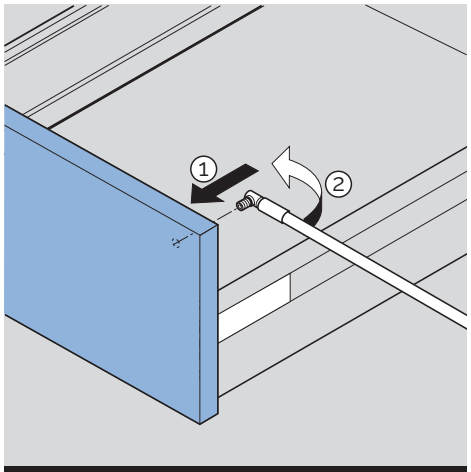

MOUNTING PANDRAWERFRONT AT FRONT MH 14.3

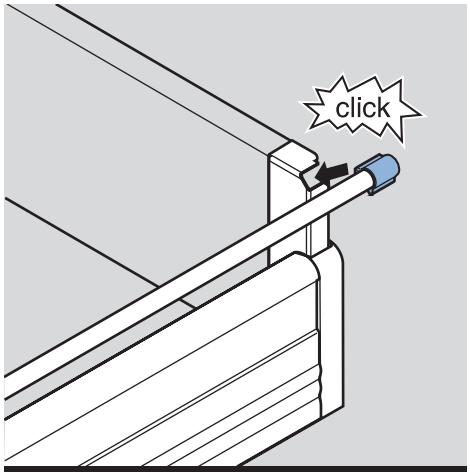

MOUNTING PANDRAWERFRONT AT BACK MH 14.4

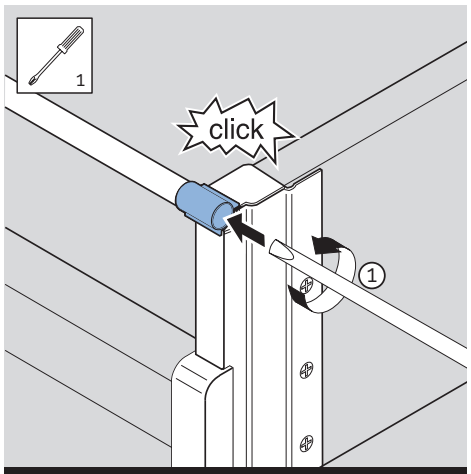

DISMOUNTING PANDRAWERFRONT AT BACK MH 14.5

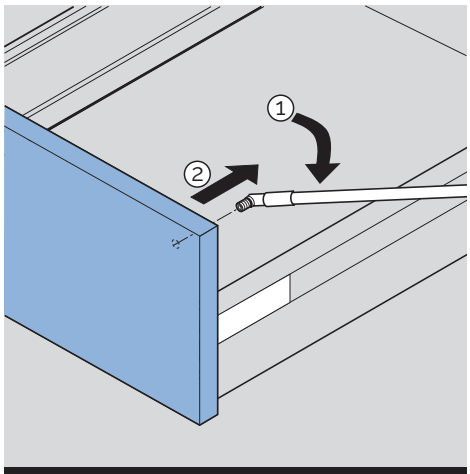

DISMOUNTING PANDRAWERFRONT AT FRONT MH 14.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

Maintenance and use

The manufacturer's warranty covers material- and construction defects. Please read this instruction manual carefully before using the kitchen.

MAINTENANCE

- Cleaning wooden, painted, foil, acrylic and melamine fronts are to be done with common household water soluble cleansing agents only. Do not use aggressive or abrasive detergents.
- Avoid excessive use of water during cleaning.
- Dry properly after cleaning to avoid water remaining in corners and seams.
- Stubborn stains can be cleaned with a synthetic detergent.
- Furniture polish and wax are not suitable.
- Do not use steam cleaners.
- Do not leave wet or moist cloths or mops lying on cabinet bottoms or shelves for a longer period. Avoid a longer period of penetration of moist.
- Worktops and sinks may be cleaned in the same manner, if needed by making use of a brush and/or fluid abrasive (not scouring powder). Do not use abrasive products such as cleaner, steel wool, scouring pads or scotchbrite.
- For maintenance and cleaning of appliances we refer to the regulations of the appliance manufacturers.

USE

- Do not place hot pans onto the worktop, always use coasters.
- We advise to always use a chopping board when cutting on the worktop.
- Never use coffeemakers, water boilers, etc. directly under the wall cabinets.
- Do not let an oven cool down with an open door and never leave the oven door open unnecessarily long.
- Never leave the cooking zone of a gas hob on without a pan on it.
- Never open the door of a dishwasher filled with hot steam.
- Gashobs and stoves placed next to a kitchen are to be placed 1 cm. above the worktop to avoid damage or fire hazard.

Adjusting the fronts and drawers and damages as a result of faulty use and maintenance are not covered by warrantee.

T.ONE
UNIVERSAL TRADING L.L.C

09

PRODUCT DETAILS (ONLY RELEVANT TO THE PROJECT)

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

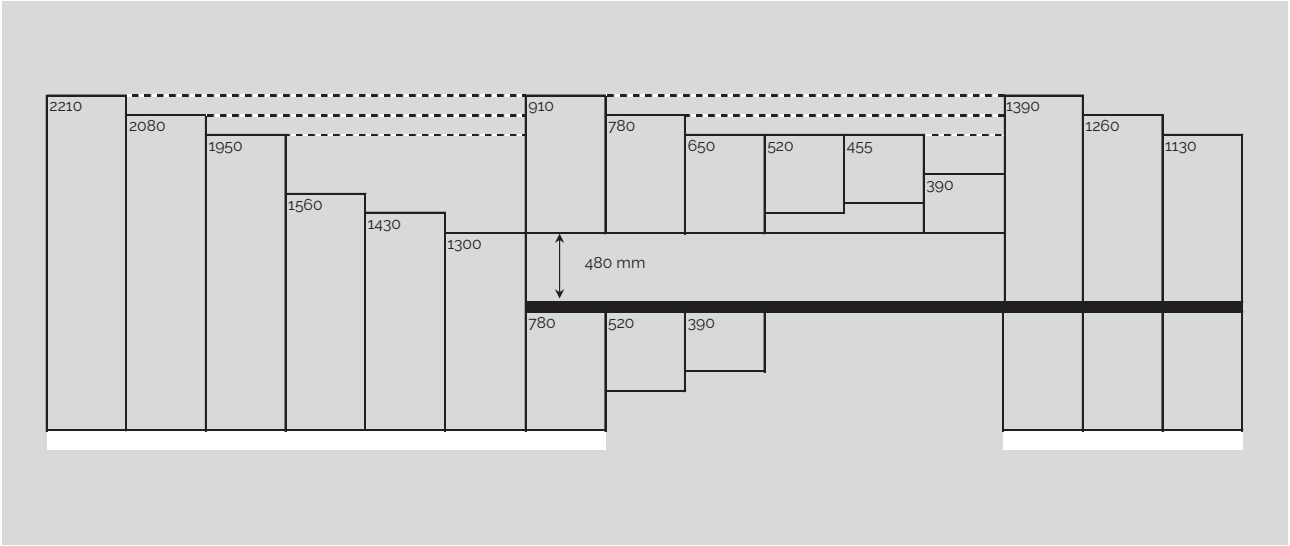

Instruction manual - General information

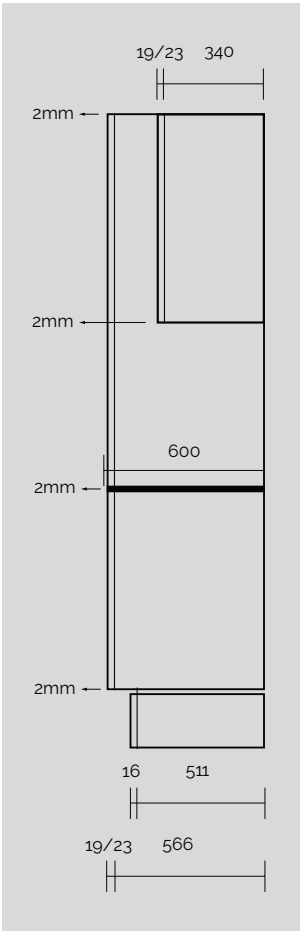

GENERAL INFORMATION	STANDARD	HANDLELESS
Space between worktop and base unit front	2mm	36mm
Sizes in units are carcase heights		
Sizes in mm		
Sizes are based on worktop thickness 40 mm		
CARCASE DEPTH		
For base and tall units	566mm	576mm
For wall units	340mm	340mm
Front thickness	19/23mm	19/23mm
SERVICE GAP		
For base and tall units	60mm	60mm
For wall units	17mm	17mm
PLINTH HEIGHT		
Standard plinth height	130mm	
Also available (Alternative plinth heights to be cut in height on site)	70 / 100 / 170 / 200mm	70 / 100 / 170 / 200mm

Modifications in measurements, models and designs are reserved.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

Important information

- Fitting kitchen furniture has to be executed by skilled fitters and according to this instruction manual for safety and quality purposes.
- For additional units not mentioned in this manual, a separate manual will be issued. It is vital to follow these instructions.
- Make sure all parts are complete by checking off the delivery note, before fitting the kitchen.
- Not following the fitting guidelines or incorrect fitting may result in less usability, material damage of physical injury. The manufacturer will not accept any liability in such case.
- Start fitting the base units. In case of a corner unit, start fitting in the corner.
- The connections for gas, electricity and sanitation are to be applied or altered by a specialist.
- In case of built-in appliances and lighting the fitting- and instruction manuals of the manufacturer are to be followed.
- All supplied mounting hardware for fitting the kitchen furniture is only suitable for solid walls.
- The manufacturer will not accept any liability for damages or physical injuries as a result of fitting kitchen furniture on walls that are unsuitable.
- Every run of base or wall units is to be secured against turning over.
- Not fitting the units level may result in defects and limited functionality.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

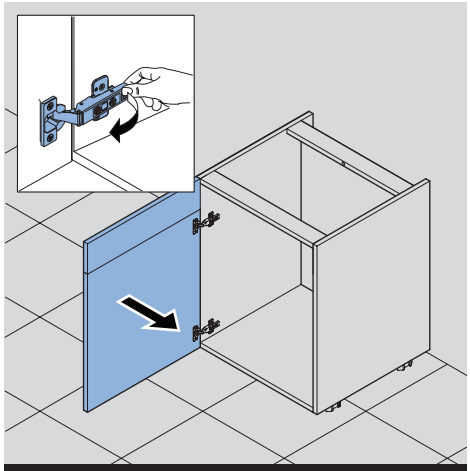

DISMOUNTING DOORS MH 3.1

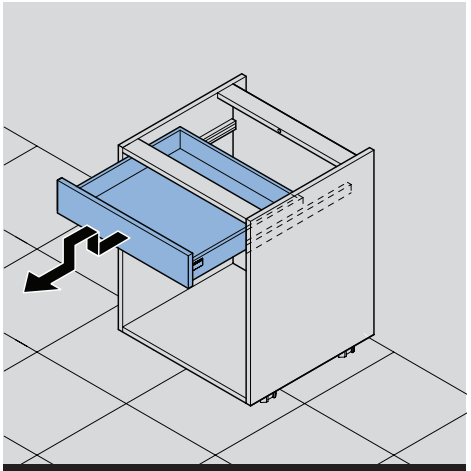

REMOVING DRAWERS MH 3.2

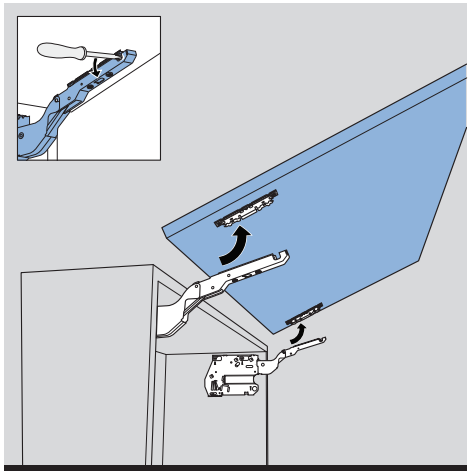

DISMOUNTING FLAPDOORS MH 3.3

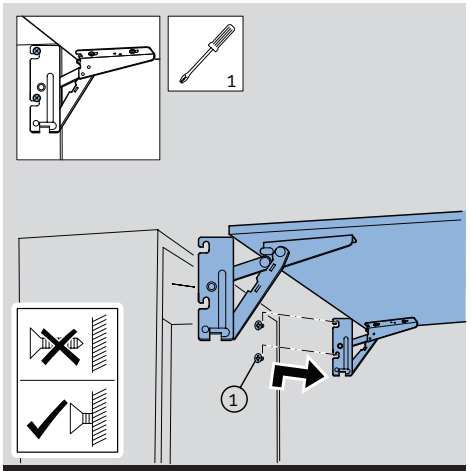

DISMOUNTING FLAPDOORS MH 3.4

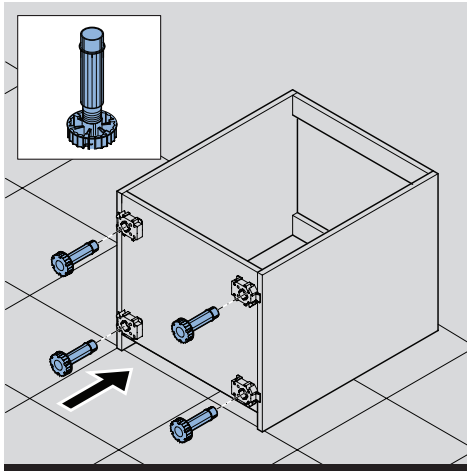

FIXING PLINTHLEGS MH 3.5

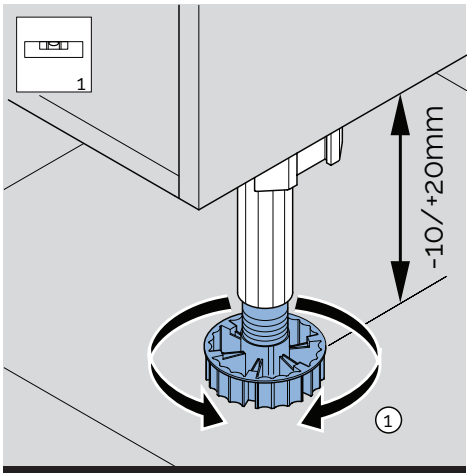

ADJUSTABILITY PLINTHLEG MH 3.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

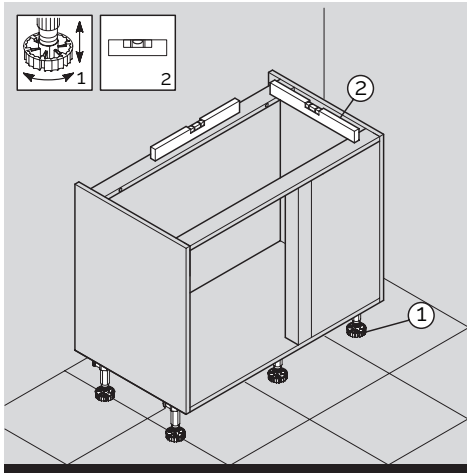

FITTING CORNER BASE UNIT **MH 4.1**

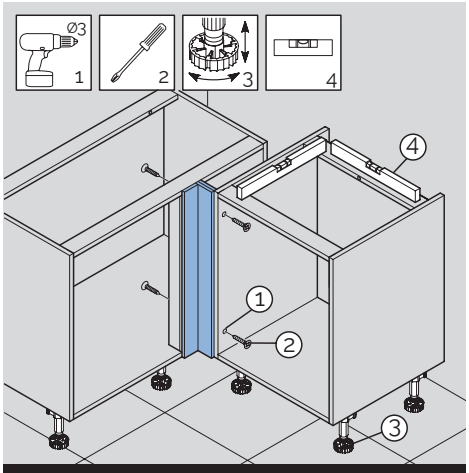

FITTING/JOINING CORNER POST **MH 4.2**

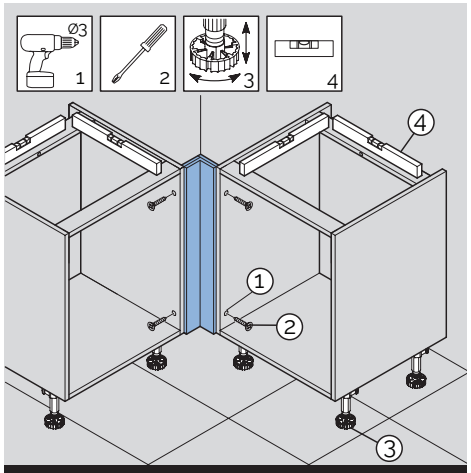

FITTING/JOINING CORNER BASE UNITS/ CORNER POST **MH 4.3**

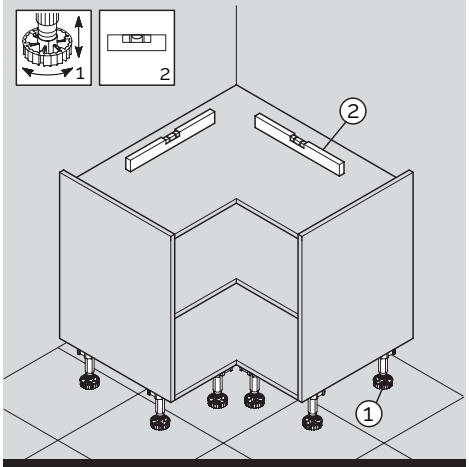

FITTING CORNER BASE UNIT **MH 4.4**

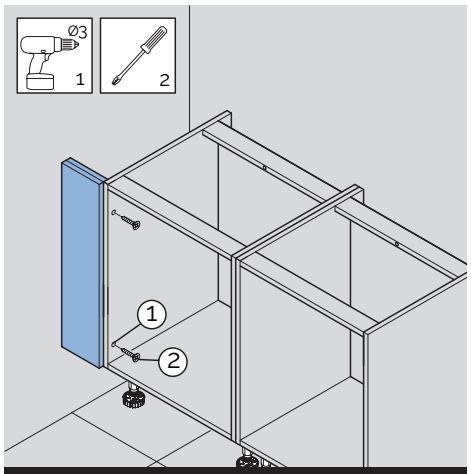

FITTING FILLER **MH 4.5**

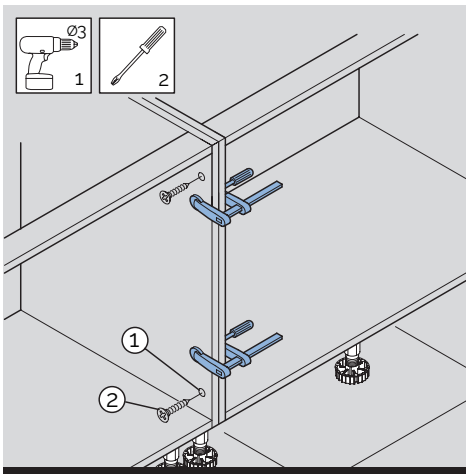

JOINING UNITS **MH 4.6**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

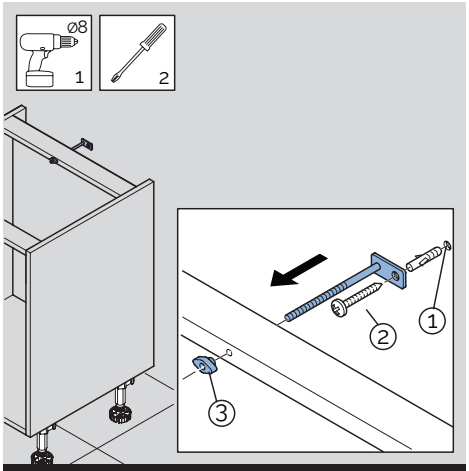

FITTING ROLLOVER PROTECTIVE **MH 5.1**

MH 5.1

To secure the base units against rolling over, one is to mount fixing brackets at the back. Make use of fixing materials suitable for the underlay.

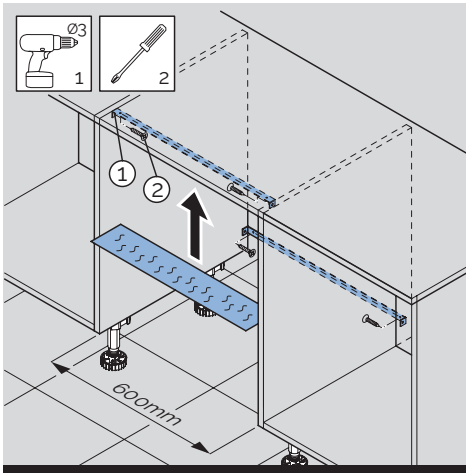

PREPARING FITTING OF DISHWASHER **MH 5.2**

MH 5.2

To ensure the distance of 600mm required for the dishwasher, please fix the spacer profiles at the top in the front and at the bottom in the back.

In order to protect the worktop, make sure to fix the protective plate or tape supplied with the dishwasher at the underside of the worktop.

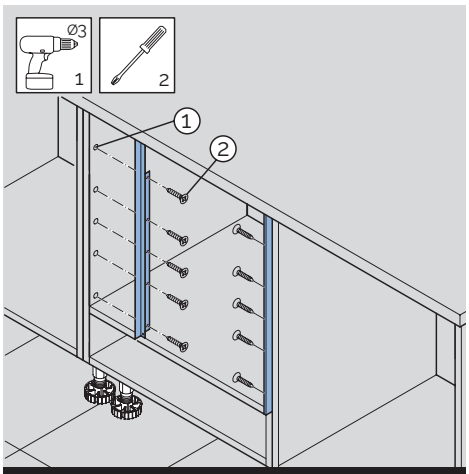

FITTING PROTECTION STRIPS OVEN HOUSING **MH 5.3**

MH 5.3

Oven housings with a recess of 600mm are supplied with heat protection strips. These strips will protect the adjacent fronts against heat emission.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

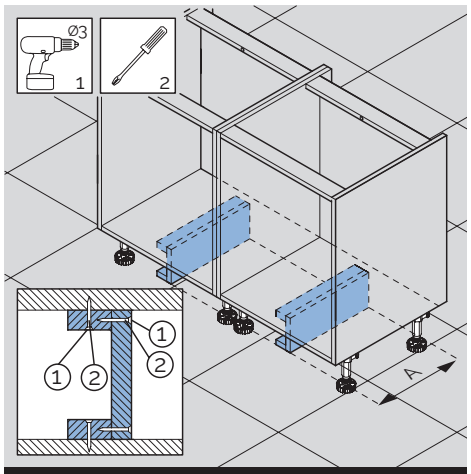

FITTING ROLLOVER PROTECTION FOR ISLAND RUN **MH 6.1**

MH 6.1

A freestanding island run always needs to be secured to the floor to avoid rolling over or moving over. Cut the supplied materials to size. Width A=250mm minimum. Suitable fixing materials are to be used for fixation onto the underlying floor/surface.

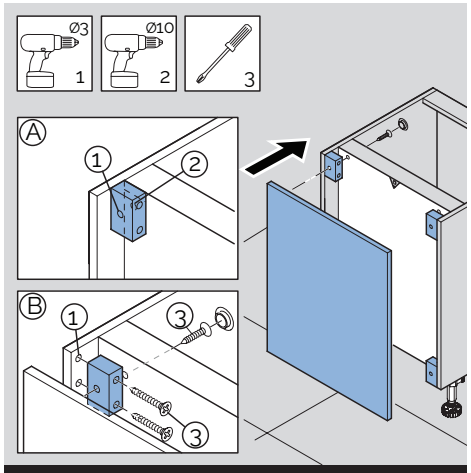

FITTING BACK PANEL ISLAND RUN **MH 6.2**

MH 6.2

Concealed fitting of the back panel onto the island run is to be done from the inside of the cabinet. Please make use of the wooden cubes as a mold to drill the hole through the back panel. Drill the hole in the back panel bigger to ø10mm (A).

Fix the cubes at the far back of the side gables of the cabinet.

Fix the panels from the inside and place a cover cap over the top of the screws (B).

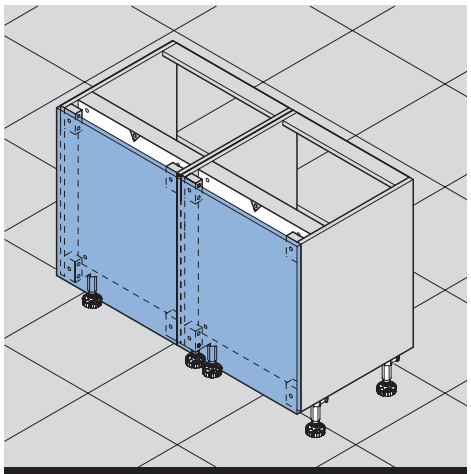

FITTED BACK PANEL ISLAND RUN **MH 6.3**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

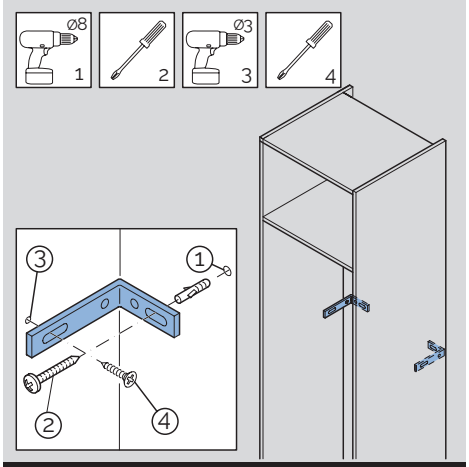

FITTING ROLLOVER PROTECTIVE TALL UNIT MH 7.1

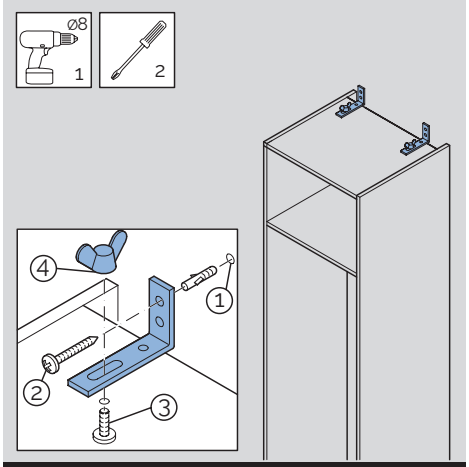

FITTING ROLLOVER PROTECTIVE TALL UNIT MH 7.2

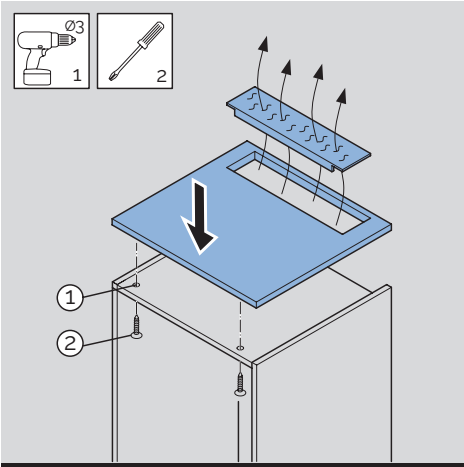

FITTING COVERING PANEL/ VENTILATION GRID MH 7.3

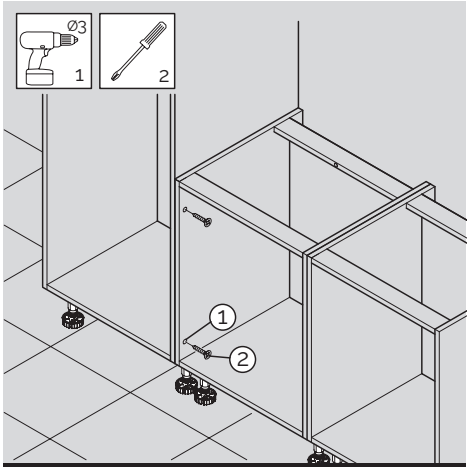

JOINING TALL UNIT – BASE UNIT MH 7.4

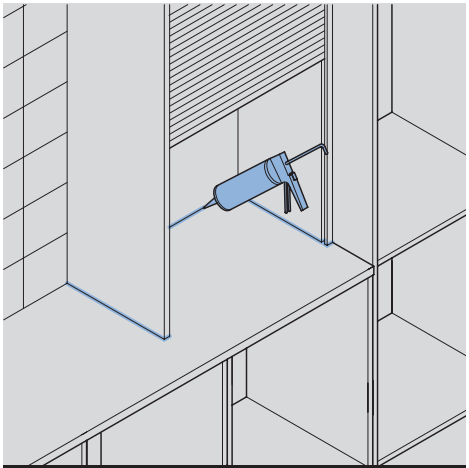

SEALING WORKTOP DRESSER UNITS ON WORKTOP MH 7.5

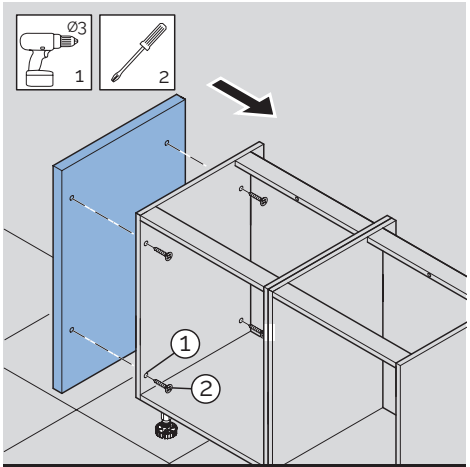

FIXING SIDE PANEL MH 7.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

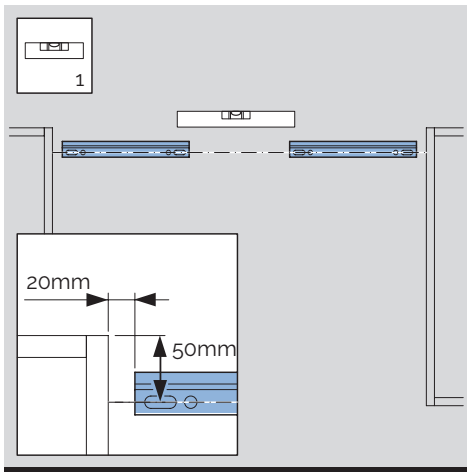

FIXING HANGING RAILS WALL UNITS **MH 8.1**

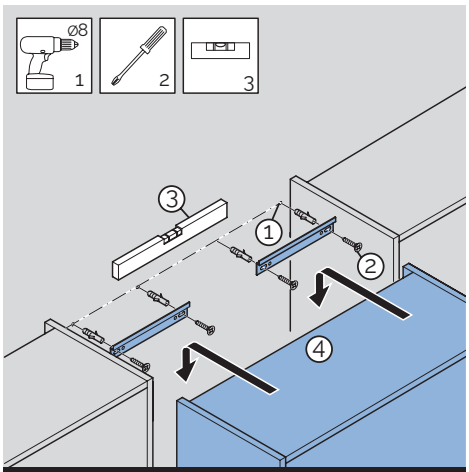

FIXING HANGING RAILS WALL UNITS **MH 8.2**

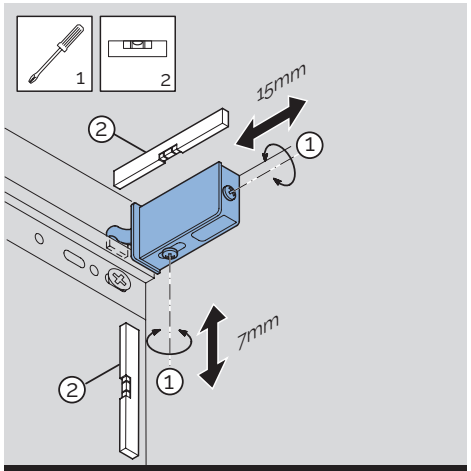

ADJUSTING WALL UNITS **MH 8.3**

MH 8.3

Suitable fixing materials are to be used for fixation onto the underlying surface. Make sure to turn out the adjusting screw to allow the hanging bracket to go behind the wall hook. Maximum weight wall units=110kg provided it is equally divided over the cabinet.

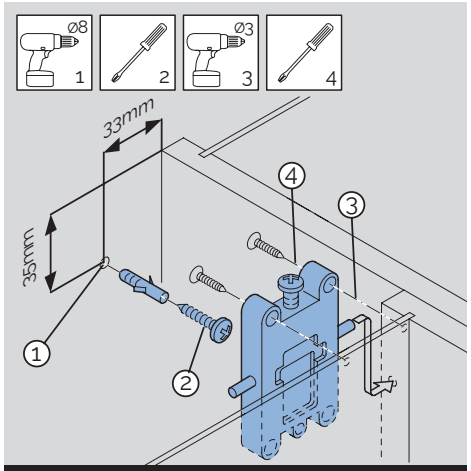

FIXING HANGING BRACKETS OPEN WALL UNITS **MH 8.4**

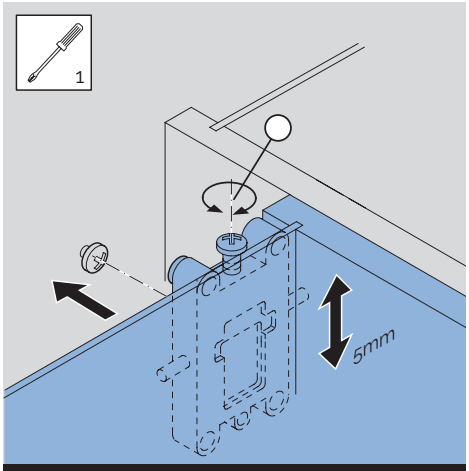

HANGING/ADJUSTING OPEN WALL UNIT **MH 8.5**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

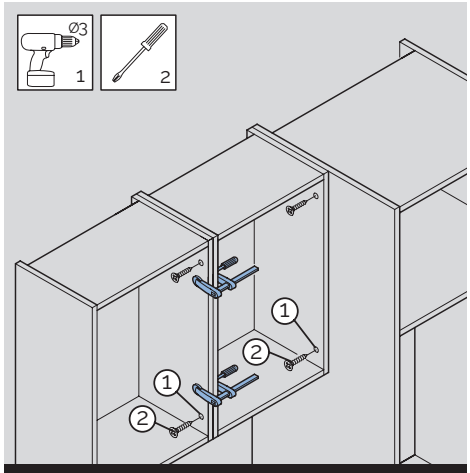

JOINING WALL UNITS **MH 9.1**

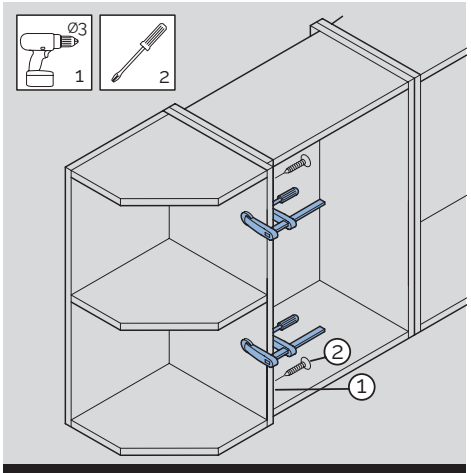

FIXING OPEN END UNIT **MH 9.2**

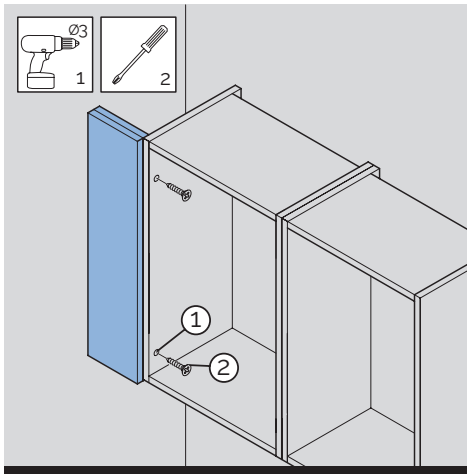

FITTING FILLER WALL UNIT **MH 9.3**

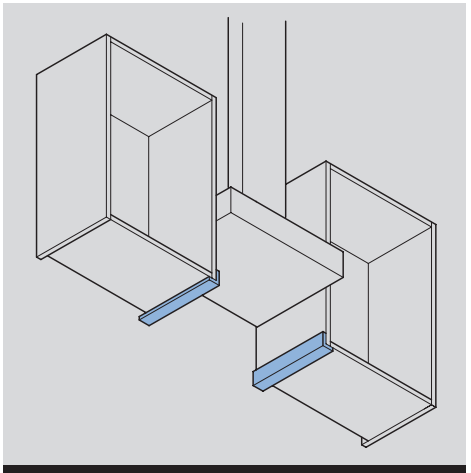

FITTING PROTECTION STRIPS COOKING VAPORS **MH 9.4**

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

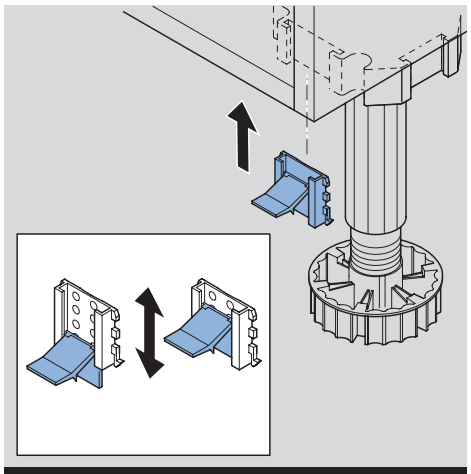

FITTING PLINTH STEP 1 MH 10.1

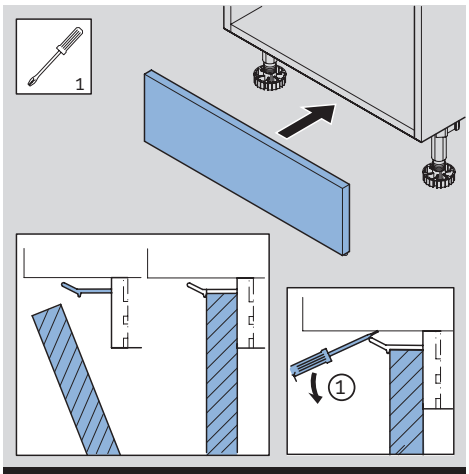

FITTING PLINTH STEP 2 MH 10.2

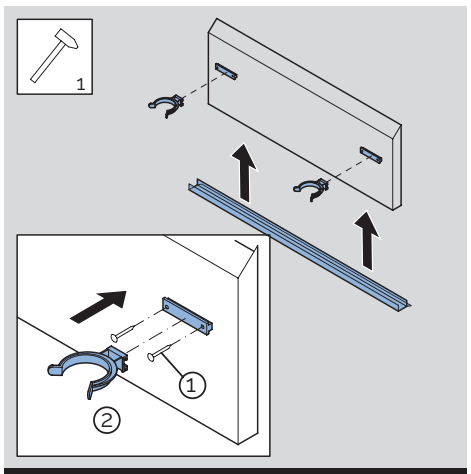

FITTING RETURN PLINTH STEP 1 MH 10.3

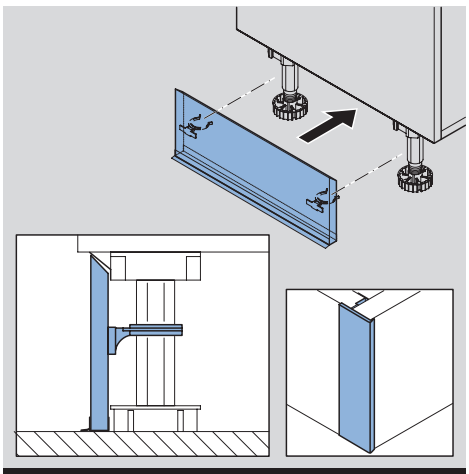

FITTING RETURN PLINTH STEP 2 MH 10.4

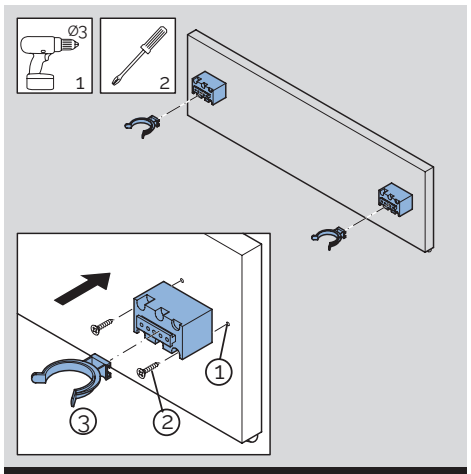

SHALLOW PLINTH NOTCH STEP 1 MH 10.5

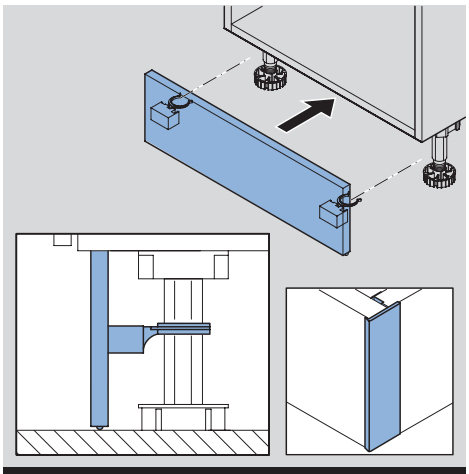

SHALLOW PLINTH NOTCH STEP 2 MH 10.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

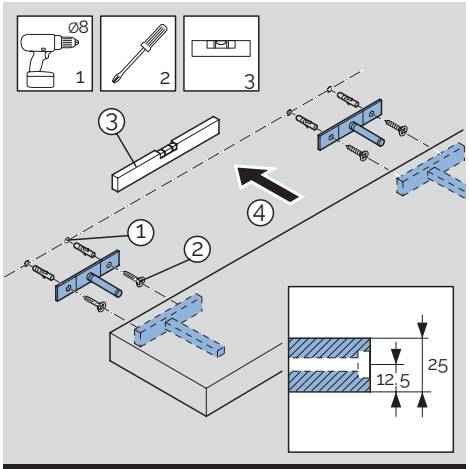

FIXING ADJUSTABLE STUDS FOR WALL SHELVES **MH 11.1**

MH 11.1

Suitable fixing materials are to be used for fixation onto the underlying surface.

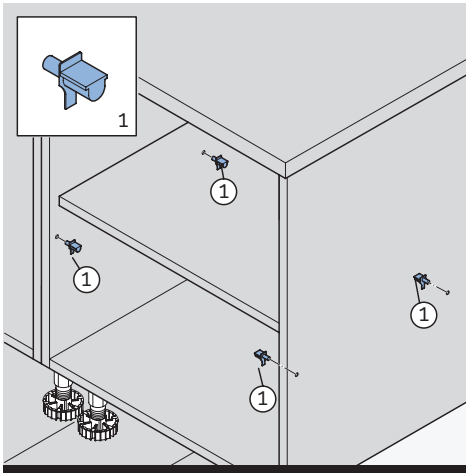

PLACING SHELF PEGS **MH 11.2**

MH 11.2

Place shelf pegs in holes inside the cabinet.

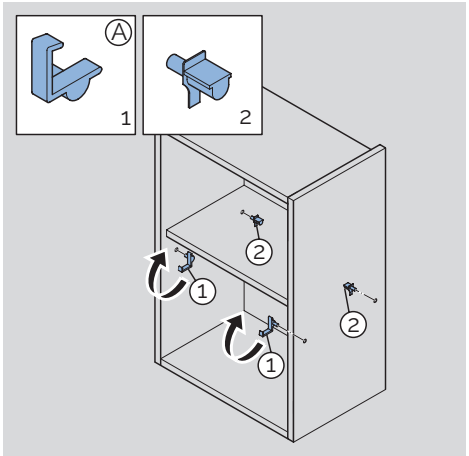

PLACING SHELF PEGS WITH ROLLOVER PROTECTION **MH 11.3**

MH 11.3

Place shelf pegs in holes inside the cabinet.
Place shelf onto the pegs en turn “hooks” on left and right hand side (A) around the shelf.

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

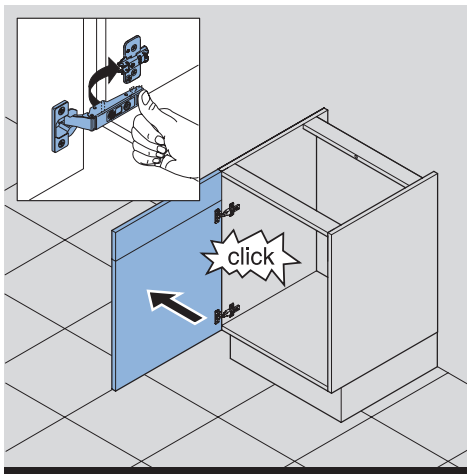

MOUNTING DOORS MH 12.1

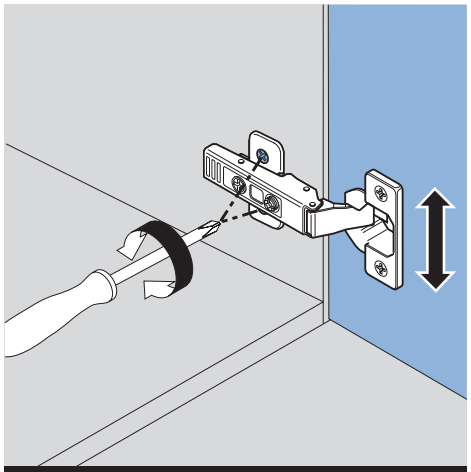

DOORS – HEIGHT ADJUSTMENT MH 12.2

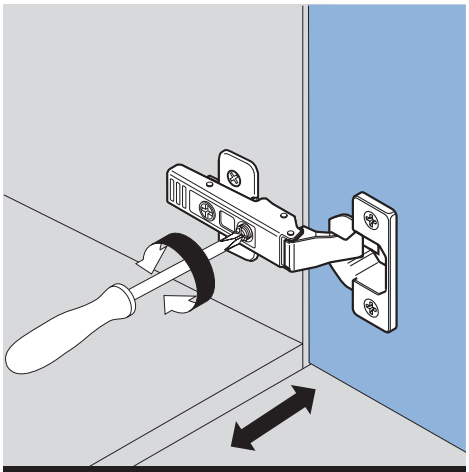

DOORS – SIDE ADJUSTMENT MH 12.3

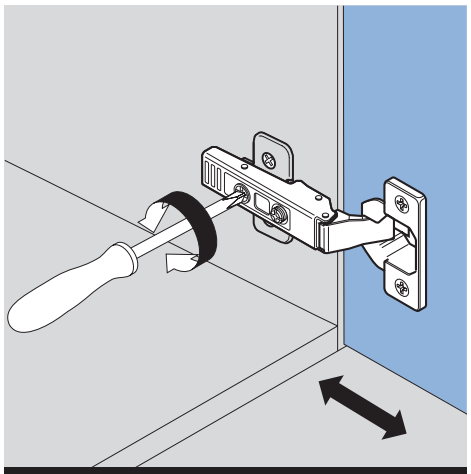

DOORS – DEPTH ADJUSTMENT MH 12.4

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

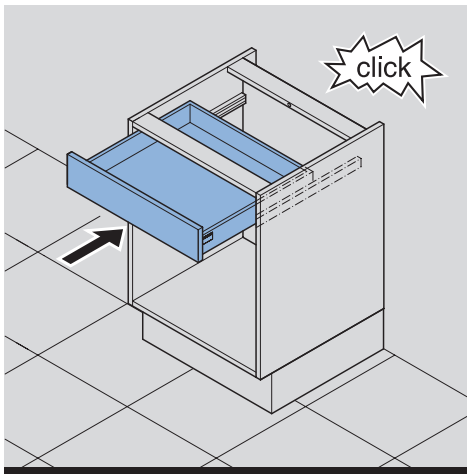

MOUNTING DRAWERS MH 13.1

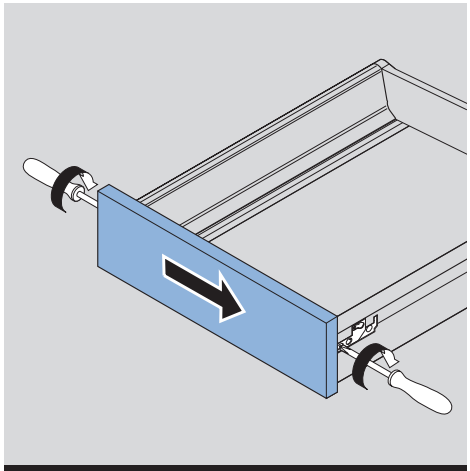

ADJUSTMENT DRAWERFRONT SIDEWARDS TO THE RIGHT MH 13.2

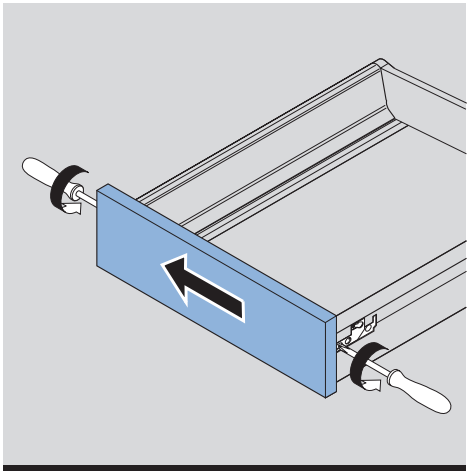

ADJUSTMENT DRAWERFRONT SIDEWARDS TO THE LEFT MH 13.3

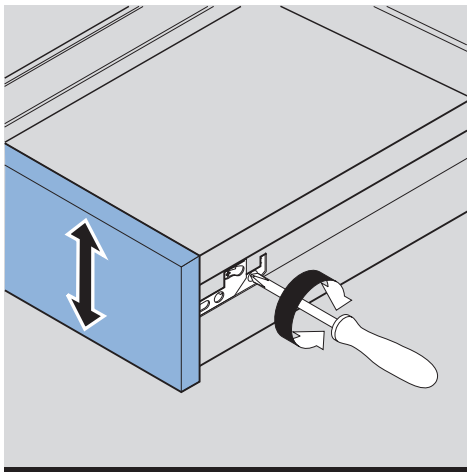

ADJUSTMENT DRAWERFRONT IN HEIGHT MH 13.4

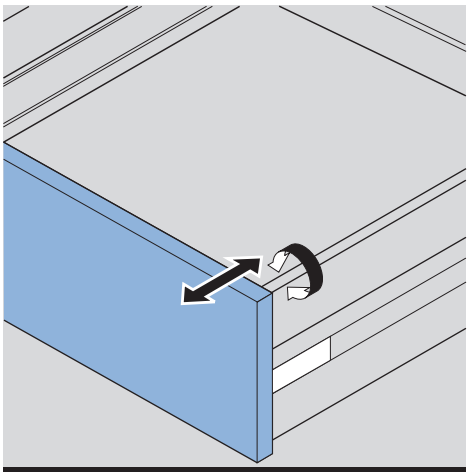

ADJUSTMENT DRAWERFRONT ANGLE MH 13.5

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

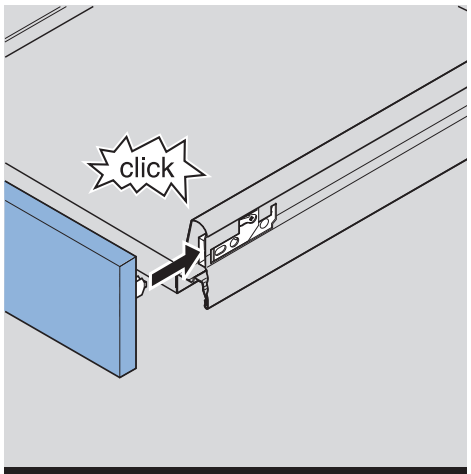

MOUNTING DRAWERFRONT MH 14.1

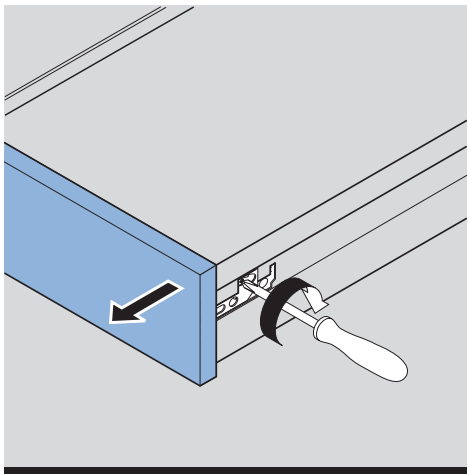

DISMOUNTING DRAWERFRONT MH 14.2

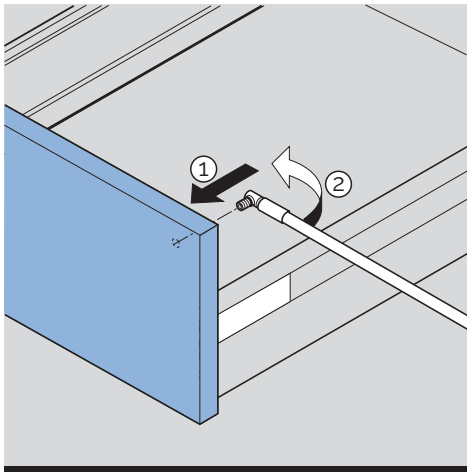

MOUNTING PANDRAWERFRONT AT FRONT MH 14.3

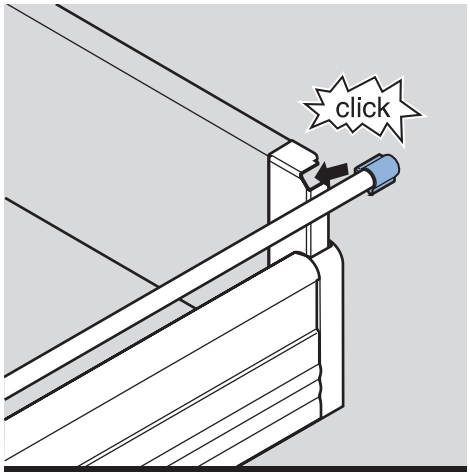

MOUNTING PANDRAWERFRONT AT BACK MH 14.4

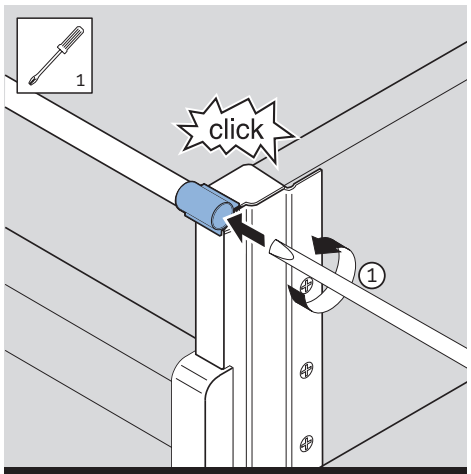

DISMOUNTING PANDRAWERFRONT AT BACK MH 14.5

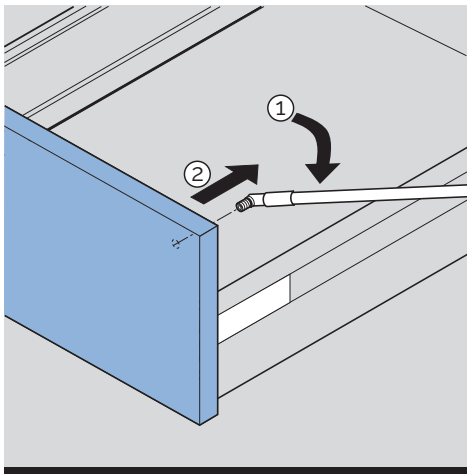

DISMOUNTING PANDRAWERFRONT AT FRONT MH 14.6

Instruction manual

INSTRUCTION MANUAL - PRODUCT DATASHEET

Maintenance and use

The manufacturer's warranty covers material- and construction defects. Please read this instruction manual carefully before using the kitchen.

MAINTENANCE

- Cleaning wooden, painted, foil, acrylic and melamine fronts are to be done with common household water soluble cleansing agents only. Do not use aggressive or abrasive detergents.
- Avoid excessive use of water during cleaning.
- Dry properly after cleaning to avoid water remaining in corners and seams.
- Stubborn stains can be cleaned with a synthetic detergent.
- Furniture polish and wax are not suitable.
- Do not use steam cleaners.
- Do not leave wet or moist cloths or mops lying on cabinet bottoms or shelves for a longer period. Avoid a longer period of penetration of moist.
- Worktops and sinks may be cleaned in the same manner, if needed by making use of a brush and/or fluid abrasive (not scouring powder). Do not use abrasive products such as cleaner, steel wool, scouring pads or scotchbrite.
- For maintenance and cleaning of appliances we refer to the regulations of the appliance manufacturers.

USE

- Do not place hot pans onto the worktop, always use coasters.
- We advise to always use a chopping board when cutting on the worktop.
- Never use coffeemakers, water boilers, etc. directly under the wall cabinets.
- Do not let an oven cool down with an open door and never leave the oven door open unnecessarily long.
- Never leave the cooking zone of a gas hob on without a pan on it.
- Never open the door of a dishwasher filled with hot steam.
- Gashobs and stoves placed next to a kitchen are to be placed 1 cm. above the worktop to avoid damage or fire hazard.

Adjusting the fronts and drawers and damages as a result of faulty use and maintenance are not covered by warrantee.

T.ONE
UNIVERSAL TRADING L.L.C

10

CERTIFICATION INCLUDING AUTHORIZED LETTER FROM MANUFACTURER FOR SUPPLY/ INSTALLATION/ APPLICATION OF PRODUCT

From: DKG International BV / Keller Kitchens BV

Drebbelstraat 35

4622 RC Bergen op Zoom

The Netherlands

Bergen op Zoom, 12 December 2025

To: Whom it may concern

Subject: Exclusive partnership confirmation – Keller Kitchens BV / DKG International BV

We, DKG international BV, part of Netherlands based DKG Holding BV, ("DKG/Keller" or "We" or "Our") hereby state as follows:

- We hereby confirm that our company has appointed Dubai based company **Tone Universal Trading LLC** as our exclusive business partner for the United Arab Emirates and the wider GCC region.
- Tone Universal Trading LLC will ensure the further growth and representation of our company in the region. The team of Tone Universal Trading LLC consists of highly skilled and experienced interior professionals and has been fully aligned with our company processes at the Dutch headquarters.
- Tone Universal Trading LLC will fully comply with the DKG/Keller Kitchens warranty.

We hope this statement provides you with sufficient information. We are looking forward to a successful relationship as your trusted kitchen supplier.

Yours Sincerely,

R.M.M. van Steen

Director dealers DKG Group

Certificate Of Registration

Awarded to

TONE UNIVERSAL TRADING

at

P.O.BOX NO. 393014, AL SAFA 1, DUBAI

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS & ISO standard requirements for registration of the management system standard detailed below:

ISO 9001:2015

Quality Management Systems

Scope of work

IMPORT, GENERAL TRADING, KITCHEN INSTALLATION

EA 28,29
Certificate No: ADU-2655
Originally Registered: 23 DEC 2025
Latest Issue: 23 DEC 2025
Valid up-to: 22 DEC 2026

Quality Registrar Systems

QRS ISO 9001: 2015 CERTIFIED

ASCB Accreditation Services Worldwide

QUALITY REGISTRAR SYSTEMS
P.O Box :26826
United Arab Emirates

Tel: +971-2-6714302
Tel: +971-2-3096166
www.qrsyst.com

WORLDWIDE CERTIFICATION

This certificate is the property of Quality Registrar Systems and remains valid subject to satisfactory annual surveillance audit.
This certificate is only valid when confirmed by the Register listed in Quality Registrar Systems (qrsyst.com)

Certificate Of Registration

Awarded to

TONE UNIVERSAL TRADING

at

P.O.BOX NO. 393014, AL SAFA 1, DUBAI

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS & ISO standard requirements for registration of the management system standard detailed below:

ISO 14001:2015

Environmental Management Systems

Scope of work

IMPORT, GENERAL TRADING, KITCHEN INSTALLATION

EA 28,29
Certificate No: ADU-5960
Originally Registered: 23 DEC 2025
Latest Issue: 23 DEC 2025
Valid up-to: 22 DEC 2026

Quality Registrar Systems

QRS ISO 14001 : 2015 CERTIFIED

ASCB Accreditation Services Worldwide

QUALITY REGISTRAR SYSTEMS
P.O Box :26826
United Arab Emirates

Tel: +971-2-6714302
Tel: +971-2-3096166
www.qrsyst.com

WORLDWIDE CERTIFICATION

This certificate is the property of Quality Registrar Systems and remains valid subject to satisfactory annual surveillance audit.
This certificate is only valid when confirmed by the Register listed in Quality Registrar Systems (qrsyst.com)

Certificate Of Registration

Awarded to

TONE UNIVERSAL TRADING

at

P.O.BOX NO. 393014, AL SAFA 1, DUBAI

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS & ISO standard requirements for registration of the management system standard detailed below:

ISO 45001:2018

Occupational Health and Safety Management Systems

Scope of work

IMPORT, GENERAL TRADING, KITCHEN INSTALLATION

EA 28,29
Certificate No: ADU-4245
Originally Registered: 23 DEC 2025
Latest Issue: 23 DEC 2025
Valid up-to: 22 DEC 2026

Quality Registrar Systems

QRS ISO 45001 :2018 CERTIFIED

ASCB Accreditation Services Worldwide

QUALITY REGISTRAR SYSTEMS
P.O Box :26826
United Arab Emirates

Tel: +971-2-6714302
Tel: +971-2-3096166
www.qrsyst.com

WORLDWIDE CERTIFICATION

This certificate is the property of Quality Registrar Systems and remains valid subject to satisfactory annual surveillance audit.
This certificate is only valid when confirmed by the Register listed in Quality Registrar Systems (qrsyst.com)

CERTIFICATE

Certificate
K-0216953/ 1 C

Issued on	***2024-04-01***	**Page**	***1* of *1***
First issue	***1997-10-13***	**Valid until**	***2027-03-31***
Replaces	***KSC-K11580/12 C***		

ISO 9001:2015

With this certificate Kiwa confirms that the management system implemented by

Keller Keukens B.V.

meets the requirements of ISO 9001:2015 for the scope:

Design, producing and supply of kitchens.

Ron Scheepers
Country manager Kiwa Nederland

20220221

Consult www.kiwa.com in order to ensure that this certificate is still valid.

Kiwa Nederland B.V.
Sir Winston Churchilllaan 273
Postbus 70
2288 AB RIJSWIJK

Tel. +31 88 998 44 00
Fax +31 88 998 44 20
info@kiwa.com
www.kiwa.com

Company details
DKG Holding B.V.
Drebbelstraat 35
4622 RC BERGEN OP ZOOM
THE NETHERLANDS
KVK 20047386

Operating Company
Keller Keukens B.V.
Drebbelstraat 35
4622 RC BERGEN OP ZOOM
THE NETHERLANDS
KVK 20026770

MGMT. SYS.
RvA C 025

CERTIFICATE

Certificate
K-0216954/ 1 C

Issued on	***2024-04-01***	**Page**	***1* of *1***
First issue	***1999-09-17***	**Valid until**	***2027-03-31***
Replaces	***MSC-K14234/09 C***		

ISO 14001:2015

With this certificate Kiwa confirms that the management system implemented by

Keller Keukens B.V.

meets the requirements of ISO 14001:2015 for the scope:

Design, producing and supply of kitchens.

Ron Scheepers
Country manager Kiwa Nederland

Consult www.kiwa.com in order to ensure that this certificate is still valid.
This certificate is part (and depends on the validity) of the main certificate K-0216954/ 1.

20220221

Kiwa Nederland B.V.
Sir Winston Churchilllaan 273
Postbus 70
2288 AB RIJSWIJK

Tel. +31 88 998 44 00
Fax +31 88 998 44 20
info@kiwa.com
www.kiwa.com

Company details
DKG Holding B.V.
Drebbelstraat 35
4622 RC BERGEN OP ZOOM
THE NETHERLANDS
KVK 20047386

Operating Company
Keller Keukens B.V.
Drebbelstraat 35
4622 RC BERGEN OP ZOOM
THE NETHERLANDS
KVK 20026770

MGMT. SYS. RvA C 025

SCCM
stichting coördinatie certificatie managementsystemen voor milieu en gezond en veilig werken

CERTIFICATE

Certificate
K-0220030/ 1 B

Issued on	***2024-10-09***	**Page**	***1* of *1***
First issue	***2018-10-09***	**Valid until**	***2027-10-08***
Replaces	***K97542/02***		

CSR Performance Ladder
Level 4

Kiwa has determined, in accordance with the Corporate Social Responsibility Performance Ladder, version 01-03-2020, that the system used by

Keller Keukens B.V.

to manage the development and implementation of CSR policies on CSR themes in consultation with stakeholders in the technical sector 1 comply for the scope:

Design, production and delivery of kitchens.

Ron Scheepers
Country manager Kiwa Nederland

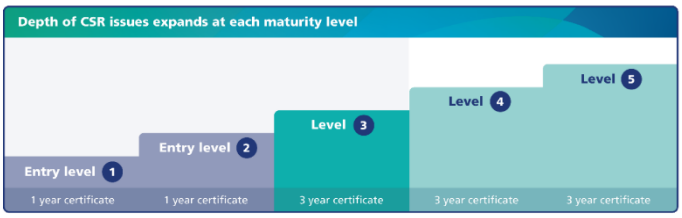

The CSR Performance Ladder and this CSR certificate are registered on the website www.mvoprestatieladder.nl. Consult this website or www.kiwa.com to ensure that this certificate is still valid. This certificate is part (and depends on the validity) of the main certificate K-0220030/ 1.

20240103

Kiwa Nederland B.V.
Sir Winston Churchilllaan 273
Postbus 70
2288 AB Rijswijk

Tel. +31 88 998 44 00
Fax +31 88 998 44 20
info@kiwa.com
www.kiwa.com

Company details
Keller Keukens B.V.
Drebbelstraat 7
4622 RC BERGEN OP ZOOM
THE NETHERLANDS
KVK 20026770

CSR Performance Ladder

CERTIFICATE

Certificate
K-0212213/ 3 B

Issued on	***2024-10-24***	**Page**	***1 of 1***
First issue	***2018-04-01***	**Valid until**	***2026-07-11***
Replaces	***K-0212213/2 B***		

CO_2-Awareness Certificate, level 5
Type: Medium Company

With this certificate Kiwa confirms that the management system implemented by

Keller Keukens B.V.

meets level 5 of the Handbook CO2 Performance Ladder version 3.1 dated 22 June 2020 for the following scope:

Design, production and delivery of kitchens.

Ron Scheepers
Country manager Kiwa Nederland

Consult www.kiwa.com in order to ensure that this certificate is still valid.
This certificate is part (and depends on the validity) of the main certificate K-0212213/ 3.

Kiwa Nederland B.V.
Sir Winston Churchilllaan 273
Postbus 70
2288 AB RIJSWIJK

Tel. +31 88 998 44 00
Fax +31 88 998 44 20
info@kiwa.com
www.kiwa.com

Company details
Keller Keukens B.V.
Drebbelstraat 7
4622 RC BERGEN OP ZOOM
THE NETHERLANDS
KVK 20026770

Organisational Boundary
Keller Keukens B.V., KVK 20026770 - NACE 31.02

MGMT. SYS.
RvA C 025

20230224

T.ONE
UNIVERSAL TRADING L.L.C

11

EHSS REQUIREMENTS RELATED TO RISK ASSOCIATED WITH SERVICES OFFERED

T.ONE
UNIVERSAL TRADING L.L.C

HSE Manual

H S E MANUAL - INDEX

Sr.no	Names	Page nos.
1.	Scope , Objectives of Safety Plan and QHSE policy	3
2.	Terminology And Definitions	7
3.	Management Responsibilty	9
4.	Safety Responsibilities.	12
5.	Leadership and Adminisatration	15
6.	HSE Procedures	19
7.	Planned Inspection and Audit of the System	68
8.	Accident /Incident And Analysis,Reporting Procedure	70
9.	Personnel Protective Equipment	74
10.	Health and Medical Fitness	78
11.	Toxic and Hazardous Material Control	80
12.	Environment Protection	82
13.	Waste Management Plan	91
14.	Safety of Subcontractor Personnel and Equipments	109
15.	Equipment Control and Maintanance	113
16.	Emergency Procedures and First Aid.	115
17.	Evacuation Procedure	119
18.	Risk Management	123
19.	Permit to Work System	125
20.	Risk and Hazard Assessments	127
21.	Safety Training Requirements.	176
22.	Site Electricity Management Plan	179
23.	Housekeeping and Site Tidiness.	183
24.	General Safety Rules	185
25.	Project Safety Coordination Plan	188
26.	Site Fire Plan	190
27.	Transport to Buildings	195
28.	Site Traffic Management Plan	198
29.	Risk Assessment Log	200
30.	Forms and Formats	202

01. Scope , Objectives of Safety Plan and QHSE Policy

The scope of the plan covers the site activities of all abm staff and operatives, subcontractors, suppliers, and visitors. It also extends to the duty of care required to ensure that members of the consultants team, other contractors staff and the general public are safe guarded and protected from risks and hazards arising from the building process.

The Safety Plan Has Three Functions.

- To establish the safety management structure for the project.
- To define the responsibilities for each person having safety duties.
- To identify arrangements to minimise risk

***

QHSE Policy

At TONE UNIVERSAL TRADING we are committed to delivering excellence while ensuring the highest standards of quality, health, safety, and environmental (QHSE) management. Our goal is to enhance operational efficiency, safeguard our workforce, and minimize environmental impact through sustainable and responsible practices.

Our Commitments:

- **Quality Excellence**: We maintain structured processes, rigorous monitoring, and continuous improvement to exceed client expectations and uphold the highest industry standards.
- **Health & Safety Priority:** The well-being of our employees, contractors, and stakeholders is paramount. We implement robust safety protocols, conduct risk assessments, and provide regular training to ensure a secure work environment.
- **Environmental Responsibility:** We integrate sustainable practices, optimize resource utilization, and implement waste reduction measures to minimize our ecological footprint.
- **Regulatory Compliance:** We adhere to all applicable local and international regulations, continuously monitoring evolving standards to ensure full compliance across all operations.
- **Continuous Improvement**: We foster a culture of innovation and proactive enhancement, regularly reviewing performance metrics and incorporating stakeholder feedback to optimize processes.
- **Risk Management:** We identify, assess, and mitigate potential risks to ensure the safety, quality, and sustainability of our operations.
- **Employee Training & Development:** We invest in comprehensive training programs, equipping our workforce with the skills and knowledge necessary to uphold our high standards.
- **Transparent Communication:** We prioritize open dialogue with stakeholders, fostering trust, collaboration, and shared commitment to QHSE principles.
- **Sustainable Operations:** We implement energy-efficient practices, responsible waste management, and resource conservation strategies to support long-term environmental stewardship.
- **Proactive Safety Approach:** We emphasize hazard identification, regular safety drills, and preventive measures to ensure the protection of all personnel and assets.

This policy is communicated across all levels of the organization and regularly reviewed for continuous improvement. By adhering to these principles, TONE UNIVERSAL TRADING remains dedicated to delivering safe, high-quality, and sustainable solutions while fostering a culture of responsibility and excellence.

Date: 11 December 2025

Authorized signature

02. Terminology and Definitions

The terminology used in this manual have the following meaning unless indicated otherwise.

A) **Safe** : A situation is categorized as safe if its risks are known and judged to be acceptable.

B) **Accident** : An unplanned event which has the probability of causing personal injury or property damage or damage to environment.

C) **Incident** : All undesired events or circumstances including 'near misses having the potential to cause accidents.

D) **Hazard** : A condition with the potential of causing an accident.

E) **Risk** : The likelihood that a specified undesired event will occur due to the realization of a hazard by – or during work activities , or by the products an services created by the work activities

F) **HSE** : Health, Safety and Environment .

G) **PPE** : Personal Protective Equipment

H) Reference to site Supervisor implies the immediate supervisor on site, the Engineer , Forman or the Charge-hand , as applicable in a given situation.

***

03. Management Responsibility

The company management believe that pursuit of high standard of health, safety and a positive approach towards protecting environment is an integral part of efficient management in the construction industry.

The ultimate aim of the company management is to have accident free projects. To this objective , The following means will be employed:-

- All employees will be trained and made aware of the company ‘s HSE requirements and that of the project. The employees will Participate in all mandatory courses provided by the client
- HSE performance will be monitored throughout the project, the statistics will be reviewed and efforts will be made towards continuous improvement.
- All construction activities will be carried out using efficient and safe work practices – clear construction plans , method of work and safety guidelines.
- Hazard identification and risk assessments will be carried out on a regular basis and necessary control measures will be implemented. This will be done first on a project basis and once system measure, all activities will be subject to risk assessment.
- All candidates and incidents will be investigated and reported to management, client and where applicable, to the government authorities.
- Management would welcome all constructive ideas and suggestions towards improving HSE performance.
- Focus on incremental improvement on a continuous basis.
- HSE objectives will be established on a yearly basis, achievements highlighted and monitored.
- All necessary resources and support will be extended by management .
- The typical organization for management of health, Safety and environment issues is attached. Ref. HSE organization chart and company organization chart. Specific HSE responsibilities in projects are documented in the HSE plans developed for the projects.
- The brief responsibilities of key personal towards attainment of HSE Objectives are:-
  The general manager is responsible for all matters relating to health, safety and environment within the company. He delegates this responsibility to the HSE management Representative / HSE Coordinator, who is over all responsible for establishing, coordinating , monitoring and maintaining the health, safety and environment activities for all company construction projects.
- The HSE Management representative / HSE Coordinator is responsible to ensure HSE Documentation is valid, standard operating procedures are developed , HSE audits are conducted and advise mManagement of improvements required for effectiveness.

***

- Each Project Manager, is responsible for ensuring that the policy is effective and fully understood by on employee on his site. He is also overall responsible for ensuring the HSE Management system is implemented and all safety statistics are recorded and reported to the General Manager.

- The safety officer on site (or his designate) is responsible for the day-to-day safety inspections , Training and monitoring of the safety activities on the site.

- All employees are responsible to comply with the HSE policy of the company and all applicable client rules and regulations on the site they work. They shall report any unsafe acts and conditions and co-operate at all time which management to prevent accidents. They are also responsible to wear personal protective equipment, as issued to them and shall not misuse tools and equipment.

***

04. Safety Responsibilities

Safety Responsibilities *(CONTD.)*	
JOB TITLE	**SAFETY RESPONSIBILITIES**
Construction Manager / Asst. Cons. Manager	Responsible for the implementation of safety procedures by nominated and domestic subcontractors. Responsible for the day-to-day safety of all site operatives, the site and immediate environs and for the safe execution of the temporary and permanent works under his control. Acting upon the advice/ instruction of Construction Manager and Safety Officer regarding Health and Safety measures. Ensure that in-line supervision is instructed in the correct method to carry out operations. Instruct subcontractors work force in the correct method to carry out operations, to ensure the operatives carry out the works in a safe manner and without placing themselves at risk or endangering others. Ensure operatives are equipped with the appropriate personal safety equipment and that all equipment are used in safe condition with any necessary guards fitted. Ensure adequate and appropriate equipment is available / deployed to ensure safe working conditons.Institute correct housekeeping practices.
Sr.Proj.Engineer	Set personal examples to work force.

Safety Responsibilities *(CONTD.)*	
JOB TITLE	**SAFETY RESPONSIBILITIES**
General Foremen	Ensure adequate labour is assigned to specific tasks. Restrain employees from taking unnecessary risks, especially at height. Carry-out site staff and labourers tool box talk(weekly) and submit attendance sheet to Safety Dept. Ensure that all equipment is safe for use and is used correctly, especially safety harness and is within the safe working life period.
Storekeepers	Ensure that material handling (inwards and outwards) is carried out in a safe manner using correct equipment. Ensure that the stores layout provided meet the needs of the Project. Monitoring receipt of materials especially potentially dangerous goods. Ensure correct storage is provided / utilised To ensure that power tools and equipment are in a safe condition and are fitted with guards when issued to site. Any hired Equipment / plant etc. should have proper working instructions and safety certificates as required.
Male Nurse / First Aid Attendant	Ensure proper first aid treatment facilities are available at site with neat and clean and with open access. He will coordinate with site administration officer for emergency transport to hospitals and with procurement department for the purchase of first aid items.

***

05. Leadership and Administration

Introduction

Effective leadership and program administration are vital to the success of safety, health and environment –loss control program. Management leadership lays the foundation upon which a sold program is built and reflects management commitment in its implementation.

Policy Support

The management support to the 'COMPANY HSE POLICY' will be demonstrated by periodic letters and memorandums (or any other suitable medium) on HSE matters and the HDE policy would be displayed at prominent places in offices and sites.

Inspection Tours

Inspection Tours are conducted by the Genaral Manager / Asst Genaral ManagerProjects , The Construction Manager , and the safety officer at a frequency not less than listed in the table below. "The General Inspection Check list" rerf. From HSE-F-3, will be use to assist management in tour preparation and reporting of the same to the concerned site / safety officer.

Inspection Tours	Frequency
Genaral Manager	Every 3 months
Asst Genaral Manager/CM	Every month/Twice a week
Safety Officer	Once in a week

Group Meetings

The group meeting ensure the safety, health and environment topics are discussed during Management, Department site Meetings. Accident and Near Miss Incidents and the subsequent corrective and preventive action taken. The site supervisor along with the safety officer shall conduct group meeting every month. The number of meeting will depend up on the number of people working on any given site. Ref. From HSE-F-6.

HSE Audits

Planned audit of the system will be conducted at intervals defined by management and as per specific contract requirements. Ref. From HSE-F-7

Safety Awards

Safety Man of the Month Award and an award for reporting of Near Misses / potential hazards / new ideas will be used to motivate people and encourage and increase safety awareness on sites.

***

06. HSE Procedures

T.ONE UNIVERSAL TRADING LLC

HSE PROCEDURES

I N D E X

NO.	TITLE
1	General Safety Rules
2	Use Of Personal Protective Equipment
3	What To Do In An Accident/Near Miss
4	Driving
5	Equipment And Machinery
6	Compressed Air
7	Hand And Power Tools
8	Electrical Equipment
9	Compressed Gas Cylinders
10	Scaffolding & Ladders
11	Gas Cutting
12	Grinding
13	Pressure Testing
14	Cable Drum Handling
15	Cable Pulling
16	Cable Laying And Termination
17	Excavations
18	Working At Heights
19	Cranes And Handling
20	Housekeeping
21	Fire Prevention
22	First Aid
23	Environment Protection
24	Work Permit System
25	Welding & Cutting
26	Sand And Shot Blasting
27	Painting
28	Loading / Unloading Of Heavy Equipment
29	Fall Protection And Overhead Works
30	Employee Training and Communication

01. Always check your work area for possible hazards before starting work.

02. Always ensure that your equipment's and tools are in good working condition Replace any broken tools or equipment.

03. Are you working safely?

04. Remember you are responsible for your own safety and any other person that may be affected by your actions.

05. Continues to work safety even if your supervisor is not present.

06. If you are required to push for more production, you must increase your safety effort.

07. Observe all warning & notice signs.

08. Ensure that you receive a safety induction session when you first arrive on site.

09. Never Indulgence in practical jokes, horseplay, scuffing, wrestling or fighting the work place.

10. Never destroy or tamper with safety devices, signs and equipment or willfully or unnecessarily discharging a fire extinguisher.

11. Never use any equipment that you are not fully trained or authorized to operate.

12. .Never sleep in work place.

13. In oil fields smoking or carrying matches or lighters within restricted areas is prohibited. And site smoking areas shall be covered with a smoking permit.

14. In oil fields never take any prohibited items such as video, camera, alcohol, poisonous substance, knife or other weapon with you.

15. Never be afraid to ask or inquire.

01. All employee of the company will be issued with the appropriate personnel protective equipment. This is as standard, will include safety shoes, coverall, safety helmet and hand gloves.

02. Employees shall wear clothing suitable for the weather and working conditions. The minimum requirement for site work shall be a short sleeve shirt, long trousers, safety helmet and protective footwear.

03. Loose or torn clothing, tail top shirts, sandals or tennis shoes prohibited on the site work areas.

04. When you are instructed to conduct an activity that requires the use of additional protective equipment, this will also be provided by the company. This will include such equipment as safety harness, dust mask, eye glasses, ear protection, Wellington boots, rubber gloves, life jackets, etc.

05. Make sure that the PPE offers adequate protection for the job in hand.

06. Follow any special instructions for the use of PPE.

07. Keep your PPE clean & tidy and report any defects to your supervisor.

08. Wear ear protection when working in area where noise levels are above the 85db level.

Following protective gear will be worn –

Head Protection
Safety helmets must be worn in all areas expect areas devoid of skull injury hazards.
Hand Protection
Gloves of appropriate type and in good condition must be worn to prevent damage to hands.
Foot Protection
Adequate footwear which provides protection against crushing or contamination by dangerous substances will be issued. The footwear should have a spark-proof, corrosion resistant sole and heel providing a good non-slip grip.

Body Protection

For normal day-to-day work body protection such as overalls shall be issued. These are adequate to provide protection against dirt, grime, small oil splashes, minor abrasions and burs etc. standard blue overalls are to provided for all personnel.

For dealing with caustic, corrosive or acid substances the safety inspector shall issue a resistant suit.

Eye Protection

Eyes can be damaged by dust particles, fumes, liquids and certain types of light. Protection may take the form of:

- Shatter- proof spectacles
- Various types of goggles
- Face shields
- Various types of tinted glasses

Ear Protection

Protection against hearing damage must be worn in noisy areas. Noises do not have to be loud to be a hazard and any noise which causes discomfort or a bulling of the hearing is to be guarded against.

Wherever hear protection notices are displayed, personnel will wear hearing protection without fail.

PROTECTIVE EUIPMENT

Safety Belts Lifelines

Where a persons worksite is such that fall into the sea (ie, at marine terminals) or fall more than 2 meters and it is not practicable to provide fencing, safety nets or sheets, that person shall be issued with a suitable safety belt which, together with its lines, fittings and anchorages, is constructed to prevent serious injury to that person in the event of his falling.

Cont....

Any person entering a continued space where is a deficiency or oxygen, or which contains toxic, or noxious gasses, will be fitted with a safety belt and lifeline, in addition to breathing apparatus.

The free end of the safety line shall be under the control of a second person, safety positioned outside the confined space, who will keep the wearer under constant surveillance and ready to withdraw him immediately, should the necessity arise.

Line will be examined every three months, after operation use or drill and at other times as considered necessary.

Contractor will provide such suitable equipment to all their employees prior to entering the site, and at all times ensure that it is used as intended when working.
Should the job call for specific safety equipment e.g. breathing apparatus sets or special protective gears, these will be provided.

***

1. Any person who sustains or witness an accident or incident shall report the fact immediately to the supervisor in charge of this week.

2. All accident that result in damage to any vehicles, plant equipment or properly shall be immediately reported to the site supervisor.

3. All incident in which damage was prevented by circumstances or deliberate preventive action (near miss) shall be immediately reported to the supervisor. It is important that they are reported in order to prevent a similar recurrence that could result in a serious accident.

4. Remove the injured person from the scene of the accident, ONLY if a dangerous situation still exists.

5. Always memorize the area emergency telephone number.

6. Remember your action in the event on an accident may save someone's life.

7. When an accident occurs, always stay claim. Raise the alarm get medical help IMMEDIATELY. If trained, give first aid to the injured person.

8. .REMEMBER for every

1	MAJOR ACCIDENT , there are
10	MINOR ACCIDENT , there are
30	PROPERTY DAMAGES , there are
600	NEAR MISSES

To prevent Major accident , therefore
Don't Hesitate to Report any Near Miss

***

1. All company employees who drive a motor vehicle on UAE shall be in possession of driving license valid for the class of vehicle they are driving.

2. Every driver shall familiarize himself with the UAE Traffic regulation, Traffic signs, Speed limits and shall be observed.

3. Vehicle being Used to transport personnel shall be fitted with hand rails and seats.

4. Personnel are forbidden to sit on body sides on the gate or standing in a vehicle is in motion.

5. If you are carrying goods ensure that they are properly manifested, labeled packed and secured.

6. Engine of vehicle shall be stopped before fuel loading or discharging Takes places.

7. When tripping your lorry make sure no is behind first.

8. Never use dampers or excavating equipment for carrying passengers.

9. Every vehicle accident shall be reported immediately to the police authority and company safety officer.

10. If the emergency alarm sound while you are driving , stop, switch off the engine and reported to the nearest marshalling point.

11. Never park your vehicle near fire hydrants or fire point.

12. In the event of an accident , it is the drivers responsibility to.
    - Ensure the vehicle is not moved.
    - Contact traffic police.
    - Contact company safety officer.

***

1. All equipment's shall be operated, by fully trained and authorized persons.
2. Engine of equipment shall be stopped before refueling.
3. The operator of equipment and machinery will ensure that safety equipment provided with the equipment or machinery, is utilized and maintained. Never remove any guard protection from equipment.
4. The of any equipment or equipment or machinery, will ensure that equipment or machinery that he is using, is properly serviced fueled, oiled, and cleaned as required. He will report any problems with the equipment or machinery to his supervisor or machine. IMMEDIATELY it become apparent.
5. The operator of equipment or machinery, will ensure that his action will not endanger the safety of other persons working nearby.
6. Approved correct P.P.E shall be worn by operators and assistants when using the equipment or machine.
7. Keep emergency stop button clean and unobstructed at all times.
8. Learn how to stop the machine in an emergency.

***

1. Air hose connection shall be secured to prevent hoses from whipping under pressure due to accidental separation.
2. Shut off the air supply and bleed off the pressure before disconnecting the hose.
3. Always use the proper hose connectors, never use jubilee clips
4. Never use the compressed air.

***

1. Use the correct tool for the job in hand , never use a spanner as a hammer.
2. Use spanner that fit the nut or the bolt head properly.
3. Keep your hand behind the cutting edge when using cutting tools.
4. When using rotating power tools such as grinders and circular saws , the operator will ensure that all other persons working in the same area as he is working, are not affected by the noise ,Pollution or eye hazard that is action may cause. Screens will be erected as required. The operator must be aware of his surroundings when operating power tools.
5. Keep your tool in good condition and stored properly after finishing work.
6. Report any damage or defective tools to your supervisor.
7. Were the suitable protection when using power tools.
8. Store tools , cable and hoses in a safe and tidy fashion.
9. Never lift a power tools by their cables or hoses.
10. Guard the circular saw and push stick to cut the same small pieces.

***

01. Electrically powered equipment shall be grounded at all times when in use.
02. Keep switch boards access clear at all times, in case isolation is required in an emergency.
03. Only fully trained persons may use electrically operated tools.
04. Never place material or construction items in front of electrical switches or upon electric cables.
05. Switch off the switch before removing or inserting the plug.
06. Operating switches or levels that require constant manual pressure to activate power tools shall not be tampered with or modified in order to make the tools easier to operate.
07. Keep scaffolding poles, crane & ladders well away from overhead wires.
08. No unauthorized person's shall temper with electrical installation, only authorized and qualified electricians shall repair, adjust or install electrical equipment's.
09. Never jump wires in sockets with matches stick or nails.
10. Only approved types of electrical extension cables shall be used on the site.
11. Welding cables shall be terminated and sliced in a proper manner.
12. Report any broken, ineffective or damaged electrical equipment to your supervisor and ensure that no one can come into contact with such equipment until it is repaired.

General Safety Precautions

The need for electrical isolation of equipment or a section of line will be determined by the Electrical Engineer.

Work on either low-tension or high tension systems must be carried out in conformance with the work permit procedure and the electrical isolation permit.

The following safety precautions will be observed:

a) All electrical installations must conform to the relevant safety standards, and all machinery and equipment must be effectively earthed.
b) All electrical work must be done by suitably qualified electricians.
c) Electrical cables must be adequately insulated and protected against mechanical damage.
d) The condition of the insulation between live/neutral and live/earth conductors, and the resistance of the earth circuit shall be checked at last once a year.

e) Circuit breakers and fuses must be correctly selected. Fuses must be inserted in the live conductor and replaced, when reputed, by another of the same rating but only after determining and rectifying the cause. The operation of circuit breakers should be checked regularly. A fuse must never be inserted in the neutral conductor.
f) All electrical apparatus must have adequate air circulation around it to prevent overheating.
g) Checking by touch to determine whether a motor or generator is running hot must only be done with the back of the hand. In case of shock, the hand is then thrown away from the machine.
h) In zone I hazardous areas all electrical apparatus must be intrinsically safe, pressurized or flameproof.
i) Portable electrical appliances should be all-insulated or double-insulated and must be inspected at least weekly.
j) Working live lines must be avoided wherever possible. If it is absolutely unavoidable only electricians trained to work in maximum safety under rubber boots and gloves shall be permitted using rubber mats and insulating screens.
k) All electrical equipment, insulated tools, rubber gloves, mats and screen must be inspected and tested at regular intervals and replaced if damaged or faulty.
l) The contractor is responsible for the safety of his electrical installation. Inspection must be carried out by an authorized competent electrician assigned by the contractor.

Electrical Equipment in Classified Area

To establish degrees of explosion and/or fire hazard which could be caused by the use of electrical equipment in certain areas, the areas are classified and sub-divided into divisions according to the degree of probability of the presence of a dangerous atmosphere. They are interpreted, with particular reference to the hydrocarbon industry, in the institute of Petroleum Electrical Safety Code.

All equipment used by the contractor in classified areas will have a certificate of approval for use in these areas. Certificates are issued by a recognized authority after testing the equipment. Before certified equipment is used for work in a classified area it has to be inspected and approved by a competent electrical authority.

Cont…

Portable Electrical Equipment

Care will be taken to ensure that the contractor's portable equipment is safe to use, as it is a common cause of electrical accidents.

All portable equipment and tools must be run if possible, at 110V and must be provided with plugs and sockets which are not capable of being used on 240V supplies.

Portable equipment, unless double insulated, must be earthed, by using flexible supply cables incorporating an earth continuity conductor.

All insulated equipment which has no external metal work should be used where possible, especially in confined work areas.

Double insulated equipment which has an additional metal or plastic casing insulated from any conductor does not require earthling and is recommended for safe use.

All potable electrical equipment, leads and earth wires will be inspected and tested regularly in accordance with the latest approved procedures by the contractor.

Care will be taken not to overload sockets-
Portable electric tools must be used only on the correct power supply as instructed on the marker's label. They must not be connected to a lighting socket.

The number of connections from a socket is restricted by the current rating of the circuit. The total value of current taken from the circuit must not exceed the value for which for circuit was designed.

***

01. Compressed gas cylinders shall be stored in upright position, protected from heat, direct sunshine, secured from falling and from being struck by moving equipment and shall be capped at all time.
02. Oxygen and fuel gas cylinder shall be separated and clearly marked.
03. Never test for leaks with a flame, use soap water.
04. Full, empty cylinders should not be stored together and such cylinder shall be marked “empty”
05. Cylinders employed on welding/ burning operations should be fitted with flash beck arrestors and secured in the upright position on appropriate trolleys.
06. Never lift or carry cylinders by handing their valves or fittings.
07. Never use pressurized equipment as a step or support.
08. Never apply heat or welding to equipment under pressure.
09. Gas torches and hoses must be removed immediately after complete work in a confined space.

Storage

All gas cylinders shall be inspected on delivery and no cylinder shall be accepted it is defective or damaged, not painted for identification with contents named in Arabic and English or if the valve protection cap is missing.

Gas cylinders will be stored in a safe, dry, well ventilated store prepared for this purpose. Storage shall be planned so that the oldest cylinders are used first.

Cylinder will be stored horizontally, preferably on racks. Acetylene and other liquefied fuel gas cylinders shall be stored upright with the valve at the top.

Flammable gases will be stored at least 50 feet (15.24 meters) from any other building. Firefighting equipment shall be readily available and NO SOMKING notices posted.

Different gases may be stored together only when it is known that it is safe to do so. Oxygen cylinders shall never be stored near any flammable gas cylinders.

Toxic gases shall be stored separately and respirators readily available in case of leakage.

General Handing

Cylinders shall not be off-loaded from vehicles by rolling and allowing them to fall to the ground. Cylinders shall not be rolled or dragged along the ground.

Cylinders shall not be used as rollers, supports, or for any other purpose.

Cylinder transported on vehicles must be properly secured to prevent them rolling or banging together, and the valve protection caps must always be fitted.

Empty cylinders shall be identified by larking with chalk and checked for damage before returning to suppliers.

Empty cylinders shall be handled with the same care as if they were fully.

Oil or grease must not be allowed to come into contract with the valves of oxygen cylinders. Oxygen reacts violently with even traces of petroleum products.

Always keep the metal cap in place to protect the valve when the cylinder is not I use; a blow on an unprotected valve may cause gas under pressure to escape with resulting injury to personnel and damage to property.

Charged cylinders are not designed for use when temperature exceeds 54º C (130 º F) they should therefore never be stored or used near sources of heat or near highly flammable substances.

Because of their shape smooth surface and weight, charged cylinders are very difficult to handle by hand, a two-wheel cart should be provided to move them about.

Do not remove the identify tag, or any number or marks stamped on cylinders.

When compressed gas cylinders must be handled by a crane or lifting device, as may be the case on an elevated construction or maintenance job, they should be lifted one at a time using a cradle or similar device and extreme care taken to make certain they are not dropped.

Never tamper with the valve or safety device on a gas cylinder.

Make certain that the threads on regulator, union, or connection to the cylinder valve outlet corresponds with each other, if not, do not attempt to force the connection. Only experienced, qualified and knowledgeable persons are authorized to connect regulators and supervisor the installation of compressed gas cylinders.

Compressed gas cylinders used by contractor personnel must be provided with a holding bracket or chain and base plate to secure the cylinder properly at the location of use. Sufficient facilities shall be provided for the required number or cylinders.

Before making a connection to the cylinder valve outlet it should be examined for dust or dirt. On cylinder where it is safe to do so, the valve may be cracked open for a second to clear away any dust or dirt from the outlet. On other cylinder the outlet shall be cleared out using a clean, dry, lint-free cloth.

Caution:

Due to the wide explosion limits of hydrogen gas it is not safe discharge a hydrogen cylinder in this way.

Compressed gas cylinders should never be used without a pressure reducing regulator fitted to the cylinder valve outlet, unless the cylinder is properly connected to a manifold with a regulator fitted to each outlet from the manifold. Proper piping downstream of the regulator must be fitted.

Always open a compressed gas cylinder valve slowly. A cylinder not provided with a hand wheel valve should be opened with a suitable key.

Unless the cylinder valve has been tightly closed, never attempt to stop a leak between the cylinder and the regulator. The same applies to leaks down stream of the regulator.

Never use any compressed gas for any purpose other than that for which it is intended.

Users of Gas Cylinder

All personnel involved in the handing, transportation or using of compressed gas cylinders must be thoroughly familiar with and observe the rules and regulations contained in this section.

Those responsible for the use of compressed gas cylinders should make certain, before connecting the cylinder to the system, that the gas content of the cylinder to be used corresponds with the identity tag and is the correct gas for that job.

When in use, compressed gas cylinder should be in an upright position, unless instructions specify otherwise, and the cylinders should be properly secured. When not in use the cylinder shall be collected by the stores representative within 24 hours.

When an empty cylinder had been replaced, the empty cylinder should immediately be marked with chalk and the return procedure commenced. When contractor must ensure that the empty cylinder is collected by the stores representative within 24 hours.

***

1. Any activity that cannot be performed safely from a ladder or hop up platform, will be conducted from approved scaffold .

2. Only approved scaffolds, erected by qualified person shall be used.

3. Do not use barrels , boxes ,brick and other Unsafe substitutes as scaffolding.

4. All scaffolds more than 2m high shall be fitted with hand rails and toe boards on all Exposed sides and ends.
5. Earth leads for welding shall never be attached to scaffolding.

6. All scaffold will be kept free of rubbish and unnecessary material, No material will be stored up on the scaffold ,unless the scaffold is designed and adapted to accept stored material.

7. Always tie access ladders to the scaffold at suitable location. Never climb up Scaffolding, always use the ladder provided. Ensure the ladder is in good condition and Is of sufficient length required.
8. Tools or other equipment shall be carefully lowered and not throw down from a height.
9. No person shall work in scaffolding before checking by a competent person.
10. Never use any incomplete or uncertified scaffold.
11. Ladders must extent at least Iam above the landing or work place.
12. Never use home made or defective ladder.
13. Get a collogue to foot the ladder while you lash the head.
14. Use your both hands to climb the ladder, Use a hoist line to lift material or tools.
15. Don't stand ladder on loose material or learn it against fragile material.
16. Avoid using a ladder at locations near doorways or places where person pass through Frequently .
17. Where situation require, the use of a safety harness will b employed.

See scaffolding procedure attached

SCAFFOLDING PROCEDURE

1. General requirements

Scaffolding shall be provided and maintained in a safe and reliable condition, In areas,
Where work cannot be safely done at ground level or from part of building or other permanent structure.

Scaffolds shall be erected by suitable trained and experience personnel under the supervision of the foreman. Each scaffold shall have a unique number.
Only materials, specifically designed for scaffolding and in good condition shall be used.
Where scaffolding is incomplete a prominent notice 'not for use' hall be displayed.
Scaffolding shall not obstruct escape routes or access to any safety / emergency equipment.

1 Scaffold Certification

All scaffolds shall be inspected on completion and after every alternation, by the foreman Whom shall inspect the scaffold check-list .HSE -11-01,If acceptable, he shall sign and Certify the scaffold as safe for use. A green color 'safe for use' tag will be put on the Scaffold If not acceptable , the scaffold is re inspected after rectification's are done. If For any reason the scaffold is un safe for use ,the scaffold is suitable tagged. " UNSAFE SCAFFOLD – DO NOT USE'

Every scaffold shall be re inspected and re – certified on a weekly basis. Records of inspection made shall be recorded on scaffold inspection register. The site engineer / safety Officer shall ensure that this weekly inspection is done and the register is up to date.

2 Scaffold Construction

- Scaffolding shall be constructed using proprietary metal systems, Including accessories such as couplers and clamps and shall conform to BS 1139 (Metal scaffolding)and to BS 2482 (Timber boards)or equivalent. All scaffolding material shall be checked to ensure That they are free from defects an that the fitting are well lubricated.

- Scaffolding shall be constructed in accordance with BS 5973 & 5974 – Codes of practice For scaffolding ----------

- Scaffolding shall be securely supported an braced ensure stability. Unless constructed as Independent scaffold , all scaffold shall be rigidly connected to the structure.

- All free standing tower scaffolding shall be guyed or tied every 6 meters. If less than 6 meters (20 feet) the height shall not exceed three times its minimum base dimension . Working platforms and decking shall conform to the guidelines as indicated in Appendix A and B.

3 Use of Scaffolding

- No person shall work on a scaffolding with out checking that it is in safe condition, and That a safe for use tag is available on the scaffold.

- Scaffolding shall be used only for its intended purpose. It shall never be overloaded or Extended for any reason whatsoever.

- Where necessary, where hand rails may have been removed , safely harnesses shall be Worn by the person using the scaffold.

- Appropriate Personnel Protective Equipment shall be worn at all times.

- No person other than the designated personnel or the foreman is permitted to carry out Any modification on the scaffold. In this case , are certification of the scaffold is necessary. see section 2.

***

a) Ensure the area is clean and free from combustible materials before starting welding / flame (gas) cutting.

b) Ensure that the site location is free from hazards and obstructions prior to start the job.

c) Screen the cutting area adequately to avoid the spreading / ejection of sparks.

d) Use dust mask and safety goggles while cutting.

e) Avoid loose clothes while doing cutting. They may entangle with the moving parts.

f) Use appropriate PPE like safety helmet, safety shoes, hand gloves, dust mask etc while working.

***

a) Ensure that the site location is free from hazards and obstructions prior to start the job.

b) Screen the cutting area adequately to avoid the spreading / ejection of sparks.

c) Use dust mask and safety goggles while cutting.

d) Avoid loose clothes while doing cutting. They may entangle with the moving parts.

e) Use appropriate PPE like safety helmet, safety shoes, hand gloves, dust mask etc while working.

***

a) Barricade the area while doing pressure testing with proper sign boards.

b) Ensure the flammable materials like adhesives, paints, sealants, and insulation are stored away from the electrical and fire hazards.

Use appropriate PPE (safety helmet, full body harness, safety shoes, etc) while working in the site

***

a) Ensure the location in the site and the access to location if free from hazards for shifting and stacking of cable drums.

b) Check the condition of slings used for rigging the cable drums.

c) Cable drums should be stored on flat surface and secured with wooden wedge stoppers to avoid movement.

d) Cable drums should be stored away from the electrical and fire hazards.

***

f) Check the condition of stand and spindle on which the cable drum is mounted for cable pulling periodically.

g) The location at which the cable pulling is conducted should be free from obstacles.

h) Cable rollers to be used for large cables for ease & safe pulling.

i) Check the condition of the scaffolding (platform, toe boards, guard rails, etc).

j) Lock the casters before mobile scaffolding before climbing the scaffolding.

k) No person shall be on the scaffolding while shifting it from one place to another place.

l) Use full body harness while working on the scaffolding and anchor it properly.

m) The height of the scaffolding shall not be four times the smallest width of the scaffolding if exceeds use outriggers.

n) Use appropriate PPE (safety helmet, safety shoes, heavy duty hand gloves etc.) while working in the site.

***

a) Check that the cable trench is prepared or cable tray / duct installation is done as per the routing shown in the approved construction drawing.

b) Check whether the tray installed is properly supported for the cable installation at high level.

c) Ensure that the length of the cable to be laid is measured correctly.

d) Check the scaffolding / platform / ladder arrangement are safe for high-level work.

e) Ensure that cable is laid in tray / trenches by using cable rollers.

f) Ensure the cutting edges of the cables are covered / protected properly during installation and after installation.

g) Marking shall be done at both end of the cable for identification.

h) Ensure the cable installed on cable tray is tied by using nylon cable tie at a distance of 500mm for vertical installations and 1000mm for horizontal installations.

i) Ensure correct spacing is provided between the cables when multiple cables are laid side by side.

j) Check cables are bent, providing the required bending radius in line with manufacturer's recommendations.

k) After installation of the cables they are to be tested for insulation resistance and continuity.

***

01. Any excavation work, irrespective of depth shall be covered by a permit from area authority prior to start.

02. Any excavation work will be protected by a barrier, and suitable notices, to stop persons accidentally falling into excavation, as well as to clearly identify that an excavation exists.

03. Any excavation 1m or more in depth, a proper access shall be placed to provide both routine and emergency exits from the excavation.

04. Excavation material shall be stored 1m from the edge of the excavation.

05. Excavations and trenches 1.5m or more in depth shall be shored or slopped in any approved manner, to avoid edge collapse.

06. Do not excavate or work in an excavated pit or trench during or directly after a heavy rainfall.

07. The supervisor must inspect the excavation regularly, to assess any potential dangers or safety precautions that may be required.

08. Always employ a bank man on top of the excavation, in case of an emergency. This bank man will ensure that persons within the excavation are not injured by accidental tipping of materials or collapse of the excavation sides.

***

01. Any person who must perform an activity at height, must ensure that he is utilizing the required safety equipment. Where he may be required to stretch over a shutter, or work outside the scaffold area, a safety harness will be worn and tied to a secure section of the scaffold or structure.

02. When working over water, life vests must be worn.

03. Ensure that tools and material are not dropped when working or moving at heights. Always carry tools in a suitable bag. Ensure materials are safety stacked and will not blow or fall over

04. Never throw tools or material to the ground.

05. Always wear suitable foot wear when working on roofs other surfaces that may be slippy.

***

01. Only authorized, trained employees are allowed to operate cranes.

02. Capacity plate and safe working load shall be attached to all crane and clearly marked.

03. Cranes shall not be operated without a safe load indicator

04. Crane operators shall only take signals from properly trained signalman.

05. Never leave the controls of a crane unattended when a load is being suspended.

06. Never guess the weight of a load to be lifted, if in doubt ask you supervisor.

07. No employee shall be permitted to ride the crane hook or load.

08. Always ensure that other persons do not walk under a suspended load.

09. Rigging equipment shall never be overloaded or misused and shall be stored properly after use.

10. Always make other person in the same work area, aware that you are conducting lifting operations.

11. Never conduct lifting operations in heavy windy conditions.

See attachment – Loading / Unloading of Heavy Equipment

***

1. A well maintained and tidy work place decreased the risk of accidents, injuries and fires.
2. Waste material shall not be permitted accumulate and shall be removed to a designated dumping area at the end of the working day.
3. Keeping access ways and emergency exits clear and easily visible at all times.
4. All no smoking areas, gas cylinders flammable storage areas shall be kept clear of rubbish at all time.
5. Spilled oil, grease or other slippery substances in working areas shall be cleaned up immediately or the affected area cordoned off and sprinkled with enough dirt or sand to absorb the eliminate slipping hazards.
6. Never leave hoses, wires, ropes and electric cables where people could trip over him.
7. Remove or bend protruding nails or objects.
8. Stocks goods & materials neatly so that they have no chance of falling.
9. Leave sufficient space between stack to act as gangways.
10. Help to keep the site tidy, good house keeping prevents accidents.

***

1. When you arrive on site or when you change from one site to another make sure that you know the location of the following:

    - Fire aid box
    - Fire alarm
    - Fire & emergency exits.
    - Marshalling points

2. Learn which fire extinguisher you should use for the different types of fire.
3. Keep clam in the event of fire, panic cause disaster.
4. Practice good house keeping at all times.
5. Do not smoke in " No smoking Area"
6. Familiarize yourself with the fire procedures and where to go and to do in case of fire when the alarm is sounded.
7. Any defects or missing extinguishers shall be reported immediately to your supervisor.
8. Ask the safety officer or your supervisor, to explain the procedure to be followed in the event of a fire.
9. When emergency alarm sounds, switch off all running machine and reported to the nearest marshalling point.
10. I you discover a fire , raise the alarm. If it will be safe for you to tackle the fire, hen do so without putting your safety risk, if not, evacuate your work area according to the emergency procedure.

***

1. All accidents, however minor ,must be reported Immediately to your supervisor.
2. Ask your supervisor , what first aid arrangements are available for the site you are working on.
3. Learn how to give basic first aid:-

   - Always keep the injured person warm.
   - Apply pressure to a bleeding wound , if the injured person is bleeding. Use clean piece of cloth as a dressing.
   - Check to ensure that the injured person is breathing and that his throat (airways) is not obstructed.
   - Never move an injured person in case further injuries, unless dangerous situation Skill exits.

4. Always ensure that some body has gone to raise the alarm and summons expert medical help.

***

1) All T1 employees to exercise better awareness to environmental issues as reflected in T1HSEMS.
2) Employees are to take the necessary precautions/action to prevent adverse effects to the physical environment.
3) Where possible segregate the waste in source for recycling.
4) Minimize waste of paper by using paper on both sides.
5) Always keep in mind the following : **REDUCE – REUSE - RECYCLE**

***

A written work permit system procedures and formal actions to ensure that non-routine, potentially hazardous activities are carried out as safely as possible.

Depending upon site conditions and contact, a work permit will be required for all jobs carried out by contractor or his subcontractor, the conditions of which will be strictly complied with all times.

Types of non-routine work for which work permit procedures are normally operated include maintenance and repair, inspection, testing, alteration, construction, reconstruction, dismantling, adoption, modifications and cleaning.

Cold work permit

For any work that does not involve equipment or materials, producing flames or heat or classified as a source of ignition.

Hot work permit

Is either

The performance of work where heat is used, generated or applied and of such intensity as to cause ignition of any combustible or flammable materials.

The use of non flame proof equipment or work that may cause sparks in a hazardous area according to the zone classification of the sit

Mobile vehicle/machinery entry permit

This procedure permits entry to the site of vehicles and mobile machines, other than authorized site vehicles. The procedure provides control of the conditions of entry to eliminate any hazards that may be caused by their presence.

Excavation/Road closure permit

The purpose of the excavation/road closure permit is to ensure the safety of personnel carrying out excavation and to prevent damage to any underground services.

***

Contractors must ensure that welding, cutting, burning, brazing and soldering work is carried out under the conditions of the DHCC work permit system.

Welding on directorate facilities and equipment must be carried out by contractors qualified welders, certified by DHCC concerned department.

Hazards from welding are the dangers of fire and possible danger to health from fumes and from ultra violet and infra red light.

The contractor must make sure that the work area is safe. Some of the precautions to be taken by contractors include:

a) Always obtain permission before welding or cutting.
b) Position fire extinguishers in an accessible position near the welding equipment.
c) Remove all combustible material from the vicinity, if not possible cover with fire resistant material.
d) Clear the work area and cover wooden floor with fire proof mats.
e) Erect fire-resistant screens round the work area to stop flaying sparks.
f) Keep personnel away from the vicinity.
g) Ensure adequate ventilation.
h) Use appropriate eye protection and protective clothing.
i) Keep hoses and welding leads as short as practicable, do not let them obstruct walkways or become tangled or knitted.
j) Never put welding gas cylinders into a confined space.
k) Welding or cutting is not normally permitted on tanks or vessels containing flammable or unidentified liquids.

Personal Protection

Welder's overalls should not have any pockets, or` turn-ups' on the trousers, where sparks could be caught.

Leather or other flame-resistant aprons give additional protection against heat, sparks and flames and must always be worn while welding.

Caps or shoulder covers made of leather or other flame resistant material must be worn when welding is to be done above head level.

Eyes must be protected by well-fitting goggles fitted with the correct filter glass. Goggles must be used by welders and other persons working with welders even when wearing helmets and screens. The screens can then be lifted if necessary.

A welder must always use a helmet type protector or handle-shield type protector which covers and protects his eyes and head.

Hands must be protected by flame resistant gauntlets which come higher over the sleeve.

Fire resistant leggings or high boots must be used for heavy work. For light work safety boots were reinforced toes must be worn.

Breathing apparatus will provide protection from noxious fumes in all places where ventilation in poor. It must be used when working in confined spaces.

***

Hazards and Precautions

The abrasive material used in sand and shot blasting and the particles generated by the process are a serious health hazard both to the operator of the equipment and to other persons in the area.

The regulation safety equipment must be worn when operating the equipment.

Noise is also a hazard when sand or shot blasting is in progress. This can affect the operator and other persons in the area.

The recommended ear protection must be worn by all persons in the are who could be affected.

The nozzle of the equipment must be fitted with a shut-off control of the dead man type. This is essential to reduce the risk of injury to any persons in the area should hose be accidentally dropped.

The nozzle of the equipment must be electrically earthed (grounded) to prevent a static electrical charge from developing.

***

All flammable material shall be cleared from the area before commencing flame cleaning.

Cartridge respirators shall always be worn during flame cleaning.

Flame cleaned surfaces must be allowed to cool to ambient temperature before carrying out solvent power wiping or planning.

The required protective clothing and equipment must be worn during sand blasting or when using power operated hand tools.

Adequate ventilation in necessary during flame cleaning, solvent wiping, paint spraying and the opening of solvent containers and mixing paints.

Forced ventilation must be used in confined spaces.

Barrier creams should be applied to the skin to provide protection against paints and solvents.

Adequate washing facilities must be readily available.

Great care should be taken when using airless spray painting equipment. The airless spray gun operates at very high pressure and the ejected paint can penetrate the skin or cause serious eye injuries. Protective overalls and protection should be worn.

Strong degassing solvents cause skin burns by removing the natural oil from the skin. Alkaline catalysts used in some epoxy paint systems and caused chemical burns if not washed off immediately. Protective gloves should be worn when handling these chemicals.

Paint must be stored on racks in a safe, secure place under proper supervision. Smoking or naked lights are not permitted inside any paint store. Fire extinguishers must be provided inside and out side the store adjacent to the entrance.

***

1 Preliminary Requirements

Following precautionary measures are to be taken before commencement of any Loading/Lifting. Unloading and transportation activity.

a) Responsible Foreman/Supervisor with knowledge and experience of supervising such activities. He is to be present on site during the operation and full responsibility of executing the works in a safe manner will be his.
b) Availability of a telephone on site and availability of important telephone numbers – ambulance, fire, police, including contact numbers of executive managers.
c) Availability of a car/vehicle and a driver.
d) Availability of first aid box/stretcher.

Information should be given to the following informing about the activity to be carried out.

a) Head Office, addressed to the Construction Manager
b) Project Manager of the concerned site.
c) Stores.

There should be at least two skilled personnel, with previous experience in such operations, who should be allocated for this activity.

Only authorized personnel are allowed to operate cranes, lifts or any other equipment, which requires skill and knowledge of the equipment they are handling.

2 Lifting and Unloading Operations

Before any loading/lifting and unloading operation can take place, the supervisor should ensure that all lifting tackles, chains and the crane itself are in good working condition. Consequently, the weight of the items being lifted should be known, so as to not to exceed the safe capacity of the lifting crane.

Preferably, the crane utilized for the operations, should be certified as safe for the specified load by some competent authority.

It must also be known, where the heavy piece of equipment is to be unloaded and any associated constraints associated with the place.

The lifting crane should be positioned and fixed firmly in optimum position, so that the crane operator has a direct view (as far as possible) of the unloading area and the items being lifted /unloaded. When it is not possible, the supervisor/foreman should stand in direct view of the crane operator and should use known/conventional signals to the crane operator.

All personnel involved in the operation should be wearing their personal protective equipment, like helmets (hard hats), safety shoes, coveralls and gloves.

After hooking the slings/attaching hooks the personnel should stand behind in safe position away from possible swings and injuries.

***

Fall Protection and Overhead Works

This is typical procedure as used at Buildings & Villa Apartment Project. It should be reviewed for specific application and finalized / approved before implementation.

FALL PROTECTION & OVERHAD WORKS

1.0 OBJECTIVE

To provide the minimum safety requirements for personnel working on high structures.

2.0 SCOPE

This procedure applies to T1 and sub-contractor personnel assigned to work on high structures or areas where there is danger of falling.

For the purpose of this procedure:

Any work carried out 2.0 meters above the ground or upper floor levels shall require proper scaffoldings.

Personnel assigned to work on scaffolds or near the edge of upper floor shall wear fall protection safety equipment.

3.0 REFERENCES

- **Federal law 8/1980**
- **Local order 32/1982**
- **DM code of construction safety procedure**
- **Trakhees – Guidelines**
- **Al Sa'fat - Dubai Green Building System**
- **DDA – Dubai Development Authority**

4.0 MATERIALS, TOOLS & EQUIPMENT

- Standard PPE(hard hat, coveralls and safety shoes)
- Safety harness
- Hand gloves
- Work Permit
- Scaffold signs(Attachment 1 and 2)
- Lifeline
- Timber for supports

5.0 PROCEDURES:

Fall Protection

HSE Engineer/Safety Office shall:

Check all fall protection safety equipment to ensure that it is manufactured and inspected in compliance with appropriate British Standards or equivalent American or European Standards.

Confiscate and destroy defective fall protection safety equipment to prevent continued usage.

Site Engineer shall provide fall protection equipment for T1 and subcontractor personnel working on areas as stipulated in 2.0.

Overhead Works – Preparation:

- Overhead works as stipulated on 2.0 shall require proper scaffolds.
- No scaffold shall be erected, altered or dismantled except under the immediate supervision of a competent Scaffolding Supervisor/Site Engineer possessing adequate experience of such work.
- Scaffolding Supervisor/Site Engineer shall inspect all materials for any scaffold before being taken for use.

Scaffolding Supervisor/Site Engineer shall:

- Install a "NOT READY FOR USE" sign on scaffolds that are being erected, altered or dismantled.
- Only permit T1 and subcontractor personnel to be upon scaffold that has been inspected and clearly labeled" READY FOR USE".
- Ensure that all erection, alteration or dismantling activities are carried out in such a way those non-involved personnel in the vicinity of the work are not at risk.
- Provide fall protection equipment for T1 and subcontractor personnel working on areas as stipulated in 2.0.
- T1 and subcontractor personnel must be experienced in their work or shall be adequately trained to carry out the work safely.

Overhead works – Inspection:

- Scaffolding Supervisor/Site Engineer shall:
- Ensure that a scaffold/staging inspection logbook is maintained on site to record all inspections.
- Inspect all equipment that shall form any part of the scaffold, means of access, work platform and lifting facility.
- Inspect all scaffolding, inclusive of peripheral equipment prior to work each day. As appropriate, a weatherproof sign shall be placed in each access point and at the boundary of each scaffold section to clearly indicate if the scaffold is "READY FOR USE" or "NOT READY FOR USE".

Overhead Works

Site Engineer Shall:

- Prepare and have the necessary tool, equipment delivered to the worksite.
- Barricade the worksite and install appropriate safety warning signs.
- Assign a minimum practical number of personnel to carry out the work in order to minimize exposure to risks.
- Personnel have been brief in, and understand, the safety aspects of the work.
- Ensure that assigned personnel have been provided with, and are using, the required fall protection safety device.
- Control the work activities.
- Carry out housekeeping activities at the end of each working day and upon completion of work.

T.ONE
UNIVERSAL TRADING L.L.C

12

LIST OF PREVIOUS PROJECTS IN THE LAST 5 YEARS INCLUDING THE TOTAL VALUE FOR EACH PROJECT

LIST OF COMPLETED MAJOR PROJECTS

Sl No.	Project Name	Client	Status	No. of Apartments/ Units
1	Bluewaters, Dubai	Meraas	Completed	96
2	Jumeirah Gate, Dubai	Meraas	Completed	975
3	City Walk, Dubai	Meraas	Completed	501
4	Al Yasmeen, Sharjah	Majid Al Futtaim	Completed	68
5	Medical Centre, Dubai	Meraas	Completed	71
6	NAS Building	Private	Completed	95
7	Saeed Bin Omar	Private	Completed	168
8	Almafi Villas	Engineering Office	Completed	400
9	Golden Mile 3	Nakheel	Completed	131
10	D469, Design and Construction of 30 Nos. Townhouses Development (B+G+1) at Al Safa First (Plot No. 3530400), Dubai, UAE	Engineering Office	Completed	30
11	JH-0022 Madinat Jumeirah Living (MJL) (Phase 4) Aljazi Residential Buildings	Jumeirah Hills Development	Completed	378
12	Golf Grand Project (B + G + P + 15 Floors) Commercial/ Residential Building	EMAAR Development PJSC	Completed	323
13	Elvira Residential Apartments, Dubai Hills Estate Development (B+G+16F+R) Plot 63110897 Dubai Hills, Dubai, UAE	EMAAR Development PJSC	Completed	592
14	DHE - Club Drive Residence - Main Contract Works on Plot No. 63111139	EMAAR Development PJSC	Completed	529

T.ONE
UNIVERSAL TRADING L.L.C

LIST OF IN-PROGRESS PROJECTS

Sl No.	Project Name	Client	Status	No. of Apartments/ Unit	Main Contractor	Consultant
1	The Gramercy J128B Construction of 2B+G+1P+9+R Residential Building at Dubai Hills Estate, Dubai, UAE	Soho	In-Progress	70	New System Engineering LLC	National Engineering Bureau
2	Construction of G + 5 at Nad Al Sheba, Dubai, UAE	Crystal Six LLC	In-Progress	18	High Beam Contracting LLC	Al Fahidi Consulting Engineers
3	Construction of 7 Villas at Jumeirah-1 & 3, Dubai, UAE	Mr. Saleem Abdul Rahim Hassan Saadi Al Rais	In-Progress	14	Al Musallas Building Construction	Al Fahidi Consulting Engineers
4	Avonlea and Bayline Avonlea: G+9 Floors (Tower 1), G+7 Floors Tower 2 Bayline: G+1+P+8 Floors	EMAAR Development PJSC	In-Progress	312	Al Rakha General Contracting LLC	Mirage Leisure and Development
5	Rose Hill Midrise Building on Plot No. PA9B.008 (63111924)	EMAAR Development PJSC	In-Progress	555	Transemirates Contracting LLC	Al Wasl Al Jadeed Consultant
6	The Valley Development, Farm Grove, (G+2+R) + 1 No. Community Centre + 1 No. Guard House, Plot 9154406, Dubai, U.A.E.	EMAAR Development PJSC	In-Progress	482	Al Rakha General Contracting LLC	Mirage Leisure and Development
7	Ocean Views A1246 B+G+5 (Building A) + 6 (Building B) + R on Plot B7.01.08, Rashid Yacht & Marina Development, Dubai, UAE	EMAAR Group Mina Rashid Properties	In-Progress	78	Alserh Al Kabeer Construction LLC	Mirage Leisure and Development

T.ONE
UNIVERSAL TRADING L.L.C

13

PREVIOUS APPROVAL UNDER THE NAME OF SAME SUPPLIER/ MANUFACTURER/ INSTALLER

MINA RASHID EMAAR mirage ASAK

PRE-QUALIFICATION SUBMITTAL

Project: PHASE 1- OCEAN VIEWS - MAIN CONTRACT WORKS ON PLOT B7.01.08 - RASHID YACHT & MARINA DEVELOPMENT

Submittal Ref.No.	OVMR-ASAK-PQN-ARC-0043	***Rev. No.***	00	***Date:***	10 September 2026

Discipline ☐ STR ☑ ARC ☐ MEC ☐ ELE ☐ OTHERS

Enclosure: ☑ Pre-Qualification ☐ Material ☐ Method Statements ☐ Calculation ☐ Shop Drawings
☐ Test Results ☐ O&M Manual ☐ Alternative Material (specify material superseded) ☐ Others (specifiy)

Title & Description:	**Supply & Installation of European Kitchen works**	Spec. Sec. & Clause:
Purpose & Location:	**OVMR- Kitchen Works**	
Manufacturer/Supplier:	**M/s Keller Keukens B.V.**	☐ Submittal with Sample
Sub Contractor:	**M/s Tone Universal Trading LLC**	
Country of Origin:	**NETHERLAND**	☐ Sample Only

Contractor Statement: We certify that the documents submitted herewith has been reviewed in details and is in compliance with the contract drawings and specifications except as otherwise stated here above.

Submitted by Contractor: ALSERHAL KABEER CONST. LLC ASAK PROJECT #1246

Received by Consultant

RECEIVED 10 SEPT 2026 OCEAN VIEW

Consultant Stamp

Engineer's Comments:

NO OBJECTION TO THE PRE-QUALIFICATION OF M/S KELLER KEUKENS / TONE UNIVERSAL TRADING FOR THE SUPPLY AND INSTALLATION OF EUROPEAN KITCHEN CABINETS, SUBJECT TO THE FOLLOWING CONDITIONS:

1. THE CONTRACTOR SHALL CONFIRM THAT ADEQUATE PRODUCTION, SUPPLY AND INSTALLATION CAPACITY AND RESOURCES ARE AVAILABLE TO MEET THE REQUIREMENTS OF THIS PROJECT.
2. THE CONTRACTOR SHALL PROVIDE DETAILS OF THE SUPPLIER/INSTALLER& CURRENT AND COMMITTED PROJECTS, INCLUDING ONGOING EMAAR PROJECTS, AND DEMONSTRATE THAT SUFFICIENT CAPACITY, MANPOWER AND RESOURCES WILL BE ALLOCATED TO THIS PROJECT WITHOUT AFFECTING THE APPROVED PROJECT PROGRAM.
3. THE PROPOSED KITCHEN SYSTEM SHALL BE COORDINATED WITH THE APPROVED DESIGN AND WHITE GOODS/APPLIANCES, ENSURING THAT THE REQUIRED APPLIANCES ARE COMPATIBLE WITH THE PROPOSED CABINET STANDARD SIZES AND DIMENSIONS, INCLUDING ALL NECESSARY CLEARANCES AND SERVICE PROVISIONS.
4. ALL SUBSEQUENT MATERIAL SUBMITTALS, SAMPLES, SHOP DRAWINGS, FIRST IN PLACE MOCK-UPS AND INSTALLATION SHALL FULLY COMPLY WITH THE PROJECT SPECIFICATIONS, IFC REQUIREMENTS AND APPROVED DESIGN, AND SHALL REMAIN SUBJECT TO THE RELEVANT REVIEW AND APPROVAL.
5. THE ATTACHED 5-YEAR WARRANTY IS NOTED, COMMENCING FROM THE DATE OF THE TOC SHALL BE MAINTAINED IN ACCORDANCE WITH THE PROJECT REQUIREMENTS.

☐ Code A ☒ Code B ☐ Code C ☐ Code D ☐ Code E

Reviewed / Confirmed by	Structural	Architectural/ID	Mechanical	Electrical	HSE	Others
Name/Signature		A. PAHITA				
Date		16.09.2026				
EMAAR ✓						
Subconsultant ✓						

ALSERHAL KABEER CONSTRUCTION ASAK 17 SEPT 2026 RECEIVED PROJECT #1246

For. H Sardast

Name - Resident Engineer, MLD *Date*

Note: Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with design concept of the project and general compliance with information given in the contract documents without design liability.

Approval Codes: **A**-Approved **B**-Approved with comments **C**-Not Approved (Re-submit within 14 days)
D-Incomplete, Resubmit **E**-Submitted for Information (No approval required)

APPROVED CLIENT PROJECTS NAKHEEL/ MIRAGE/ EMAAR/ SOHO PROPERTIES

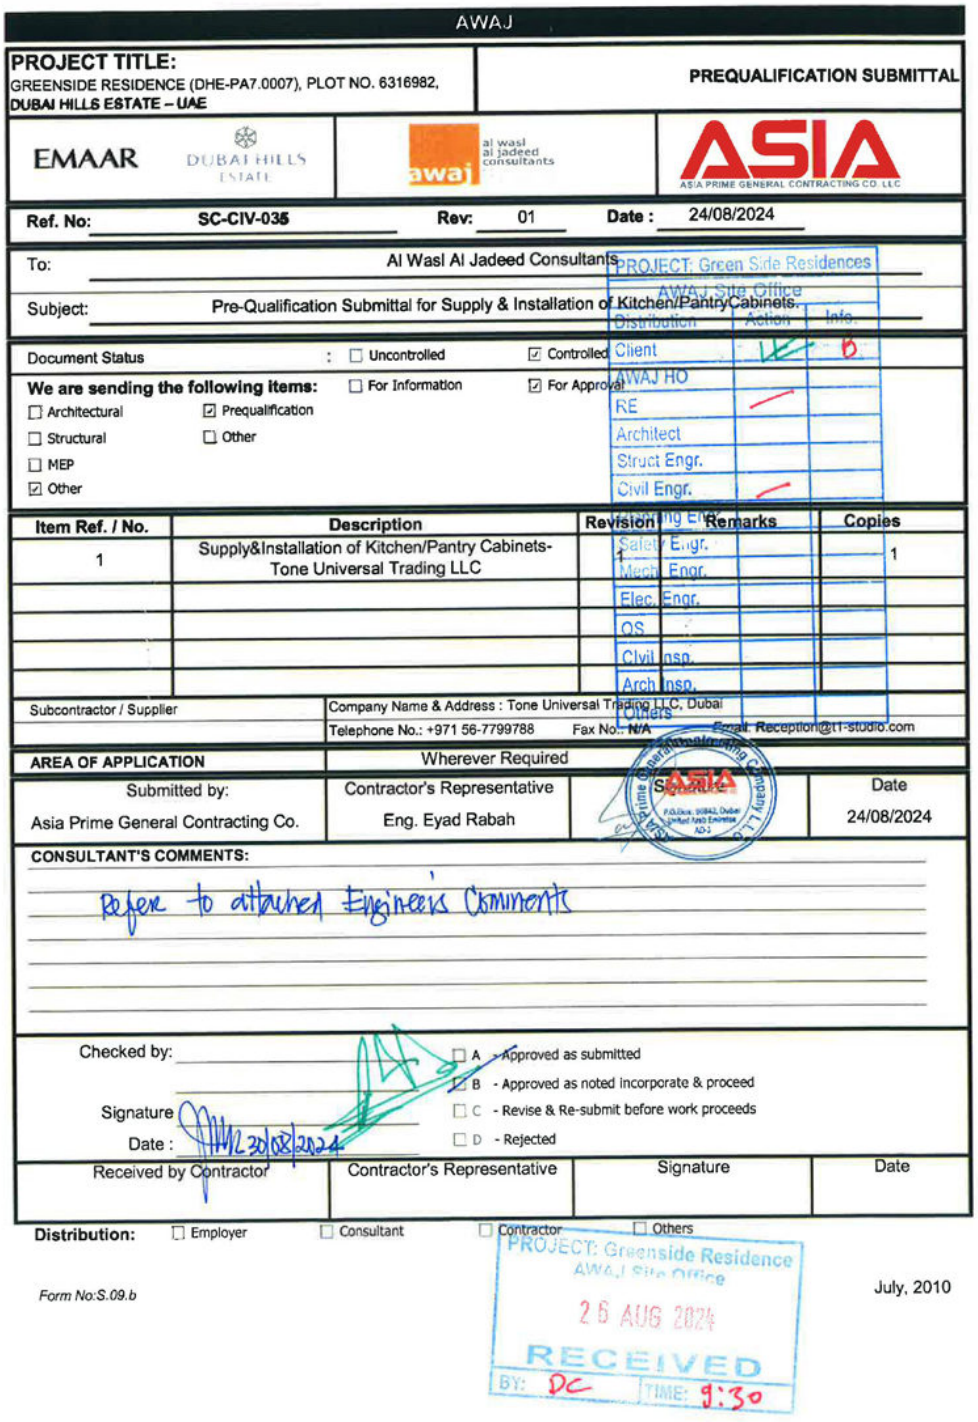

AWAJ

PROJECT TITLE:
GREENSIDE RESIDENCE (DHE-PA7.0007), PLOT NO. 6316982,
DUBAI HILLS ESTATE – UAE

PREQUALIFICATION SUBMITTAL

EMAAR DUBAI HILLS ESTATE | awaj al wasl al jadeed consultants | ASIA ASIA PRIME GENERAL CONTRACTING CO. LLC

Ref. No: SC-CIV-035 **Rev:** 01 **Date :** 24/08/2024

To: Al Wasl Al Jadeed Consultants

Subject: Pre-Qualification Submittal for Supply & Installation of Kitchen/PantryCabinets.

PROJECT: Green Side Residences
AWAJ Site Office

Distribution	Action	Info.
Client		B
AWAJ HO		
RE		
Architect		
Struct Engr.		
Civil Engr.		
Building Engr.		
Safety Engr.		
Mech. Engr.		
Elec. Engr.		
QS		
Civil Insp.		
Arch Insp.		
Others		

Document Status : ☐ Uncontrolled ☑ Controlled

We are sending the following items: ☐ For Information ☑ For Approval

☐ Architectural ☑ Prequalification
☐ Structural ☐ Other
☐ MEP
☑ Other

Item Ref. / No.	Description	Revision	Remarks	Copies
1	Supply&Installation of Kitchen/Pantry Cabinets-Tone Universal Trading LLC	1		1

Subcontractor / Supplier — Company Name & Address : Tone Universal Trading LLC, Dubai
Telephone No.: +971 56-7799788 Fax No.: N/A Email: Reception@t1-studio.com

AREA OF APPLICATION Wherever Required

Submitted by:	Contractor's Representative	Signature	Date
Asia Prime General Contracting Co.	Eng. Eyad Rabah		24/08/2024

CONSULTANT'S COMMENTS:

Refer to attached Engineers Comments

Checked by:

Signature

Date : 30/08/2024

☐ A - Approved as submitted
☑ B - Approved as noted incorporate & proceed
☐ C - Revise & Re-submit before work proceeds
☐ D - Rejected

Received by Contractor	Contractor's Representative	Signature	Date

Distribution: ☐ Employer ☐ Consultant ☐ Contractor ☐ Others

PROJECT: Greenside Residence
AWAJ Site Office
26 AUG 2024
RECEIVED
BY: DC TIME: 9:30

Form No:S.09.b

July, 2010

PRE-QUALIFICATION SUBMITTAL (PQS)

PROJECT NAME : JH-0022 - MADINAT JUMEIRAH LIVING (ALJAZI) – PHASE-4

EMPLOYER	EMPLOYER REP	ENGINEER	MAIN CONTRACTOR
JUMEIRAH HILLS DEVELOPMENT LLC	DUBAI HOLDING REAL ESTATE	NEXT ENGINEERING CONSULTANT	AL SAHEL CONTRACTING CO LLC.

DATE	PRE-QUALIFICATION SUBMITTAL	REF NO
13-May-24		J265-ASCC-CIV-PQS-045

Reference		Attachments	Description/ Material
Specifications	**B.O.Q**	(x) PQ Document	**Pre-qualification of Subcontractor for Kitchen Works - Complete Package (Cabinets, Sanitary Wares, Counter top) by M/s TONE (Keller Kitchen)**
N/A			
Use			
Purpose	**Location**		
Kitchen Cabinet Package	All Apartment's Kitchen		
Subcontractor/ ~~Supplier~~	**Manufacturer**		
TONE (Keller Kitchen)	TONE (Keller Kitchen)		

Engineer's receipt date & sign	Approval requested by (date)	Contractor's stamp & sign

For Engineer's use

Approved		Approved subject to comments	Revise & Resubmit

Engineer's Comments

- A separate declaration letter must be submitted for TONE addressed to DHRE & NEC.
- Warranties should accompany material submittals for final approval.

HOSSAM HASSAN

AL SAHEL CONTRACTING CO. L.L.C.
22 MAY 2024
RECEIVED

Sign & date

(Engineer Signature) RE. Wael Sherif 22-05-2024

Approval from Engineer shall not relieve the contractor from any of his liabilities under the contract and does not supersede any contract document.

EMAAR | mirage | AROMA INTERNATIONAL BUILDING CONTRACTING L.L.C.

PRE-QUALIFICATION SUBMITTAL

Project:	Elvira Residential Apartments (B+G+16F+R) on Plot No. 63110897 at Dubai Hills Estate	Employer:	M/s. Dubai Hills Estate LLC
Engineer:	M/s. Mirage Leisure and Development	Contractor:	M/s Aroma International Building Contracting L.L.C

Discipline	STR	ARC	MEC	ELE	HVAC	Other:	Submittal Ref. No.	DHE-EL-ABC-ARC-PQN-047	Rev. 01
Location (Specify Phase)	Project - PA18 Tower 1&2						Unifier Record No.		
							Date	25/01/2024	

LIST OF SUBMITTED ITEMS:

Item	Description	No. of Copies	Remarks
1	Pre-qualification document of M/s T-ONE Universal Trafding LLC for Kitchen cabinets & work topsupply and installation works.	1 Soft Copy	
		Scope of Work	Kitchen cabinets and work top supply and installation work
REF. SPEC(s):	Section-112600	REF. DWG(s):	

COMPLIANCE STATEMENT: The Contractor hereby confirms that the submitted items have been reviewed in detail and are correct and in strict conformance with the Contract Documents. (Attach compliance statement)

QA/QC Manager	Technical Manager	Project Manager
	SITE OFFICE AROMA INT'L BLDG. CONT. L.L.C.	

ENGINEER'S COMMENTS

A☐ B☑ C☐ D☐ E☐

No technical objection for the proposed supplier in line with the specifications, subject to:
1- Submit the necessary technical submittal, shop drawings, and full prototype for the Engineer's and the Employer approval.
2- The contractor to undertake the work will be done in compliance with the project approved baseline program without any delays due to delivery from Europe.
3- The provided materials shall comply with all the authorities' regulations and green building requirements.
4- Provide Warranty & guarantee as per the project specifications.
5- The Contractor to ensure the compatibility between the proposed materials and other related packages.
6- The supplier to follow the Manufacturer's requirements.

Reviewer's Name: Wael Wadi Signature and Date: Wael Wadi 26/01/2024

Resident Engineer

Signature and Date: Comments Sheet Attached: Yes ☐ No ☐

EMPLOYER'S REPRESENTATIVE COMMENTS A☐ B☐ C☐ D☐ E☐

Name & Signature: Date:

Note: The Engineer's approval shall not in any way relieve the Contractor of his obligation under the Contract. The Contractor shall be solely responsible for the soundness and the correctness of the submitted Materials and Documents as per Clauses 5.1 and 17.4 of the Conditions of Contract.

Approval Codes: A: Approved, B: Approved as Noted, C: Not Approved, Resubmit, D: Rejected, E: Information and Record

PROJECT : DHE GOLF GRAND
PLOT NO : PA07-005 (6314044) AT DUBAI HILLS, DUBAI, U.A.E
CLIENT : EMAAR

Client	Main Consultant	Contractor
EMAAR	Dubai Consultants architects engineers design consultants	TRANS EMIRATES CONTRACTING LLC

SUB-CONTRACTOR PRE-QUALIFICATION

Date of submission: 01-Apr-2024	**Submission No: TEC-P127-DC-PQ-CIV-065**

Civil ☐ **MEP** ☐ **Others** ☐

Description:	Item Specified in Tender:	Proposed Subcontractor:
Kitchen cabinets	**Kitchen cabinets**	**Ms. Tone Universal Trading LLC**

License No: 914812

Expiry Date: 03/11/2024

Copy of Agreement between main contractor and proposed sub-contractor

☐ Attached ☐ Not Attached

Submitted by Contractor

Trans Emirates Contracting
Name: **Mr. Abdul Rehman I Ali**
Designation: **Sr. Project Manager**
Sign:

Received by Engineer

Dubai Consultant
Name: **Mr.Jaahith Hasan**
Designation: **Sr. Project Manager**
Sign:

Engineer's Comments

Refer attached Revert with "Comments Sheets"

Consultant Authorized Signature	
Date	RELDC
Client Authorized Signature	
Date	30/4/2024

Received by Contractor

Name	
Signature	
Date	

Cat	Approval Status		
A	Approved	B	Approved with Comments
C	Revise & Resubmit	D	Rejected

This Approval is limited to the review of the structural design. It does not absolve the contractor and his design team of their responsibility regarding correctness, adequacy and safety of their design and details nor does it relive the contractor from any of his contractual obligations.

Approval Category:
Approved By:

Dubai Consultants
Architects Engineers Design Consultants
P.O. Box 31385 Dubai UAE
T (971 4) 3361 333 F (971 4) 3361 222
www.dubaiconsultants.ae

AWAJ

PROJECT TITLE:	PREQUALIFICATION SUBMITTAL
DHE-B-112-PA9B.0001- Plot No.63111139 – Club Drive Residences	

EMAAR | awaj al wasl al jadeed consultants | Transemirates

Ref. No: TEC-P129-AWAJ-PQ-CIV-037 **Rev:** 1 **Date :** 25-09-24

Submittal Title : Prequalification for Kitchen Cabinet and Work Top Supply and Installatin TRADING LLC

Work From Ms.T-ONE UNIVERSAL

PROJECT:Club Drive Residence
AWAJ Site Office
Location
Distribution (Kitchen Cabinet) Acti... Dn Info.
Client
Super Structure
AWAJ HO
RE
Architect
Struct Engr.
Civil Engr.
Planning Eng.
Safety Engr
Mech. Engr.
Elec. Eng.
Civil Insp.
Arch Insp.
Others

Item No.	Material Description	
1	Kitchen Cabinet and Work Top Supply and Installatin Work	
Manufacturer	Ms.KELLER KITCHENS	
Country of Origin	UAE	
Applicable Standards		
Project specs. Ref.		
BOQ Ref		
Location of use	(Kitchen Cabinet) Super Structure	
Technical Details submitted as	☑ Attachment ☑ Catalogue	
Sample Provided	☐ Yes ☑ No	
Availability of Material	☐ Local ☐ Import	
Lead Time	red	
Time of Delivery to Site	☐ Yes ☐ No	
Supplier Details	Company Name & Address **Ms.T-ONE UNIVERSAL TRADING LLC**	
Ms.T-ONE UNIVERSAL TRADING LLC	Telephone No : Fax No : Email:	
Compliance with Project Specifications	☐ Yes ☑ Alternative (please fill below)	
ALTERNATIVE MATERIAL	:	
Time Implication of Alternatives	No	
Cost Implication of Alternatives	☐ No ☐ Yes	
Reasons for Alternative (*include supporting documents, if any*)		

The above mentioned material is submitted for your review / approval.

Submitted by:	Contractor's Representative		Date
TRANSEMIRATES CONTRACTING	Farooq Ahmed	Signature	25-09-24

CONSULTANT'S COMMENTS:

② Refer to attached Engineers' comments

The aforementioned material has been -

Approved as submitted
B - Approved as noted
A
C Revise & Re-submit
D - Rejected

incorpo... rate & proceed
before ... work proceeds

Name: **Engineer's Representative**
Signature
Date : 27/09/2024

Contractor's Representative

PROJECT:Club Drive Residence
AWAJ Site Office
25 SEP 2024
Signature BY TIME

Received by Contractor
Employer

Distribution: Consultant Contractor Others

Form No:S 09 a

July, 2010

AWAJ

PROJECT TITLE: DHE-PA9B.0003 - Plot No.63111219 – Club Place	PREQUALIFICATION SUBMITTAL

EMAAR | awaj al wasl al jadeed consultants | Transemirates CONTRACTING

Ref. No: TEC-P133-AWAJ-PQ-CIV-051 **Rev:** 00 **Date :** 28/03/2025

Submittal Title : Pre qualification For T.one Universal Trading and Keller Kitchens NL

Item No.	Material Description	Location
1	Pre qualification For T.one Universal Trading and Keller Kitchens NL	Kitchens areas

Manufacturer		M/s Keller Kitchens
Country of Origin		UAE
Applicable Standards		Project.Specs & Authority Regulation
Project specs. Ref.		n/a
BOQ Ref.		n/a
Location of use		Kitchens areas
Technical Details submitted as	: ☐ Attachment	☐ Catalogue
Sample Provided	: ☐ Yes	☑ No
Availability of Material	: ☐ Local	☑ Import
Lead Time Required	: ☑ Yes	☐ No
Time of Delivery to Site		
Supplier Details	Company Name & Address	
M/s Keller Kitchens	Telephone No 42386488	F 42868877
Compliance with Project Specifications	: ☑ Yes	☐ Alternative (please fill below)
ALTERNATIVE MATERIAL		
Time Implication of Alternatives	: ☐ No	☐ Yes
Cost Implication of Alternatives	: ☐ No	☐ Yes
Reasons for Alternative (*include supporting documents, if any*)		

PROJECT: Club Place Residence
AWAJ Site Office

Distribution	Action	Info.
Client	✓	
AWAJ HO		
AE		
Architect	✓	
Struct Engr		
Civil Engr		
Planning Engr		
Safety Engr		
Mech. Engr		
Elec. Eng.		
QS		
Civil Insp.		
Arch Insp.		
Others		

The above mentioned material is submitted for your review / approval.

Submitted by:	Contractor's Representative	Signature	Date
TRANSEMIRATES CONTRACTING	Mr.Abdulrehman.i Ali Sr. Project Manager		28/03/2025

CONSULTANT'S COMMENTS:

* Attached commercial license is expired.
* With reference to letter: TEC/P133/RB/II/03/25 dated 25/03/2025, it is noted that the supplier is rejected by EMAAR in Post Tender Clarification document.

Engineer's Representative
Name:
Signature
Date :

The aforementioned material has been -
☐ A - Approved as submitted
☑ B - Approved as noted incorporate & proceed
☐ C - Revise & Re-submit before work proceeds
☐ D - Rejected

Received by Contractor	Contractor's Representative	Signature	Date

PROJECT: Club Place Residence
AWAJ Site Office
28 MAR 2025
RECEIVED
BY: JC TIME: 9:00 AM

Distribution: ☐ Employer ☐ Consultant ☐ Contractor ☐ Others

Form No:S.09.a

July, 2010

The Employer:	Project Manager & The Engineer:	The Contractor:
MINA RASHID EMAAR MINA RASHID DEVELOPMENT	mirage AL SHANDAGHA Architects & Engineering Consultants MIRAGE LEISURE & DEVELOPMENT	

PREQUALIFICATION SUBMITTAL

Project Name: PHASE 1 – AVONLEA – MAIN CONTRACT WORKS ON PLOT B7.01.06 – RASHID YACHT & MARINA DEVELOPMENT (MINA RASHID)

Submittal Ref.No.	ALMR-ARGC-ARC-PQN-0040	*Rev. No.*	0	*Date:*	16 February 2026

Discipline ☐ STR ☑ ARC ☐ MEC ☐ ELE ☐ OTHERS

Enclosure: ☑ Pre-Qualification ☐ Material ☐ Method Statements ☐ Calculation ☐ Shop Drawings
☐ Test Results ☐ O&M Manual ☑ Alternative Material (specify material superseded) ☐ Others (Document Submittal)

Title & Description:	**Pre-Qualification for Supply & Installation of European Kitchen works by Keller Keukens B.V (Alternative)**	Spec. Sec. & Clause: 06 10 00
Purpose & Location:	**European Kitchen Works**	
Manufacturer/Supplier:	**Keller Keukens B.V. / Tone Universal Trading LLC**	☐ Sample attached
Sub Contractor:	**Tone Universal Trading LLC**	
Country of Origin:	**Netherland**	☐ Sample Only submittal

Contractor Statement: We certify that the documents submitted herewith has been reviewed in details and is in compliance with the contract drawings and specifications except as otherwise stated here above.

Submitted by Contractor

Project Manager

Engr.Baburaj Thomas

Received by Consultant

RECEIVED
16-FEB-2026
Mirage Leisure and Development
AVONLEA
RASHID YACHT & MARINA

Consultant Stamp

Engineer's Comments:

No objection to the pre-qualification submittal from M/s Keller Keukens/ Tone Universal Trading as an alternative for the supply and installation of European kitchen cabinets, subject to the following conditions:

1. The proposed manufacturer and subcontractor shall demonstrate proven experience in European kitchen projects of comparable scale and quality, including the ability to maintain consistent finishes in shade, grain, and color across all joinery works.
2. The contractor shall ensure that the proposed manufacturer and subcontractor have adequate production capacity, technical capability, and quality control systems to deliver consistent joinery finishes.
3. A site visit to a completed project or manufacturing facility may be required to verify quality standards, production capacity, and workmanship.
4. The proposed manufacturer and subcontractor shall demonstrate the ability to coordinate with white goods appliance/ suppliers and interfacing trades, including dimensional and MEP/ service requirements.
5. The proposed manufacturer and subcontractor shall demonstrate compliance with project specifications, IFC documentation, green building requirements, and all applicable authority regulations.
6. The proposed manufacturer and subcontractor shall demonstrate the ability to meet the approved project program without impacting the overall schedule.
7. Final approval of the manufacturer/subcontractor shall be subject to the satisfactory review and acceptance of the first-in-place mock-up.
8. The contractor shall confirm that the proposed manufacturer/subcontractor can provide warranties in line with project requirements.

☐ Code A ☒ Code B ☐ Code C ☐ Code D ☐ Code E

Reviewed / Confirmed by	Structural	Architectural/ID	Mechanical	Electrical	HSE	Others
Name/Signature		AVP				
Date		17.02.2026				
EMAAR ✓						
Subconsultant ✓						

Name - Resident Engineer, MLD *Date* 17/02/2026

Note: Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with design concept of the project and general compliance with information given in the contract documents without design liability.

Approval Codes: **A**-Approved **B**-Approved with comments **C**-Not Approved (Re-submit within 14 days)
D-Incomplete, Resubmit **E**-Submitted for Information (No approval required)

AWAJ

PROJECT TITLE: DHE-PA9B.0008 - Plot No.63111924 – DHE ROSE HILL	Supplier/Subcontractor Pre-qualification Submittal

EMAAR | awaj al wasl al jadeed consultants | Transemirates CONTRACTING

Ref. No: TEC-P140-AWAJ-PQ-CIV-023 **Rev:** 01 **Date :** 4 Mar 2026

To: M/s Al Wasl Al Jadeed Consultants

Subject: **Pre qualification For T.one Universal Trading Kitchens Joinery Works Sub- Contractor**

Document Status : ☐ Uncontrolled ☑ Controlled

We are sending the following items: ☐ For Information ☑ For Approval

☐ Architectural ☐ Drawings
☑ Structural ☐ Catalogue
☐ MEP ☐ Documents (Specify)
☐ Other ☑ Other (Specify..... Kitchens Joinery Works Sub- Contractor

Sr. No.	Ref No.	Description	Revision	Remarks	Copies
1	TEC-P140-AWAJ-PQ-CIV-023	Pre qualification For T.one Universal Trading (Kitchens Joinery Works Sub- Contractor)	1		1

Supplier Details: Company Name & Address: M/s TOne Universal Trading L.L.C
Telephone No.: (971 4 238 6488 P.O Box 478820 Email: T.One Studio <info@t1-studio.com>

AREA OF APPLICATION :

Submitted by:	Contractor's Representative	Signature	Date
TRANSEMIRATES CONTRACTING LLC	Mr.Abdulrehman.jali Sr.Project Manager		4 Mar 2026

CONSULTANT'S COMMENTS:

Please refer to the attached comment sheet

PROJECT: Rosehill Midrise Building
AWAJ Site Office
04 MAR 2026
RECEIVED
BY: TIME: 12:40

Checked by:
Signature
Date : 09 03 2026

☐ A - Approved as submitted
☑ B - Approved as noted incorporate & proceed
☐ C - Revise & Re-submit before work proceeds
☐ D - Rejected

Received by Contractor	Contractor's Representative	Signature	Date

Distribution: ☐ Employer ☐ Consultant ☐ Contractor ☐ Others

The Employer:	Project Manager & The Engineer:	The Contractor:
EMAAR EMAAR Development PJSC	mirage	

PRE-QUALIFICATION SUBMITTAL

Project Name: THE VALLEY DEVELOPMENT, FARM GROVE, 482 NO. VILLAS (G+2+R) + 1 NO. COMMUNITY CENTRE + 1 NO. GUARD HOUSE, DUBAI, UAE

Submittal Ref.No.	FGR1-ARGC-PQN-ARC-0017	*Rev. No.*	0	*Date:*	13 March 2026

Discipline ☐ STR ☑ ARC ☐ MECH ☐ ELEC ☐ OTHERS

Enclosure: ☑ Pre-Qualification ☐ Material ☐ Method Statements ☐ Calculation ☐ Shop Drawings ☐ Test Results ☐ O&M Manual ☐ Alternative Material (specify material superseded) ☐ Others

Title & Description:	**Supply and Installation of Kitchen**	**Spec. Sec. & Clause:** TV-B106-LAC-SPC-ZZZ-IDN-005_VILLA_MATERIAL FINISHES & TV-B106-LAC-SPC-ZZZ-IDN-003_VILLA_KITCHENWARES
Purpose & Location:	**Typical Villas**	Unifier Ref SUB-000857
Manufacturer/Supplier:	**Keller Keuken B.V.**	☐ Sample attached
Sub Contractor:	**Tone Universal Trading LLC**	
Country of Origin:	**Netherland**	☐ Sample Only submittal

Contractor Statement: We certify that the documents submitted herewith has been reviewed in details and is in compliance with the contract drawings and specifications except as otherwise stated here above.

Submitted by Contractor	**Received by Consultant**
Eng. Ashraf Abdelrahman ***Project Manager***	RECEIVED 13 MAR 2026 Mirage Leisure and Development The Valley Development Farm Grove 1 *Consultant Stamp*

AL RAKHA GENERAL CONT. (L.L.C) P.O.Box:121705 Dubai - U.A.E. MC 172 - FARM GROVE 1

Engineer's Comments:

- TRADE LICENSE IS EXPIRED.
- TONE UNIVERSAL TRADING MUST PRESENT AN ACTIVE PROJECT AND/OR KELLER KITCHEN SHOWROOM (IF ANY) FOR REFERENCE / REVIEW OF QUALITY.
- THE CONTRACTOR SHALL ENSURE THAT THE PROPOSED MANUFACTURER & SUBCONTRACTOR HAVE ADEQUATE PRODUCTION CAPACITY, TECHNICAL CAPABILITIES & GOOD CONTROL SYSTEMS TO DELIVER CONSISTENT JOINERY FINISH.
- CONTRACTOR TO ENSURE THAT THE MANUFACTURER & SUB-CONTRACTOR SHALL UNDERTAKE THE WORK IN COMPLIANCE WITH THE PROJECT APPROVED BASELINE PROGRAM WITHOUT ANY DELAYS DUE TO DELIVERY OUTSIDE UAE.
- SUBMIT NECESSARY TECHNICAL SUBMITTAL, MINI-PROTOTYPE, SD, ON-SITE PROTOTYPE FOR ID & CLIENTS REVIEW / APPROVAL

☐ Code A ☑ Code B ☐ Code C ☐ Code D ☐ Code E

Reviewed / Confirmed by	Structural	Architectural/ID	Mechanical	Electrical	HSE	Others
Name/Signature						
Date		17 MAR '26		18 MAR 2026		
EMAAR ✓						
Subconsultant ✓						

AL RAKHA GENERAL CONTRACTING (L.L.C) RECEIVED 18 MAR 2026 MC 172 FARM GROVE 1 P.O. Box: 121705 Dubai U.A.E

Sr. Resident Engineer, MLD *Date* 17/03/2026

Note: Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with design concept of the project and general compliance with information given in the contract documents without design liability.

Approval Codes: **A**-Approved **B**-Approved with comments **C**-Not Approved (Re-submit within 14 days) **D**-Incomplete, Resubmit **E**-Submitted for Information (No approval required)

T.ONE
UNIVERSAL TRADING L.L.C

14

IF IT IS MANUFACTURING UNIT, THEN PROVIDE DETAILS OF MANUFACTURING FACILITY, LIST OF MACHINERY, EQUIPMENT, ETC.

-NOT APPLICABLE-

T.ONE
UNIVERSAL TRADING L.L.C

15

COPIES OF PROJECT COMPLETION/SATISFACTORY SUPPLY COMPLETION CERTIFICATE FROM CLIENTS

-NOT APPLICABLE-

T.ONE
UNIVERSAL TRADING L.L.C

16

LIST OF MANPOWER AVAILABLE AND LIST OF LABORERS FROM MINISTRY OF HUMAN RESOURCES & EMIRATIZATION

LIST OF MANPOWER AVAILABLE

SN	FULL NAME	COMPANY	DESIGNATION
1	Abdulrahman Hesham Moqbel	TONE Universal Trading LLC	Projects Manager
2	MD Shahbaz Alam	TONE Universal Trading LLC	Projects & Control Manager
3	Mahmoud Emad Eleyan Shaheen	TONE Universal Trading LLC	Project Coordinator
4	Imad Salah Ldeen Al Shammaa	TONE Universal Trading LLC	Technical Manager
5	Senahulla Kannadi Paramba	TONE Universal Trading LLC	IT/MEP Head
6	Abdelrhman Marwan Taha Ahmed	TONE Universal Trading LLC	Projects Engineer
7	Ahmed Kasem Shehata Aly	TONE Universal Trading LLC	Installation Engineer
8	Roldan Dinglasan	TONE Universal Trading LLC	Foreman
9	Francis Cabaltera Lagdaan	TONE Universal Trading LLC	Carpenter
10	Mark Anthony Parungao	TONE Universal Trading LLC	Carpenter
11	Abhishek Kumar	DRK Interior Decoration LLC	Carpenter
12	Raju Sharma	DRK Interior Decoration LLC	Carpenter
13	Makkhan Lal Poran Mal Harijan	DRK Interior Decoration LLC	Assistant Plumber
14	Azad Chulleele Peedikayil	DRK Interior Decoration LLC	Foreman
15	Irshad Ali	DRK Interior Decoration LLC	Carpenter
16	Mohammad Akram	DRK Interior Decoration LLC	Carpenter
17	Mohd Imran	DRK Interior Decoration LLC	Carpenter
18	Abdullah Mohammad Rafik Manzar	DRK Interior Decoration LLC	Electrician
19	Avnish Chandrapal	DRK Interior Decoration LLC	Carpenter
20	Gurmeet Singh Ajiab Singh	DRK Interior Decoration LLC	Assistant Electrician
21	Som Lal Rattan Chand	DRK Interior Decoration LLC	Carpenter
22	Surykant Sharma	DRK Interior Decoration LLC	Carpenter
23	Mukesh Kumar Shrama	DRK Interior Decoration LLC	Carpenter
24	Shahajad Alam Ajijullah	DRK Interior Decoration LLC	Carpenter
25	Matiullah Ayub	DRK Interior Decoration LLC	Electrician
26	MD Vasim Ansari MD Nasim Ansari	DRK Interior Decoration LLC	Electrician
27	Mohd Suhail Shahid Husain	DRK Interior Decoration LLC	Electrician
28	Baldev Raj Rattan Chand	DRK Interior Decoration LLC	Carpenter
29	Muhammad Omer Yusuf Farooqi	DRK Interior Decoration LLC	Logistics Officer
30	Liteesh Kumar Vellarakkad Sreedharan	DRK Interior Decoration LLC	Foreman

UNITED ARAB EMIRATES
MINISTRY OF HUMAN RESOURCES & EMIRATISATION

الإمارات العربية المتحدة
وزارة الموارد البشرية والتوطين

RP242462888AE

Establishment Number / رقم المنشأة	Establishment Name / اسم المنشأة
1157773	TONE UNIVERSAL TRADING L.L.C تون يونفرسل للتجارة ش.ذ.م.م
Category/فئة	
2	

Scan QR to verify
يمكنك التحقق بمسح ال QR

The List Of Employees/كشف العاملين بالمنشأة

Passport Number رقم جواز السفر	Person Name اسم الشخص	Card Type نوع البطاقة	Job Name المهنة	Nationality الجنسية	Card Number رقم البطاقة	Contract Type نوع العقد
N00283639	AHMAD MOUSTAFA ALYOUSEF احمد مصطفى اليوسف 00401010214482	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	SYRIA سوريا	124970099 08/04/2027	Limited محدد
P6301531A	FRANCIS CABALTERA LAGDAAN فرانسيس كابالتيرا لاجدان 30406087706320	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	PHILIPPINES الفلبين	124090046 12/03/2027	Limited محدد
V9299781	MD SHAHBAZ ALAM MD ZUBAIR ALAM محمد شهباز علام محمد زوبير علام 10005029064071	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Contracts Manager مدير العقود	INDIA الهند	121224310 29/12/2026	Limited محدد
C2734418	RAYYAN ATHAR VALKI ABU MOHAMMED ريان اطهر فالكى ابو محمد 10003038487198	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Finance Manager مدير المالية	INDIA الهند	118570146 07/10/2026	Limited محدد
A23552131	MOHAMED ALI SOLIMAN ABDELNABY محمد على سليمان عبد النبى 00126108305828	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Legal Advisor استشاري قانوني	EGYPT مصر	123559369 27/02/2027	Limited محدد
NW42B5401	MARTIJN BOELENS مارتيجن بوليلنس 50627098243572	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Manager مدير المبيعات	HOLAND هولندا	119533666 01/11/2026	Limited محدد
A32853588	ABDELRHMAN MARWAN TAHA AHMED عبد الرحمن مروان طه أحمد 00104089878732	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	EGYPT مصر	120731597 11/12/2026	Limited محدد
A39024029	AHMED KASEM SHEHATA ALY احمد قاسم شحاته على 00128089568250	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	EGYPT مصر	123939056 08/03/2027	Limited محدد
LR4034429	BETINA ZAKHIA MOUJAHED بتينا زخيا مجاهد 00211089184452	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	LEBANON لبنان	131959905 19/10/2027	Limited محدد
N01661945	IMAD SALAH LDEEN AL SHAMMAA عماد صلاح الدين الشماع 00401108425742	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	SYRIA سوريا	118338483 03/10/2026	Limited محدد
P7863677C	LARA MAE DENTE PARES ZAMORA لارا ماي دينتي باريس زامورا 30406039335975	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	PHILIPPINES الفلبين	126808239 28/05/2027	Limited محدد
10605132	NABIL ALI KHALIL ALYANAEAI نبيل علي خليل اليناعي 01718115947208	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	YEMEN اليمن	125806592 04/05/2027	Limited محدد
125082798	TAREQ HESHAM TAHA MOQBEL طارق هشام طه مقبل 50127058675039	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	BRITAIN بريطانيا	130243533 31/08/2027	Limited محدد
P7569519B	ROLDAN DINGLASAN DINGLASAN رولدان دينجلاسان دينجلاسان 30401048387182	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Telecommunication Assistant مساعد الاتصالات	PHILIPPINES الفلبين	123982858 09/03/2027	Limited محدد
X3471370	SENAHULLA KANNADI PARAMBA MOHAMED KANNADI PARAMBA ثناء الله كانادى بارمبا محمد كانادى بارامبا 10030058412368	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Telecommunication Assistant مساعد الاتصالات	INDIA الهند	123576883 28/02/2027	Limited محدد
08904255	YESHODA SHRESTHA يشودا شرستا 31619078470018	RENEW ELECTRONIC WORK PERMIT تجديد تصريح عمل الكتروني	Cleaner عامل النظافة	NIPAL نيبال	115377495 30/10/2025	Limited محدد
A29180144	MOHAMED HASSAN ABDELKHALEQ IBRAHIM ELSHAFEI	RENEW ELECTRONIC WORK PERMIT تجديد تصريح عمل الكتروني	Commercial Sales Representative	EGYPT مصر	117807698 13/06/2026	Limited محدد

UNITED ARAB EMIRATES
MINISTRY OF HUMAN RESOURCES & EMIRATISATION

الإمارات العربية المتحدة
وزارة الموارد البشرية والتوطين

RP242462888AE

Establishment Number / رقم المنشأة	Establishment Name / اسم المنشأة
1157773	TONE UNIVERSAL TRADING L.L.C تون يونفرسل للتجارة ش.ذ.م.م

Category/فئة
2

Scan QR to verify
يمكنك التحقق بمسح ال QR

Passport Number رقم جواز السفر	Person Name اسم الشخص	Card Type نوع البطاقة	Job Name المهنة	Nationality الجنسية	Card Number رقم البطاقة	Contract Type نوع العقد
	محمد حسن عبدالخالق ابراهيم الشافعى 00105058901367		مندوب المبيعات التجارية			
P7895959A	KAREN GALZOTE ILETO كارين جالزوتي ايليتو 30416128621575	RENEW ELECTRONIC WORK PERMIT تجديد تصريح عمل الكتروني	Receptionist موظف استقبال	PHILIPPINES الفلبين	113487597 30/10/2025	Limited محدد

Total Number of Employees : 18

عدد العمال الإجمالي : 18

UNITED ARAB EMIRATES
MINISTRY OF HUMAN RESOURCES & EMIRATISATION

الإمارات العربية المتحدة
وزارة الموارد البشرية والتوطين

Establishment Number / رقم المنشأة	Establishment Name / اسم المنشأة
954398	D R K INTERIOR DECORATION L.L.C دى ار كيه لأعمال تنفيذ التصميم الداخلى ش.ذ.م.م
Category/فئة	
3	

RP242462934AE

Scan QR to verify
يمكنك التحقق بمسح ال QR

The List Of Employees/كشف العاملين بالمنشأة

Passport Number رقم جواز السفر	Person Name اسم الشخص	Card Type نوع البطاقة	Job Name المهنة	Nationality الجنسية	Card Number رقم البطاقة	Contract Type نوع العقد
S4660310	ABDULLAH MOHAMMAD RAFIK MANZAR عبدالله محمد رفيق منذر 10015028715004	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	124625867 14/04/2027	Limited محدد
R0227490	AVNISH CHANDRAPAL افنيش شاندرابال 10001018942210	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	124480116 14/04/2027	Limited محدد
Y5972342	AZAD CHULLEELE PEEDIKAYIL ABDUL RAHIMAN VALIYAPOVVAKKAL ازاد شوليلى بيديكال عبدالرحمن فاليابوفاكال 10010058339874	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	124137857 01/04/2027	Limited محدد
R3487629	BALDEV RAJ RATTAN CHAND بالديف راج راتان شاند 10014028806715	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	129455692 09/09/2027	Limited محدد
C5641090	IRSHAD ALI AKHTAR HUSAIN ارشاد علي اختر حسين 10010058162173	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	124406887 14/04/2027	Limited محدد
B8149256	MOHAMMAD AKRAM AKEEL AHAMAD محمد اكرم عقيل احمد 10013090059139	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	124406478 14/04/2027	Limited محدد
P0559400	MUKESH KUMAR SHARMA JALESHWAR SHARMA موكيش كومار شارما جاليشوار شارما 10003059741367	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	126098078 20/05/2027	Limited محدد
C6717405	RAJU SHARMA TILAK SHARMA راجو شرما طلاق شارما 10012088141993	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	123291753 20/02/2027	Limited محدد
W2269094	SHAHAJAD ALAM AJIJULLAH شهاجد عالم عجيج الله 10001010135761	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	129009254 08/08/2027	Limited محدد
Y9018387	SOM LAL RATTAN CHAND سوم لال راتان شاند 10031059167268	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	124751060 21/04/2027	Limited محدد
P3215477	SURYKANT SHARMA BASUDEV SHARMA سوريكانت شارما باسوديف شارما 10005038986566	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	INDIA الهند	126149680 20/05/2027	Limited محدد
DM2850683	USMAN GUL UMAR عثمان جول عمر 20001019613017	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Carpenter نجّار	PAKISTAN باكستان	128930230 24/07/2027	Limited محدد
A37012818	ESLAM FARAG HAMED AHMED KHALIL اسلام فرج حامد احمد خليل 00122070481003	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Construction Carpenter نجار البناء	EGYPT مصر	121551415 06/01/2027 He has an escape report لديه شكوى انقطاع عن العمل	Limited محدد
C5655756	ABHISHEK KUMAR YADAV RAKESH KUMAR YADAV ابيشيك كومار ياداف راكيش كومار ياداف 10008079442005	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Electrician كهربائي	INDIA الهند	124406476 21/03/2027	Limited محدد
V5988514	GURMEET SINGH AJAIB SINGH غورميت سينغ عجايب سينغ 10010089973580	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Electrician كهربائي	INDIA الهند	124753895 21/04/2027	Limited محدد
P2287618	MAKKHAN LAL PORAN MAL HARIJAN مخان لال بوران مال هاريجان 10030077606541	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Electrician كهربائي	INDIA الهند	124104887 12/03/2027	Limited محدد

UNITED ARAB EMIRATES
MINISTRY OF HUMAN RESOURCES & EMIRATISATION

الإمارات العربية المتحدة
وزارة الموارد البشرية والتوطين

Establishment Number / رقم المنشأة	Establishment Name / اسم المنشأة
954398	D R K INTERIOR DECORATION L.L.C دى ار كيه لأعمال تنفيذ التصميم الداخلى ش.ذ.م.م

Category/فئة
3

RP242462934AE

Scan QR to verify
يمكنك التحقق بمسح ال QR

Passport Number رقم جواز السفر	Person Name اسم الشخص	Card Type نوع البطاقة	Job Name المهنة	Nationality الجنسية	Card Number رقم البطاقة	Contract Type نوع العقد
P5126830	MATIULLAH AYUB مطيع الله ايوب 10001019266016	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Electrician كهربائي	INDIA الهند	128994937 08/08/2027	Limited محدد
Y7107841	MD VASIM ANSARI MD NASIM ANSARI مد وسيم انصاري مد ناسيم انصاري 10001019737331	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Electrician كهربائي	INDIA الهند	128994936 08/08/2027	Limited محدد
Y3259904	MOHD IMRAN MOHD SHAFI محمد عمران محمد شافي 10002100254725	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Electrician كهربائي	INDIA الهند	124406477 14/04/2027	Limited محدد
Y6541495	MOHD SUHAIL SHAHID HUSAIN موهد سهيل شهيد حسين 10007050236190	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Electrician كهربائي	INDIA الهند	128994935 08/08/2027	Limited محدد
S0219372	HADEEL MALEK HUSNI JAYOUSI هديل مالك حسني جيوسي 00309058906203	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Interior Designer مهندس تصميم داخلي	JORDAN الاردن	126727527 26/05/2027	Limited محدد
C1598719	ABDULVAHAB SIDDIQ ALI SIDDIQ ALI عبدالوهاب صديق على صديق على 10030058269301	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Light Vehicle Driver سائق مركبة خفيفة	INDIA الهند	121059139 20/12/2026	Limited محدد
LQ1799493	ASIF ALI LIAQAT ALI اصف على لياقت على 20002018983397	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Light Vehicle Driver سائق مركبة خفيفة	PAKISTAN باكستان	123018750 16/02/2027	Limited محدد
KB2745812	IHSAN ULLAH ZARSHED KHAN احسان الله زرشيد خان 20001019940678	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Light Vehicle Driver سائق مركبة خفيفة	PAKISTAN باكستان	132279228 28/10/2027	Limited محدد
AS249436	CHRISTELLE EL DROUBY كريستل الدروبي 60215099544080	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Marketing Manager مدير التسويق	CANADA كندا	119533872 02/11/2026	Limited محدد
EP6274442	ABYOT GEREMEW ALEMU ابيوت جرميو اليمو 40312029290437	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	ATHYUOBYA اثيوبيا	119364808 29/10/2026	Limited محدد
DD5527802	ARSLAN ZAFAR ZAFAR HAMEED KHAN ارسلان ظفر ظفر حميد خان 20012049802652	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	PAKISTAN باكستان	126780414 27/05/2027	Limited محدد
P2040631	LITHEESH KUMAR VELLARAKKAD SREEDHARAN VELLARAKKAD NARAYANAN SREEDHARAN ليتيش كومار فيلاراكاد سريدهاران فيلاراكاد نارايانان سريدهاران 10026017862070	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	INDIA الهند	132124519 23/10/2027	Limited محدد
BL8960403	MUHAMMAD OMER YUSUF FAROOQI AJMAL YUSUF FAROOQI محمد عمر يوسف فاروقى اجمل يوسف فاروقى 20012087044548	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	PAKISTAN باكستان	130146432 27/08/2027	Limited محدد
V3352474	MUZAMMIL POOVULLA PARAMBIL HAMZA PALLAMVEETTIL مزمل بوفولا بارامبيل حمزه بالامفيتيل 10023079709764	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	INDIA الهند	130427486 03/09/2027	Limited محدد
XZ4146842	SALMAN KHAN LIAQAT ALI سلمان خان لياقت على 20030119802502	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	PAKISTAN باكستان	128273118 07/07/2027	Limited محدد
AW8178411	SHAH FAHAD NAVEED ALI شاه فهد نويد على 20001010255176	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Sales Officer موظف مبيعات	PAKISTAN باكستان	128883096 23/07/2027	Limited محدد
V2226492	AJLAN LATHEEF PARAKKAL ABDUL LATHEEF ABOOBAKKAR عجلان لطيف باراكال عبد للطيف ابو بكر	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Telecommunication Assistant مساعد الاتصالات	INDIA الهند	130427350 03/09/2027	Limited محدد

UNITED ARAB EMIRATES
MINISTRY OF HUMAN RESOURCES & EMIRATISATION

الإمارات العربية المتحدة
وزارة الموارد البشرية والتوطين

Establishment Number / رقم المنشأة	Establishment Name / اسم المنشأة
954398	D R K INTERIOR DECORATION L.L.C دى ار كيه لأعمال تنفيذ التصميم الداخلى ش.ذ.م.م

Category/فئة
3

RP242462934AE

Scan QR to verify
يمكنك التحقق بمسح ال QR

Passport Number رقم جواز السفر	Person Name اسم الشخص	Card Type نوع البطاقة	Job Name المهنة	Nationality الجنسية	Card Number رقم البطاقة	Contract Type نوع العقد
	10022079613842					
P2863103B	JENNIFER BISNAR PATRICIO جينيفر بيسنار باتريسيو 30412068555192	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Telecommunication Assistant مساعد الاتصالات	PHILIPPINES الفلبين	118528046 06/10/2026	Limited محدد
TV4129533	MUHAMMAD UZAIR KHAN MUHAMMAD NASIM KHAN محمد ازبر خان محمد نسيم خان 20019078753622	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Telecommunication Assistant مساعد الاتصالات	PAKISTAN باكستان	125909667 05/05/2027	Limited محدد
EP7156444	RAHIMA KEDIR EDAO رحمه كيدر ايدو 40320108223155	NEW ELECTRONIC WORK PERMIT تصريح عمل الكتروني جديد	Telecommunication Assistant مساعد الاتصالات	ATHYUOBYA اثيوبيا	122831445 08/02/2027	Limited محدد
V6423875	SANISHA SATHYARENJAN PUTHIYADATH THOTTUNKARA SATHIARENJAN سانيشا ساتيارينجان بوتيادات توتونكارا ساتيارينجان 10026109460958	NEW ON HUSBAND/FATHER SPONSORSHIP جديد على إقامة الزوج/الأب	Project Engineer مهندس مشاريع	INDIA الهند	129251262 30/07/2027	Limited محدد

Total Number of Employees : 37

عدد العمال الإجمالي : 37

T.ONE
UNIVERSAL TRADING L.L.C

17

DRAFT WARRANTY

Warranty Terms & Conditions

WARRANTY PERIOD

Keller Keukens B.V. provides a **5-year** full warranty covering the quality of the kitchen units and elements manufactured and supplied by Keller. The warranty takes effect from the date of **Taking Over.**

The warranty period of 5 years applies to normal domestic usage, subject to the proper care and maintenance of the kitchen units and elements. For non-domestic usage, the warranty period is **1 year**.

The warranty period on the kitchen units and elements is not extended when works have been carried out under the warranty and/or for units and elements supplied as replacements.

SUBMITTING A REPORT FOR SERVICE

Defects or flaws in the kitchen units must be reported to the dealer within four working weeks by sending an e-mail to dealers@ kellerkeukens.nl. Reports must be accompanied by the order number and a clear photo (s) of the problem.

CONTENTS AND SCOPE OF THE WARRANTY

Keller Keukens issues its warranty to the Keller dealer making the sale. The warranty means that in the event of any flaws in the finish quality or proper performance of the item, the defective part will be repaired or replaced, at the discretion of Keller Keukens B.V., within a reasonable period of time by original or equivalent parts/equipment. The cost for doing so, including transport and call-out charges, will be borne by Keller Keukens. Assembly, travel and/or follow-up costs for the dealer to provide the service to the customer are covered by the warranty.

THE WARRANTY WILL NOT APPLY IF

A. The kitchen units and elements are damaged by third parties during transport or assembly.
B. The kitchen units and elements are not installed professionally.
C. Changes are made to the kitchen in which no original parts are used.

THE WARRANTY DOES NOT COVER

A. Any materials not produced by Keller and materials supplied by third parties, such as kitchen appliances, tapware, accessories and tiles. For these items, the warranty of the individual manufacturer applies.
B. Damage resulting from:
   - External forces, such as damage caused during transport after delivery by Keller or damage resulting from knocks or bumps.
   - Careless usage or maintenance.
   - The use of abrasives and/or aggressive cleaning agents on the kitchen units.
   - Normal wear and tear.
   - Ageing and discolouration caused by the effects of smoke, light and sunlight.
   - Defects caused by too great a load being placed on the kitchen units.
   - Occurrence of heat in excess of the AMK norm of 70 degrees Celsius for cooking and baking appliances and dishwashers.
   - Excessive humidity/vapour. This might include leaks caused by the unprofessional installation of pipework or not adhering to our cleaning instructions.
   - Excessive vapour action caused by appliances, such as kettles and coffee machines, or by open dishwashers or ovens.
   - Damage caused by defective pipework (gas, water, electricity).
   - Damage caused by poorly functioning, improperly installed or incorrectly operated equipment.
   - Extreme changes in humidity, a relative humidity percentage that is persistently higher or lower than 45 to 70% in the space and/ or surrounding area in question, or insufficient ventilation.

GENERAL

A. The fronts of units may warp as a result of insufficient ventilation, incorrect installation, defrosting water or trailing power leads to the refrigerator or freezer. Warping permitted to factory standards is 2.5 mm/m1.
B. Across the wide range of raw materials used, colour, decor and structure are matched as closely as possible. This means that 100% colour-matching is not technically feasible. Consequently, colour differences are unavoidable and claims against the warranty on these grounds are not possible.
C. Keller makes every attempt at all times to keep its products current and to continue improving them. Changes may be made to materials, finishes and dimensions in order to ensure technical progress.
D. Where appropriate, Keller Keukens may decide to return the original part in question for quality improvement. Keller arranges any deliveries and returns with the Keller dealer.